



# User Manual

## TDcH & TDmH – Compact Headend & Mini Headend

Article		Article no.	Article		Article no.
TDcH 16S-I-Q	Compact Headend	492780	TDmH IP	Mini Headend	492770
TDcH 16S-I		492781	TDmH 8S		492772
TDcH 22STC-I		492782	TDmH 8S-I		492773
TDcH 16S-Q		492790	TDmH 14STC-I		492774
TDcH 16S		492791			

Version	V1.11	Date	2025-04-11	EN
---------	-------	------	------------	----

<b>1</b>	<b>SAFETY REGULATIONS AND NOTES</b>	<b>5</b>
<b>2</b>	<b>REVISION HISTORY</b>	<b>7</b>
<b>3</b>	<b>TDCH COMPACT HEADEND &amp; TDMH MINI HEADEND</b>	<b>8</b>
3.1	INTRODUCTION	8
3.2	DESCRIPTION	9
3.2.1	TDcH variants	9
3.2.2	TDmH variants	10
3.2.3	Common Features	11
3.2.4	Upgrade Features (license based)	12
3.2.5	Block diagram	12
3.3	PACKING CONTENTS	12
3.4	TECHNICAL DATA	13
<b>4</b>	<b>MOUNTING THE UNIT</b>	<b>16</b>
4.1	INSTALLING THE DEVICE	16
4.1.1	Example of mounting options for the TDcH	16
4.1.2	Example of mounting options for the TDmH	17
4.1.3	Potential equalisation	17
4.2	DEVICE OVERVIEW	17
4.3	CONNECTING THE DEVICE	18
<b>5</b>	<b>INSTALLATION &amp; EASY SETUP</b>	<b>19</b>
5.1	INSTALLATION	19
5.1.1	Static IP address	19
5.1.2	Physical connection to headend	19
5.1.3	Starting service tool	19
5.1.4	System status LED	20
5.1.5	Input LEDs	20
5.1.6	Output LED	20
5.1.7	Reset button	21
5.2	FIRST TIME LOG IN	22
5.3	TDCH & TDMH WEB INTERFACE (GUI)	24
5.3.1	Error indication	25
5.3.2	Save configuration	25
5.3.3	Admin options	25
5.3.4	Dashboard	25
5.3.5	Channel Status Details	27
5.3.6	Report Issue	27
5.3.7	Admin menu	28
5.4	SETTINGS	30
5.4.1	Ethernet Port 1 (Management Port)	30
5.4.2	System reset	31
5.4.3	Ethernet port 2	31
5.4.4	SFP interface	31
5.4.5	VLAN at SFP interface	32
5.4.6	Stacking Mode	33
5.4.7	Device Name	34
5.4.8	Output Modulation	34
5.4.9	Channel Plan	34
5.4.10	Language	36
5.4.11	Timezone	36



5.4.12	Time / internal clock.....	36
5.4.13	Country.....	36
5.4.14	Device Description.....	37
5.4.15	Installer .....	37
5.4.16	Installer Email and Phone.....	37
5.4.17	SNMP.....	37
5.4.18	Change Password .....	37
5.5	STACKING.....	38
5.6	INPUT CONNECTIONS .....	42
5.6.1	DVB-T2/C input.....	42
5.6.2	DVB-S2X inputs.....	42
5.6.3	Connections in GUI .....	42
5.6.4	Description/Alias .....	43
5.6.5	Single Satellite Reception .....	43
5.6.6	Multiple satellite reception .....	45
5.7	RF INPUTS.....	47
5.7.1	Terrestrial and Cable tuner setup.....	48
5.7.2	Satellite tuner setup .....	52
5.7.3	Service List.....	57
5.8	IP INPUT .....	58
5.8.1	Physical connectivity .....	58
5.8.2	IP-in licenses.....	58
5.8.3	Requirements .....	59
5.8.4	Configuration in GUI.....	60
5.9	MEDIA PLAYER.....	62
5.9.1	Physical connectivity and storage .....	62
5.9.2	Media Player licenses.....	62
5.9.3	Requirements, supported formats and codecs.....	63
5.9.4	Configuration Media Player in GUI; Upload content.....	64
5.9.5	Configuration Media Player in GUI; Convert PDF content.....	65
5.9.6	Configuration Media Player in GUI; Convert MP4 and MPG content.....	66
5.9.7	Configuration Media Player in GUI; List mode and Schedule more.....	67
5.9.8	Configuration Media Player in GUI; Constraints .....	68
5.9.9	Configuration Media Player in GUI; Configure with content in List mode .....	69
5.9.10	Configuration Media Player in GUI; Configure with content in Schedule mode.....	70
5.9.11	Configuration Media Player in GUI; Media Player Editor Access .....	71
5.10	CONFIGURATION MEDIA PLAYER SIMPLE GUI.....	72
5.11	CAM .....	73
5.11.1	CAM / Smart card.....	74
5.11.2	CAM configuration .....	74
5.11.3	Common interface.....	77
5.11.4	Reset CAM.....	77
5.12	SCRAMBLER .....	78
5.12.1	VSecure Scrambler .....	79
5.12.2	Pro:Idiom Scrambler.....	80
5.12.3	No scrambler license .....	80
5.13	RF OUTPUTS.....	81
5.13.1	Channel plan .....	82
5.13.2	Select service .....	83
5.13.3	QAM Modulation .....	84
5.13.4	COFDM Modulation .....	86
5.13.5	TSID and SID Management – RF Output .....	87

5.13.6	<i>PID Management – RF Output</i> .....	88
5.13.7	<i>Multiple services – RF Output</i> .....	89
5.13.8	<i>Rename services – RF Output</i> .....	89
5.13.9	<i>Configure service type – RF Output</i> .....	89
5.14	IP OUTPUT .....	90
5.15	LICENSE .....	90
5.16	REQUIREMENTS .....	90
5.17	HARDWARE .....	90
5.18	IPTV OUT CONFIGURATION IN GUI .....	91
5.18.1	<i>TSID and SID Management – IP Output</i> .....	93
5.18.2	<i>Rename Service – IP Output</i> .....	93
5.18.3	<i>Configure service type – IP Output</i> .....	93
5.18.4	<i>PID Management – IP Output</i> .....	94
5.18.5	<i>Multiple services – IP Output</i> .....	94
5.19	LCN PAGE .....	95
5.19.1	<i>Network Settings</i> .....	95
5.19.2	<i>Service Discovery</i> .....	98
5.19.3	<i>EPG</i> .....	100
5.19.4	<i>LCN</i> .....	100
5.20	OVERVIEW .....	101
5.20.1	<i>Export to Excel</i> .....	102
5.21	DIRECT ACCESS VIA URL .....	104
5.22	DIRECT FILE DOWNLOAD VIA URL .....	104
<b>6</b>	<b>SUPPORT</b> .....	<b>106</b>
<b>7</b>	<b>TERMS AND ABBREVIATIONS</b> .....	<b>107</b>

## 1 Safety regulations and notes

### ATTENTION

- Failure to comply with the specified precautionary measures may cause serious injury to persons or damage to property.
- The assembly, installation, additional electrical wiring, servicing installation and commissioning may only be performed by suitably qualified persons, technicians, or installers in compliance with safety regulations.
- Damage due to improper installation and commissioning, defective connectors on cables or any other incorrect handling will void the warranty.

### CAUTION

- The device meets the EU directives **2011/65/EU, 2014/30/EU and 2014/35/EU**.
- The safety requirements are according to the standards EN 62368-1 resp. EN 60728-11 and must be observed, especially concerning equipotential bonding and earthing.
- Observe the relevant country-specific standards, regulations and guidelines on the installation and operation of antenna systems.
- Before starting installation or service work disconnect the receiving system from mains.
- Installation or service work should NEVER be undertaken during electrical / thunderstorms.
- Avoid short circuits!
- To ensure electromagnetic compatibility, make sure all connectors are tightly mounted, and that cables and connectors are of the right quality / screening.
- Prior to linking the T/C input port with a terrestrial antenna, it's imperative to ensure that a RED-compliant filter or amplifier is installed between the antenna and the headend to adhere to the directive.
- Take action to prevent static discharge when working on the device!
- Due to the risk of fires caused by lightning strikes, we recommend that all mechanical parts (e.g. distributor, equipotential bonding rail, etc.) be mounted on a non-combustible base. Wood panelling, wooden beams, plastic covered panels and plastic panels are all examples of combustible bases.



#### Back up battery:

The unit includes a preinstalled Lithium battery (CR2032) as backup power source for the clock.

Type: Panasonic BR-2032/BN, Battery, Coin Cell, Single Cell, 3 V, 2032, 225 mAh

Do not attempt to replace the non-rechargeable coin-cell battery. Replacement of the battery must only be done by a special trained technician.

**There is a danger of an explosion if the coin-cell battery is incorrectly placed. The lithium battery contains lithium and can explode if it is not properly handled or disposed of. Replace only with a battery of the same type. To avoid possible injury or death, do not: (1) Throw or immerse into water, (2) allow it to heat more than 100°C (212°F) or (3) attempt to repair or disassemble it. Dispose of it as required by local ordinance or regulations and your company's safety standards.**



### To prevent fire, short circuit or shock hazard

- Do not expose the unit to rain or moisture.
- Install the unit in a dry location without infiltration or condensation of water. In case of the formation of condensation wait until the system is completely dried.
- Do not expose it to dripping or splashing.
- If any liquid should accidentally fall into the cabinet, disconnect the power plug.
- Install the head-end station where it is protected from direct exposure to sunlight.
- Install the head-end station not within the immediate vicinity of heat sources.
- Do not install the head end in cabinets or recesses which are not ventilated.
- Do not place any vessels containing liquids on the head-end station.
- Do not place anything on the head-end station which could initiate fires.



### To avoid any risk of overheating

- Install the unit in a well aired location and keep a minimum distance around the apparatus for sufficient ventilation.
- Do not place anything on the unit that might cover the ventilation holes.
- Do not install the product in a dusty place.
- Use the apparatus only in moderate climates (not in tropical climates)
- Respect the minimum and maximum temperature specifications.
- Ensure that the headend station is adequately ventilated.



### To avoid any risk of electrical shocks

- Controller must be correctly grounded according to applicable national regulations.
- For a complete disconnection from the mains, the mains plug must be pulled out of the mains socket. Ensure that the mains plug can be pulled out without difficulties.
- Pull out power plug when making connections of cables.
- To avoid electrical shock, do not open the housing.



### To avoid interferences with LTE services in Europe

- Do not select a channel higher than UHF 48 in countries with LTE II / 700 operation.
- Do not select a channel higher than UHF 60 in countries with LTE I / 800 operation.
- Use coaxial cables with screening effectiveness of >85dB (Class A) at least or >95dB (Class A+)



### WEEE disposal



Electronic devices should never be disposed of in the household rubbish. In accordance with directive 2011/65/EU of the European Parliament and the European Council from June 8, 2011 which addresses old electronic and electrical devices, such devices must be disposed of at a designated collection facility. At the end of its service life, please take your device to one of these public collection facilities for proper disposal.

## 2 Revision history

Revision	Date	Changes
1.0		TDcH Compact Headend user manual - First release
1.1		Management Port description added
1.2		New Compact Headend Version TDcH 16S-I and TDcH 22STC-I added
1.3		SCR (Satellite Channel Router) description added
1.4		IP-out functionality added
1.5		IP-in functionality added
1.6	2023-12-07	<p>Besides updating screen dumps and general updating, feature description added for</p> <ul style="list-style-type: none"> <li>• VSecure scrambling</li> <li>• Alternative EIT (EIT Barker) for all RF inputs (DVB-S2/C/T2).</li> <li>• Alias for naming input connections.</li> <li>• Rename a service at the output page</li> <li>• Payload indication at CAM page added</li> <li>• 8 days EIT option added to existing 4 days EIT option for schedule EIT.</li> </ul> <p>Document based on features in SW version 2.6.0.</p>
1.7	2024-04-17	Added TDmH variants 492770, 492772, 492773, and 492774.
1.8	2024-05-23	Added VLAN and Service Overview via URL features. Added description for time.
1.9	2024-06-26	Small explanation corrections for VLAN and Service Overview via URL features. Added PRO:IDIOM feature and new variants supporting PRO:IDIOM: 492787, 492788, 492775 and 492776.
1.10	2024-10-31	Stacking feature plus Service Overview file via GUI.
1.11	2025-04-10	Media Player feature and Trial Period added. Available from SW 4.9.

## 3 TDcH Compact Headend & TDmH Mini Headend

### 3.1 Introduction

TRIAX offers two series of headend variants.

The TDcH Compact Headend was the first series introduced in the market. This highly reliable headend series offers many stable features and is flexible in variants and licenses.

Years later, the TDmH Mini Headend was introduced as a miniature series based on the highly reliable TDcH. This headend series was introduced to offer even more variants for different applications.

This user manual is for both headend series. Some of the features listed are only available in TDcH or in specific variants.

## 3.2 Description

TDcH and TDmH Headend supports DVB-S2X, DVB-T2, DVB-C and IP-in receiving and conversion to IPTV and/or QAM / COFDM modulation with the possibility to decrypt and/or scramble services centrally in the headend.

Built for wall- as well as 19" racks mounting and equipped with up to 4 DVB-S2X inputs, 1 DVB-T2/C input and 1 IP input, 16 DVB-S2X tuners, 6 DVB-T2/C tuners, 16 QAM or COFDM modulators and 8 CI slots.

The TDcH and TDmH Headends are optimized and engineered to meet specific TV distribution requirements in hospitality, multi-dwelling units and related sectors.

Our brand new, intuitive platform smoothly integrates easy installation, an intuitive and elegant graphical user interface, central decryption, remote access, and straightforward TV service updates with LCN.

### 3.2.1 TDcH variants

<b>TDcH 16S-Q</b> <b>[492790]</b>	4 x SAT IF inputs with integrated multiswitch 16 x DVB-S2 tuners 1 x IP (RJ45 or SFP LC duplex) 16 x QAM full band modulators
<b>TDcH 16S-I-Q</b> <b>[492780]</b>	4 x SAT IF inputs with integrated multiswitch 16 x DVB-S2X tuners 1 x IP (RJ45 or SFP LC duplex) 8 x CI interfaces 16 x QAM full band modulators
<b>TDcH 16S</b> <b>[492791]</b>	4 x SAT IF inputs with integrated multiswitch 16 x DVB-S2 tuners 1 x IP (RJ45 or SFP LC duplex) 16 x QAM or COFDM full band modulators
<b>TDcH 16S-I</b> <b>[492781]</b>	4 x SAT IF inputs with integrated multiswitch 16 x DVB-S2 tuners 1 x IP (RJ45 or SFP LC duplex) 8 x CI interfaces 16 x QAM or COFDM full band modulators
<b>TDcH 16S-I-PROIDIOM</b> <b>[492787]</b>	Identical to TDcH 16S-I [492781], plus with support for Pro:Idiom (LG) scrambling.
<b>TDcH 22STC-I</b> <b>[492782]</b>	4 x SAT IF inputs with integrated multiswitch 1 x Terr / Cable input with integrated splitter 16 x DVB-S2 tuners 6 x DVB-T/T2/C tuners 1 x IP (RJ45 or SFP LC duplex) 8 x CI interfaces 16 x QAM or COFDM full band modulators

**TDcH 22STC-I-PROIDIOM [492788]** Identical to TDcH 22STC-I [492782], plus with support for Pro:Idiom (LG) scrambling.

### 3.2.2 TDmH variants

**TDmH IP [492770]** 48 x IPTV inputs SPTS and MPTS UDP/RTP  
1 x IP (RJ45 or SFP LC duplex)  
8 x QAM or COFDM full band modulators

**TDmH 8S [492772]** 4 x SAT IF inputs with integrated multiswitch  
8 x DVB-S2X tuners  
1 x IP (RJ45 or SFP LC duplex)  
8 x QAM or COFDM full band modulators

**TDmH 8S-I [492773]** 4 x SAT IF inputs with integrated multiswitch  
8 x DVB-S2 tuners  
1 x IP (RJ45 or SFP LC duplex)  
4 x CI interfaces  
8 x QAM or COFDM full band modulators

**TDmH 8S-I-PROIDIOM [492775]** Identical to TDmH 8S-I [492773], plus with support for Pro:Idiom (LG) scrambling.

**TDmH 14STC-I [492774]** 4 x SAT IF inputs with integrated multiswitch  
1 x Terr / Cable input with integrated splitter  
8 x DVB-S2 tuners  
6 x DVB-T/T2/C tuners  
1 x IP (RJ45 or SFP LC duplex)  
4 x CI interfaces  
8 x QAM or COFDM full band modulators

**TDmH 14STC-I-PROIDIOM [492776]** Identical to TDmH 14STC-I [492774], plus with support for Pro:Idiom (LG) scrambling.

### 3.2.3 Common Features

#### 4 x SAT IF inputs

- Integrated multi switch
- SCR (Satellite Channel Router) support
- DiSEqC support
- LNB LOF configuration

#### 1 x Terr – Cable input (TDcH 22STC-I, TDmH 14STC-I)

- Integrated splitter

#### 1 x Connections

##### IP input

- SID and TSID management, PID management
- XSPF supported

##### RF input

#### 16/8 x DVB-S2 tuners (except TDmH IP)

#### 6 x DVB-T/T2/C tuners (TDcH 22STC-I, TDmH 14STC-I)

#### 8/4 x CI interfaces

- (all variants with “I” include in the name)

#### 16 x QAM full band modulators

(TDcH 16S-Q, TDcH 16S-I-Q)

- Electronically adjustable output level
- Suitable for adjacent channels, option for disabling individual channels
- Adjustable Symbol rates and modulation

#### 16 x QAM or COFDM full band modulators

(all variant except TDcH 16S-Q and TDcH16S-I-Q)

- Electronically adjustable output level
- Suitable for adjacent channels, option for disabling individual channels
- For QAM adjustable Symbol rates and modulation, and for COFDM adjustable modulation, FEC and Guard Interval

#### Service Multiplexing

- Service Multiplexing at each output transponder to optimize available bandwidth
- Service Multiplexing at the CA modules to reduce amount of needed CAM’s
- Service routable from any input to any output

#### SID, TSID and ONID management

- To handle conflicts during multiplexing
- To carry out changes if required
- To replace a service with another service without any need for re-tuning the TVsets.

#### HTML user interface via self-signed HTTPS

#### PID management

- To handle PID conflicts
- PID filtering, for example to reduce audio channels from a TV service
- Distribute the same TV service multiple times with different languages
- To replace a service with another service without any need to re-tune the TVsets

#### Service naming

- Distribute the same TV service multiple times with different language and different name
- Give the service an alternative name
- If a service has no original name, an optional service name can be configured
- If multiple services have the same original name, unique service names can optionally be configured.

#### EPG management

- EPG handling to manage the amount of EPG-data distributed in an output transponder

#### Transport Stream Processing

- Network Information Table (NIT) for complete head-end station
- LCN (Logical Channel Numbering)

#### Transparent Transport Stream routing

- A whole untouched transponder can be routed to CAM to ensure all metadata are intact and present for the CA module
- A whole untouched transponder can be routed to an output to ensure all metadata is present or just for debug

#### Payload measurement

- Realtime payload measurement at CI slot to monitor transport stream to CAM is fine and not overloaded with services
- Realtime payload measurement at RF output to monitor transport at output is fine and not overloaded with services
- Realtime payload measurement at CI slot, RF output and IP output to monitor if data exists at all

#### SNMP traps

- To remotely monitor changes
- Supported traps described in the MIB

### 3.2.4 Upgrade Features (license based)

#### IP-in

The IP-in functionality requires an activation license key.

Additional to common features, supported functionalities for IP-in:

- Receive up to 96 x UDP or RTP MPEG-TS multicast streams
- Specify source address and port to ensure correct source
- Licenses comes in
  - 4 x IP SPTS or MPTS inputs
  - 16 x IP SPTS or MPTS inputs
  - 48 x IP SPTS or MPTS inputs
  - 96 x IP SPTS or MPTS inputs


#### IP-out

The IP-out functionality requires an activation license key.

Additional to common features, supported functionalities for IP-out:

- Stream up to 100 UDP MPEG-TS multicast streams
- Supported Service Discovery protocols: M3U, M3Ue, M3Uepp, XSPF
- EPG for all IP out services in Samsungs XML format for SINC or REACH server
- EIT for current service inside the SPTS streamed via UDP/RTP multicast direct to the TV set

### 3.2.5 Block diagram

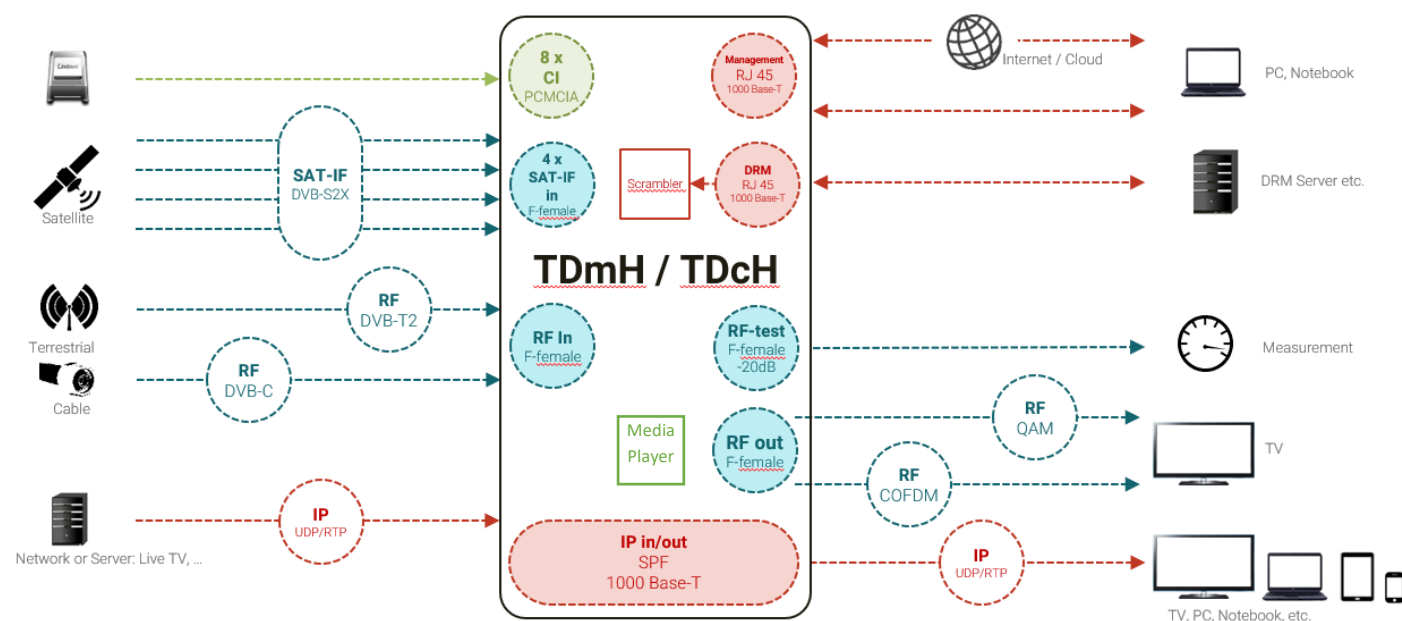

#### Note:

IP-in license-based function

IP-out license-based function

### 3.3 Packing contents

1 piece	TDcH Compact headend or TDmH Mini headend
1 piece	Mains cable
2 pieces	Wall mounting brackets
4 pieces	Screws

3.4 Technical data

Type	TDcH 16S-Q	TDcH 16S	TDcH 16S-I-Q	TDcH 16S-I	TDcH 22STC-I	TDmH IP	TDmH 8S	TDmH 8S-I	TDmH 14STC-I
Art. number [Pro:Idiom (LG)]	492790	492491	492780	492781 [492787]	492782 [492788]	492770	492772	492773 [492775]	492774 [492776]
Interfaces									
Management Interface	1 x 1000 Base-T (RJ 45)								
SimulCrypt / DRM	1 x 1000 Base-T (RJ 45) not supported with current software release								
Ip-in and –out	1 x 1000 Base-T (SFP)								
CI slots	-	-	8 x PCMCIA (front access)			-	-	4 x PCMCIA (front access)	
USB	USB 2.0, Type A conn (Data transfer, additional storage,...) not supported current software release					-	-	-	-
DVB-S2X input									
Satellite inputs	4 x F connectors, 75 Ω, 400 mA per input LNB power feed					-	4 x F connectors, 75 Ω, 400 mA per input LNB power feed		
Number of transponders	16					-	8		
Frequency range	950 – 2150 MHz					-	950– 2150 MHz		
Level range	44 – 90 dBμV					-	44 – 90 dBμV		
Return loss	> 10dB					-	> 10dB		
DVB-S modulation	QPSK; 8PSK, 16APSK, 32APSK (16APSK and 32APSK will be supported in later SW version)					-	QPSK; 8PSK, 16APSK, 32APSK (16APSK and 32APSK will be supported in later SW version)		
DVB-S modes	QPSK 1/2, 2/3, 3/4, 5/6, 7/8					-	1/2, 2/3, 3/4, 5/6, 7/8		
DVB-S2 modes	QPSK 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK 3/4, 4/5, 5/6, 8/9, 9/10					-	QPSK 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK 3/4, 4/5, 5/6, 8/9, 9/10		
Multistream	Supported					-	Supported		
Symbol rate DVB-S	QPSK: 1 – 45 MSymb/s					-	QPSK: 1 – 45 MSymb/s		
Symbol rate DVB-S2	QPSK: 4.5 – 45 MSymb/s					-	QPSK: 4.5 – 45 MSymb/s		
	8PSK: 4.5 – 45 MSymb/s						8PSK: 4.5 – 45 MSymb/s		
	16APSK: 4.5 – 39 MSymb/s						16APSK: 4.5 – 39 MSymb/s		
	32APSK: 4.5 – 32 Msymb/s						32APSK: 4.5 – 32 Msymb/s		
Max. data rate / tuner	83 Mbit/s					-	83 Mbit/s		
Input selection	DiSEqC 1.0 Control 13/18VDC, 22kHz and SCR via JESS (EN 50607:2015)					-	DiSEqC 1.0 Control 13/18VDC, 22kHz and SCR via JESS (EN 50607:2015)		
DVB-T/T2/C input									
Terrestrial / Cable input	-	-	-	-	1 x F connector, 75Ω	-	-	-	1 x F connector, 75Ω
Tuners	-	-	-	-	6	-	-	-	6
Supply voltage DVB-T antenna	-	-	-	-	Not supported	-	-	-	Not supported
Input frequency range	-	-	-	-	47 – 862 MHz	-	-	-	47 – 862 MHz
Channel bandwidth	-	-	-	-	7/8 MHz	-	-	-	7/8 MHz
Level range	-	-	-	-	40 – 95 dBμV	-	-	-	40 – 95 dBμV
Input noise	-	-	-	-	< 7 dB	-	-	-	< 7 dB
Return loss	-	-	-	-	> 10 dB	-	-	-	> 10 dB
DVB-T									
Demodulator type	-	-	-	-	COFDM	-	-	-	COFDM
Modulation DVB-T	-	-	-	-	QPSK, 16QAM, 64QAM	-	-	-	QPSK, 16QAM, 64QAM
Channel bandwidth	-	-	-	-	6/7/8 MHz	-	-	-	6/7/8 MHz
FFT modes	-	-	-	-	2k, 8k	-	-	-	2k, 8k
Code rate	-	-	-	-	1/2, 2/3, 3/4, 5/6, 7/8	-	-	-	1/2, 2/3, 3/4, 5/6, 7/8
Guard interval	-	-	-	-	1/4, 1/8, 1/16, 1/32	-	-	-	1/4, 1/8, 1/16, 1/32
DVB-T2									
Demodulator type	-	-	-	-	COFDM	-	-	-	COFDM
Modulation DVB-T2	-	-	-	-	QPSK, 16QAM, 64QAM, 256QAM	-	-	-	QPSK, 16QAM, 64QAM, 256QAM
Channel bandwidth	-	-	-	-	6/7/8 MHz	-	-	-	6/7/8 MHz
FFT modes	-	-	-	-	1k, 2k, 4k, 8k, 16k, 32k	-	-	-	1k, 2k, 4k, 8k, 16k, 32k
Code rate	-	-	-	-	1/2, 3/5, 2/3, 3/4, 4/5, 5/6	-	-	-	1/2, 3/5, 2/3, 3/4, 4/5, 5/6

Type	TDcH 16S-Q	TDcH 16S	TDcH 16S-I-Q	TDcH 16S-I	TDcH 22STC-I	TDmH IP	TDmH 8S	TDmH 8S-I	TDmH 14STC-I
Art. number [Pro:Idiom (LG)]	492790	492491	492780	492781 [492787]	492782 [492788]	492770	492772	492773 [492775]	492774 [492776]
Guard interval	-	-	-	-	1/4, 19/128, 1/8, 19/256, 1/16, 1/32, 1/128	-	-	-	1/4, 19/128, 1/8, 19/256, 1/16, 1/32, 1/128
DVB-C									
Demodulator type	-	-	-	-	QAM	-	-	-	QAM
Modulation	-	-	-	-	16QAM, 64QAM, 128QAM, 256QAM	-	-	-	16QAM, 64QAM, 128QAM, 256QAM
Symbol rate	-	-	-	-	1 - 7,2 MS/s	-	-	-	1 - 7,2 MS/s
IP-Input									
Number of IP input streams	4, 16 or 96 x SPTS/MPTS ( <i>license required</i> )					48 x SPTS/MPTS	4, 16 or 48 x SPTS/MPTS ( <i>license required</i> )		
Data interface	1 x 1000 Base-T SFP or Fibre SFP ; 1000BaseX (SerDes) mode								
Protocols	IEEE802.3 Ethernet SPTS Streaming (VBR) including PAT, SDT, PMT, CAT and EIT MPTS Streaming (VBR) including PAT, SDT, PMT, CAT and EIT Multicast UDP and RTP MPEG Transport Stream via IP Protocol								
IP packet format	MPEG								
IP-Bitrate	max. 950 Mbit/s at SFP interface for all SPTS streams								
CI interfaces									
Supported CAM vendors	-	-	Aston, Neotion, SMARDTV, SMiT			-	-	Aston, Neotion, SMARDTV, SMiT	
Supported modules and cards	-	-	Conax: Canal Digital (Nordic), Telewizja (Poland), T Home (Hungary) Cryptoworks: ORF (Austria), UPC Direct (Hungary) Irdeto: ORF (Austria) Nagravision: Canal Digital (NL), Canal + (France), Cyfra (Poland), Cyfrowy (Poland), Multicanal (Spain), UPC, NDS, Viasat (Nordic + Baltic) Viaccess: Fransat (France), Eurosport (Poland)			-	-	Conax: Canal Digital (Nordic), Telewizja (Poland), T Home (Hungary) Cryptoworks: ORF (Austria), UPC Direct (Hungary) Irdeto: ORF (Austria) Nagravision: Canal Digital (NL), Canal + (France), Cyfra (Poland), Cyfrowy (Poland), Multicanal (Spain), UPC, NDS, Viasat (Nordic + Baltic) Viaccess: Fransat (France), Eurosport (Poland)	
Bitrate	-	-	Configurable: 50, 72, 96Mbps			-	-	Configurable: 50, 72, 96Mbps	
PID and service limit	-	-	PID and service limit is given by the CAM			-	-	PID and service limit is given by the CAM	
Supply voltage	-	-	5V			-	-	5V	
RF output									
RF out	1 x F connector								
HF measuring output	1 x F connector, -20 dB								
Frequency range	306 – 862 MHz								
Channels	S 21 – C 69								
Channel settings	16 channels in a row, single channels can be switched off					8 channels in a row, single channels can be switched off			
Return loss	> 10 dB								
Output impedance	75 Ω								
QAM modulation									
Output level range	85 – 95 dBμV								
Modulation scheme	QAM 16, 32, 64, 128, 256								
Dynamic phase error	< 0.3								
MER	> 43 dB								
Symbol rate	3.5 – 7.2 MS/s								
COFDM modulation									
Output level range	-	83 – 93 dBμV	-	83 – 93 dBμV					
Carrier to spurious ratio:	-	> 60 dB	-	> 60 dB					
Modulation scheme:	-	QPSK, 16 QAM, 64 QAM	-	QPSK, 16 QAM, 64 QAM					
MER	-	>=40dB	-	>=40dB					
Output mode:	-	2k	-	2k					
Guard intervals:	-	1/4, 1/8, 1/16, 1/32	-	1/4, 1/8, 1/16, 1/32					
IPTV Output									
Number of IP output streams	100 x SPTS ( <i>license required</i> )					48 x SPTS ( <i>license required</i> )			
Data interface	1 x 1000 Base-T SFP or Fibre SFP ; 1000BaseX (SerDes) mode								
Protocols	IEEE802.3 Ethernet SPTS Streaming (VBR) including PAT, SDT, PMT, CAT and EIT								

Type	TDcH 16S-Q	TDcH 16S	TDcH 16S-I-Q	TDcH 16S-I	TDcH 22STC-I	TDmH IP	TDmH 8S	TDmH 8S-I	TDmH 14STC-I
Art. number [Pro:Idiom (LG)]	492790	492491	492780	492781 [492787]	492782 [492788]	492770	492772	492773 [492775]	492774 [492776]
	Multicast UDP and RTP MPEG Transport Stream via IP Protocol 7 TS packets pr. Ethernet packet								
IP packet format	MPEG								
IP-Bitrate	max. 950 Mbit/s at SFP interface for all SPTS streams								
PID-Filtering and Remapping	Yes								
TTL	1-255 (default 16)								
EIT	Inside SPTS for current service								
XML EPG	EPG data in XML format as specified by Samsung Configurable language and Maturity Rating Country for XML EPG								
Scrambling									
VSecure (Philips) [Philips TV + special CAM]	-	-	-	License required 48 x		-	-	License required 48 x	
Pro:Idiom (LG) [Special hardw. variants required]	-	-	-	24 x		-	-	24 x	
LYNK (Samsung)	-	-	-	License required (future) 48 x		-	-	License required (future) 48 x	
Simulcrypt (128bit AES)	-	-	-	License required (future) 48 x		-	-	License required (future) 48 x	
Features									
SNMP	SNMP traps (license required)								
Media Player	2 or 4 Media Players (license required) Input file formats: TS, MP4, MPG, PDF Supported conversion video codec: MPEG2, H.264 Supported conversion audio codec: AAC, AC3, MP3, MP2 Max bitrate configurable [1-50Mbps]; Internal storage: 2GB								
Common NIT/SDT/EIT	Option via license					-	-	-	-
Stackable (common GUI plus feature to Common NIT/SDT/EIT)	Option via license					-	-	-	-
General									
Mains supply	100 - 264 VAC, 50/60 Hz								
Ground connection	Ground clamp								
Power consumption * Without CAM and LNB power	*typ. 35 W, max. 90 W	*typ. 32 W, max. 90 W	*typ. 39 W, max. 90 W	*typ. 36 W, max. 90 W	*typ. 46 W, max. 90 W	typ. 20W, max. 25W	typ. *30 W, max. 65 W	typ. *33 W max. 73 W	typ. *40 W, max. 80 W
Ambient temperature	-10°C to +50°C								
Dimensions in mm	(W x D x H) 434 x 220 x 90					(W x D x H) 434 x 168 x 45			
Weight	3.8 kg	3.8 kg	4.0 kg	4.1 kg	4.1 kg	2.6 kg	2.8 kg	3.0 kg	3.1 kg

## 4 Mounting the unit

### 4.1 Installing the device


The TDcH & TDmH can be mounted in a 19" rack or wall mounted in any direction needed.

Ensure that the unit is correctly grounded, according to applicable national regulations.

Ensure that min. 4 cm ventilation space is available on both sides of the equipment, so that the fans and ventilation holes are not covered!


#### 4.1.1 Example of mounting options for the TDcH

**An example of mounting options for the TDcH similar option can also be applied to TDmH.**

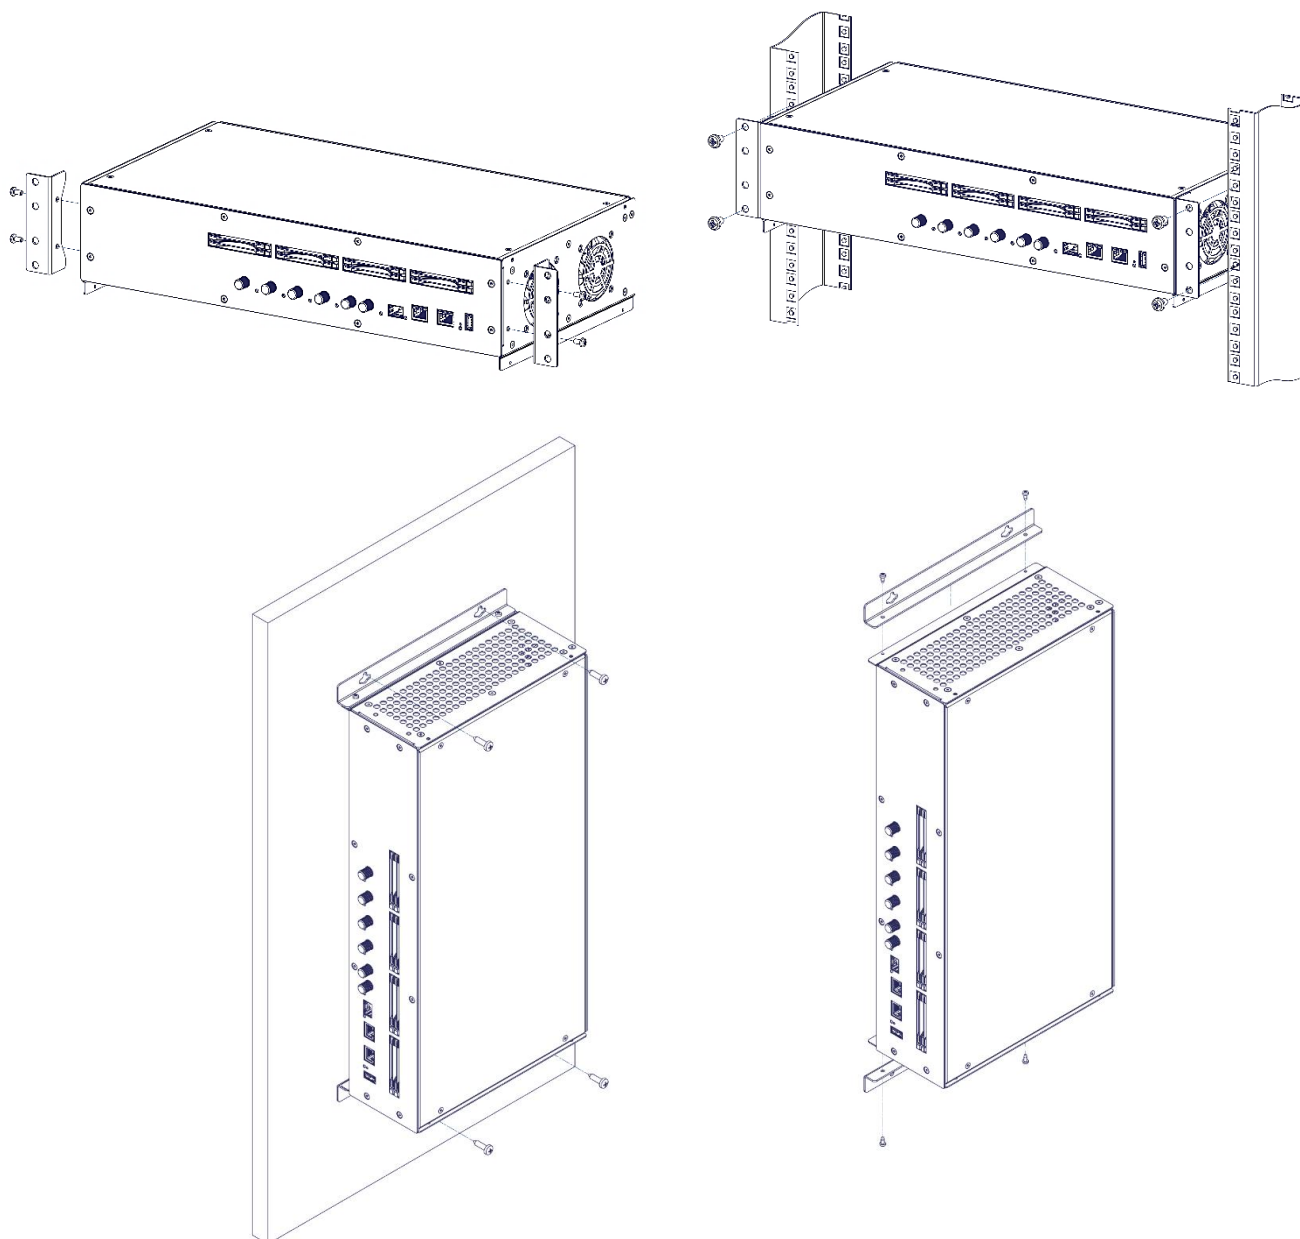

#### 4.1.2 Example of mounting options for the TDmH

The positioning of the TDmH brackets when installing the headend in either a rack or wall mount configuration. The 19" rack mounting is the default position of the brackets, but the installer can change to wall mount installation, by removing the 2\*4 screws and turn the brackets, and mount the 2\*4 screws again.

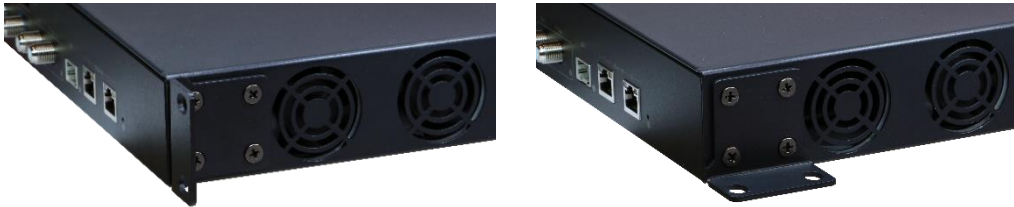

#### 4.1.3 Potential equalisation

Equalise the potential (PE) in accordance with IEC/EN/DIN EN 60728.

Connect the PE connection terminal to a PE rail (supplied by customer) using the PE wire (Cu 4 mm<sup>2</sup> - 9 mm<sup>2</sup>).




### 4.2 Device overview



**Possible connections:**

- 1 F-conn for DVB-C/T/T2
- 4 F-conn for DVB-S/S2/S2X
- 1 F-conn for test (-20dB)
- 1 F-conn for TV-out (QAM or COFDM)
- 1 SFP for IP IN and IP OUT (UDP/RTP)
- 1 RJ45 for Internet/Cloud/Management
- 1 RJ45 for DRM server
- 4 or 8 PCMCIA for CI cards (4 TDmH, 8 TDCh)
- 1 USB for future use (TDCh only)

- COAX
- IP
- HDMI

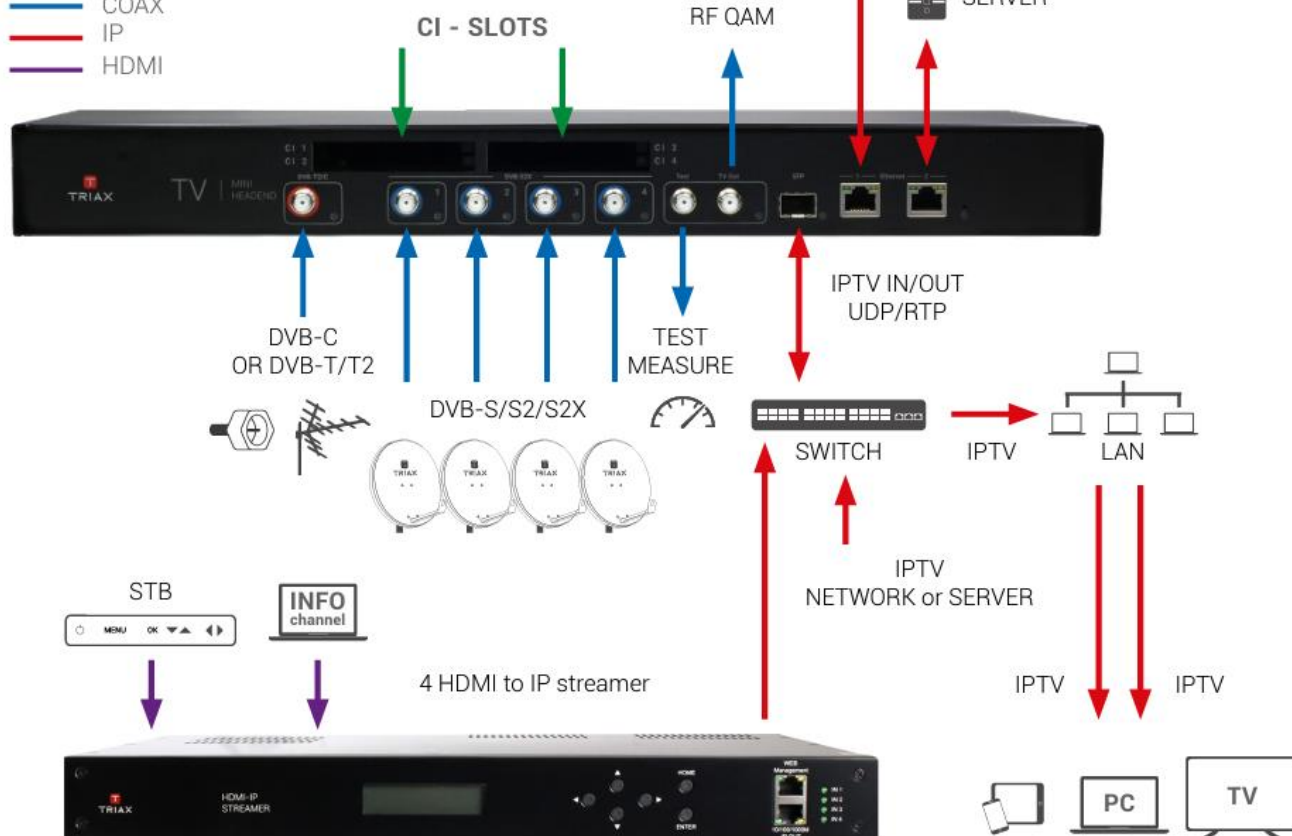

### 4.3 Connecting the device

Connect the SAT IF inputs to the corresponding outputs of an LNB or multi switch. Make sure that all inputs have the same level and are in the required level range!

Connect the Terr/Cable input to the corresponding output of a terrestrial or cable distribution. Make sure that the input level is in the required level range!

Connect the included mains cable to the IEC connector.

Connect the mains cable to a mains socket with protective conductor connection. Note the voltage specified on the device.

This device has no power switch and starts immediately after connecting the operating voltage.

Configure the device as described in the chapter “Installation & Easy Setup”

Once the programming is finished, connect the RF output to the cable network.

## 5 Installation & Easy Setup

### 5.1 Installation

#### 5.1.1 Static IP address

A static address must be used on the computer you use to configure the headend. Refer to the computer's operating software documentation for assistance on using static IP addresses.

#### 5.1.2 Physical connection to headend

Connect a Cat5e shielded cable or better between the computer's network port and the management port on the headend.



**Note:**

Please use Ethernet port 1 to connect your PC to the headend

Ethernet port 2 is reserved for future use. Currently the management GUI can't be reached at this port. The port is configured to get the IP address via DHCP.

#### 5.1.3 Starting service tool


Open a web browser window.

Recommended browser:

- Google Chrome version 90.x.x.x
- Mozilla Firefox version 88.x.x
- Microsoft Edge 90.x.x.x

Enter **http://192.168.0.100** in the web address field. Press **Enter**.

Enter the password. Press the **Login** button.

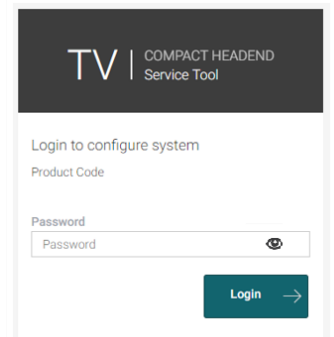

**Note:**

Password = **triax1234** when the service tool is opened on each headend for the first time. At the first login to the unit, the password must be changed to a unique password, as described in the section "Change password".

Up to 10 sessions can be opened and logged in to the same units user interface!

If the user does not log out, the session will be kept open.

When the 11<sup>th</sup> session is opened the first login session will be closed.



# TRIAX

## 5.1.4 System status LED

### Input LED indications

Below the reset button there is a general system status LED.  
The following status LED indications are available:



<b>Off:</b>	The system is turned off
<b>Flashing green:</b>	The system is starting up
<b>Flashing orange (green+red):</b>	Software update in progress
<b>Steady green:</b>	System is up and running OK. No error seen within the last 24 hours. All demodulators using this input is OK (tuned/locked). CA modules are descrambling OK. No packages dropped at outputs.
<b>Steady red:</b>	At least one error has occurred in the system within the last 24 hours. E.g. one or more demodulator(s) using this input indicate(s) ERROR (not locked/tuning lost), descrambling fails at one or more CA modules, or packages dropped at a least one output.

## 5.1.5 Input LEDs

### Input LEDs indication



<b>Black (Off):</b>	This input is not in use by any demodulator
<b>Amber (Green+Red):</b>	One or more demodulator(s) using this input, indicates WARNING (bad signal (C/N to high, level to low, etc...))
<b>Red:</b>	One or more demodulator(s) using this input, indicates ERROR (not locked)

## 5.1.6 Output LED

### Output LED indications



<b>Green:</b>	All outputs are OK
<b>Red:</b>	One or more output(s) indicates ERROR (overload)

### 5.1.7 Reset button

The following Reset functions are available:



When the reset button is pressed (during startup) until the LED flashes green, then the system resets to factory defaults.

When the reset button is pressed (during startup) until the LED flashes red, then the system starts in recovery mode.



## 5.2 First time log in

First time logging in to the system, a free trial period will be offered.

### Free Trial Period

**Trial Period**  
Start 30-day Trial Period. During the Trial Period all licensed features are available for trial. Please visit [www.triax.com](http://www.triax.com) at any time to obtain needed licenses.

**Manual termination of the Trial Period**  
The Trial Period can be manually terminated in the Admin menu.


**Expiration of the Trial Period**  
The Trial Period automatically ends after 30 days.

☐ Don't show this message again

CloseStart

If chosen not to use the Trial Period, then chose "Close". If the Trial Period offer shall not popup again, then chose "Don't show this message again".


The Trial Period can also be started via the Admin menu, if the Trial Period offer is not used.

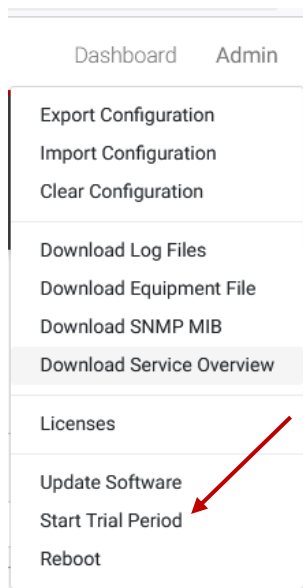


The Trial Period will run for 30 days. During the this period all licensed features are available for trial.

After 30 days the Trial Period will automatically ends, if not manually terminated. When the Trial Period ends, the system will restart and start up in normal mode, where some features need installed licenses to work.

The Trial Period can manually be terminated in the Admin menu.

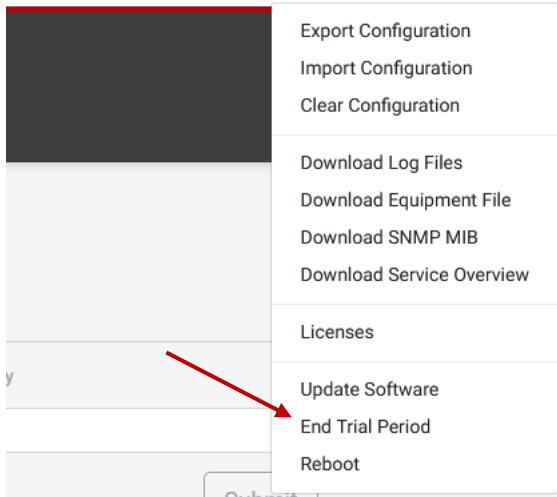

The remaining time for an ongoing Trial Period is show as a popup, and at the top to the GUI.

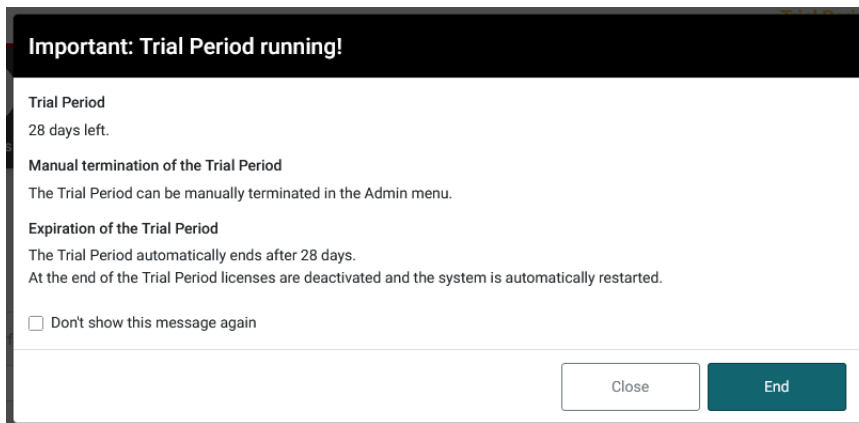

It is possible to install licenses under the Trial Period. After the Trial Period is terminated, the installed license will have effect. Thus, if a license required feature is configured then it will work if required license installed.

After the Trial Period ended, the GUI will highlight the missing licenses if the system is configured with license required features. The missing licenses will not be highlighted during the Trial Period.

In general it is suggested that the Trial Period ends by manual termination, to ensure that all licenses is install.

If decided not to install the missing licenses, the configuration shall be adjusted to remove the warning for the missing licenses.

It is suggested that no warning exist at a system at all, because a warning for e.g. missing IP-out licenses may mask for other important warnings.



### 5.3 TDcH & TDmH web interface (GUI)


- |                                     |   |
|-------------------------------------|---|
| A. Information window               | D. Installation wizard function to continue or go one step back |
| B. Navigation bar                   | E. Save Configuration   |
| C. Administrator and Dashboard menu |   |


When logged in, you will be met by 8 panes:


- |                |   |
|----------------|---|
| 1. Settings    | basic settings of the system (TDcH & TDmH setup)                          |
| 2. Connections | assign input cables to available tuners                                   |
| 3. Inputs      | configure to desired provider and services                                |
| 4. CAM         | assign services to CAMs (only shown if the model supports it)             |
| 5. Scrambler   | assign services to scrambler (only shown if the model supports it)        |
| 6. Outputs     | assign services to outputs  |
| 7. LCN         | assign services to required LCN number and configure the network settings |
| 8. Overview    | see the complete assignment from inputs to outputs                        |


Less than 8 panes might be shown if the TDcH & TDmH model does not support the feature. E.g. CAM and Scrambler panes are not shown for TDcH & TDmH models without CI slots.

### 5.3.1 Error indication

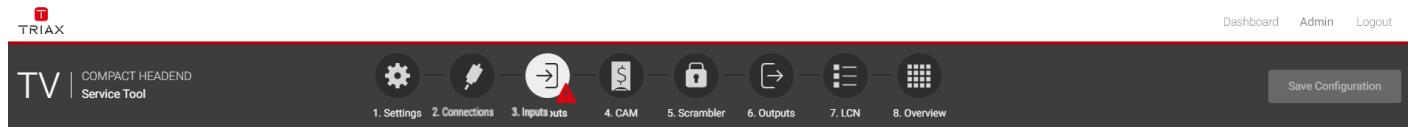


If there is an error in any part of the configuration, the user interface indicates this with a  symbol in the relevant sector of the navigation menu. In other parts of the user interface the error symbol is also used to indicate an error or configuration failure.



Any warnings are indicated by a  symbol.

### 5.3.2 Save configuration

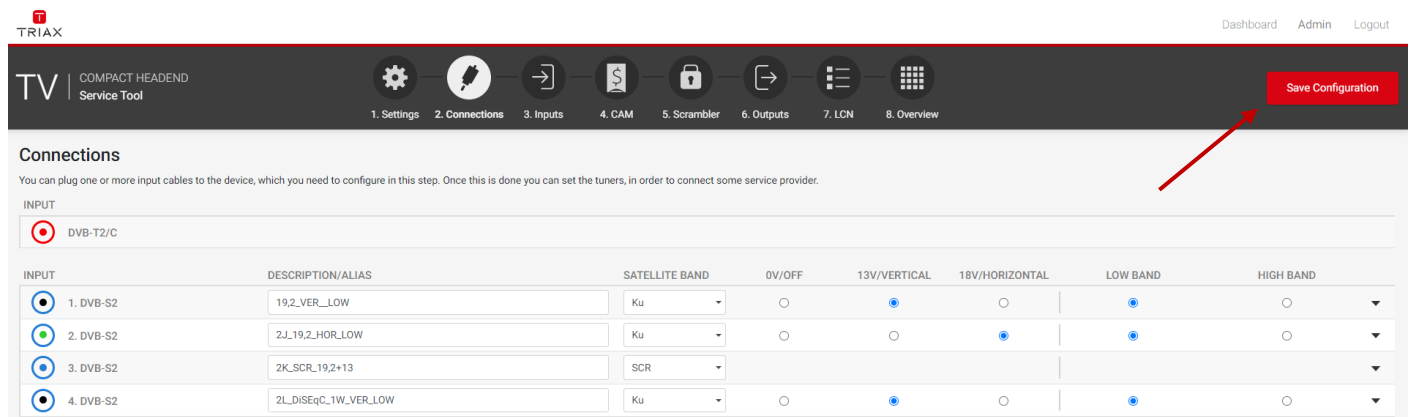

An important button when you change your configuration of the headend system is the “Save Configuration” button placed in the upper right-hand corner of the Service Tool window.

Whenever you have made changes in your configuration, the “Save Configuration” button turns red to tell you that you have unsaved changes that need to be saved.

Click the “Save Configuration” button to save the changes. When changes have been saved, the “Save Configuration” button loses the red colour.

### 5.3.3 Admin options


To enter the Admin options you need to Login.


At the top right you can switch between the Dashboard and the Configuration.

### 5.3.4 Dashboard

There are two possibilities to open the Dashboard overview of a TDcH or TDmH unit.

- When logged in, it is possible to open the Dashboard by pressing the Dashboard in the Administrator menu at the top right corner.
- You can open the Dashboard from the login page at the top right corner.



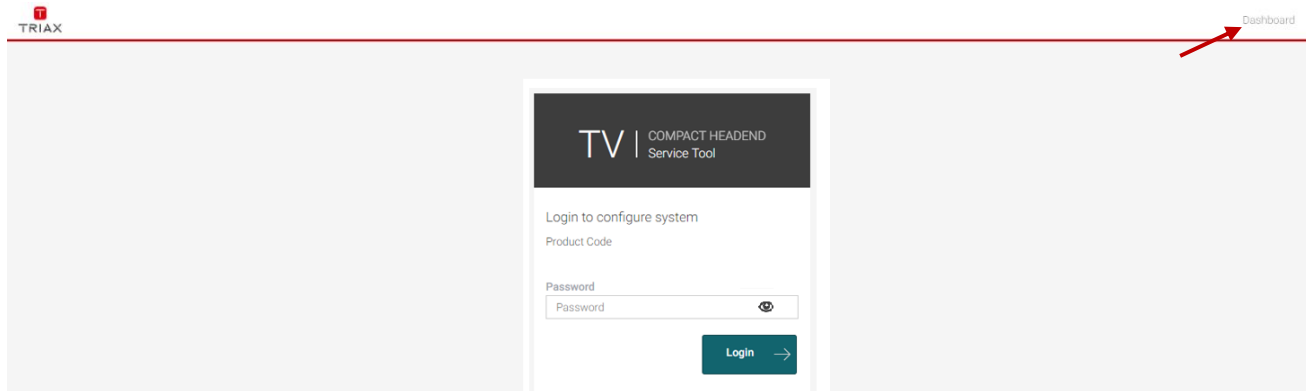


### Note:

For the Dashboard, it is not required to log in and to know the password.

The entered password can be seen if you press the eye.

This Dashboard can be used by hotel employees to see an overview during a failure analysis or report an issue to the installer.

In the Dashboard view you will find the overall TV Status. The window is divided in two sectors. The left side shows all notifications of the last 24 hours and the right side shows a status on TV service level.

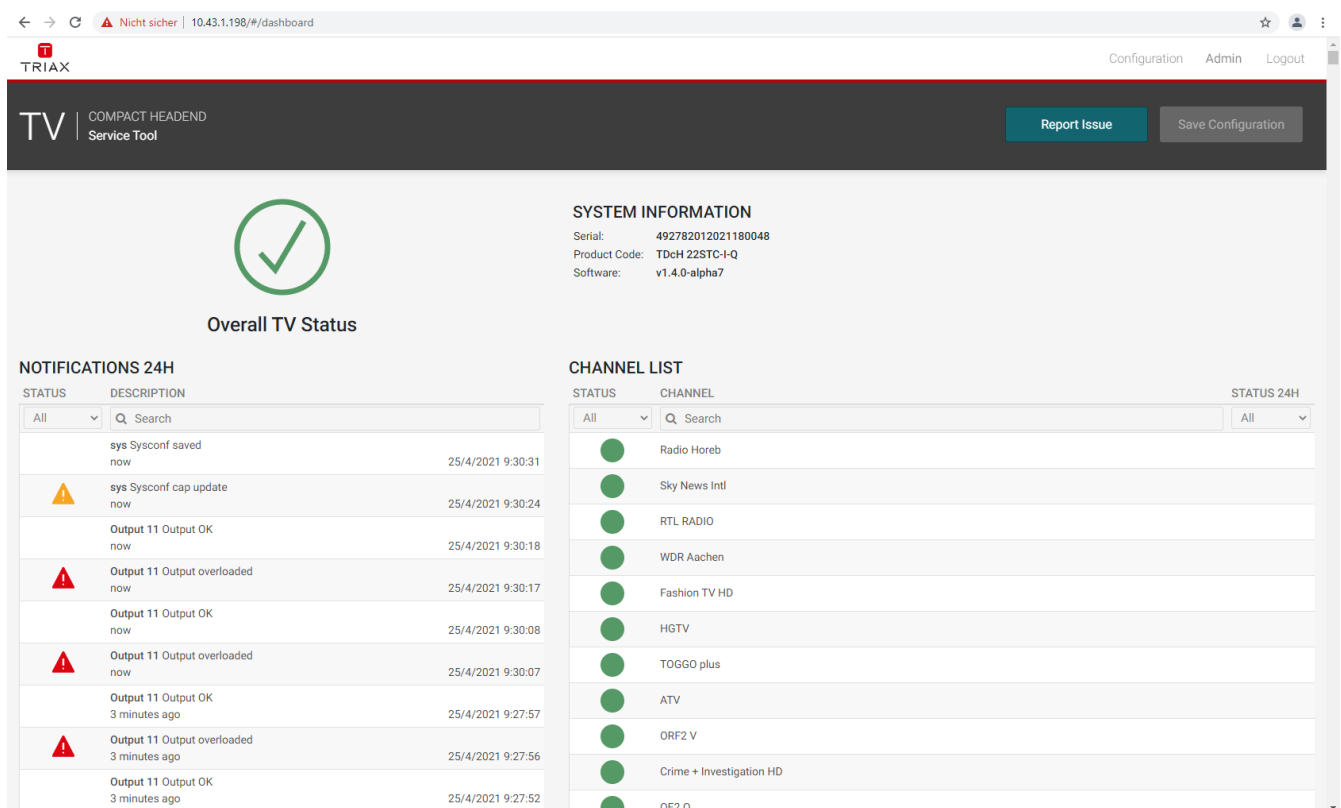

**SYSTEM INFORMATION**

Serial: 492782012021180048  
 Product Code: TDcH 22STC-I-Q  
 Software: v1.4.0-alpha7


**NOTIFICATIONS 24H**

STATUS	DESCRIPTION	TIME
All	Q Search	
	sys Sysconf saved now	25/4/2021 9:30:31
!	sys Sysconf cap update now	25/4/2021 9:30:24
	Output 11 Output OK now	25/4/2021 9:30:18
!	Output 11 Output overloaded now	25/4/2021 9:30:17
	Output 11 Output OK now	25/4/2021 9:30:08
!	Output 11 Output overloaded now	25/4/2021 9:30:07
	Output 11 Output OK 3 minutes ago	25/4/2021 9:27:57
!	Output 11 Output overloaded 3 minutes ago	25/4/2021 9:27:56
	Output 11 Output OK 3 minutes ago	25/4/2021 9:27:52

**CHANNEL LIST**

STATUS	CHANNEL	STATUS 24H
All	Q Search	All
●	Radio Horeb	
●	Sky News Intl	
●	RTL RADIO	
●	WDR Aachen	
●	Fashion TV HD	
●	HGTV	
●	TOGGO plus	
●	ATV	
●	ORF2 V	
●	Crime + Investigation HD	
●	OE2 0	

### 5.3.5 Channel Status Details

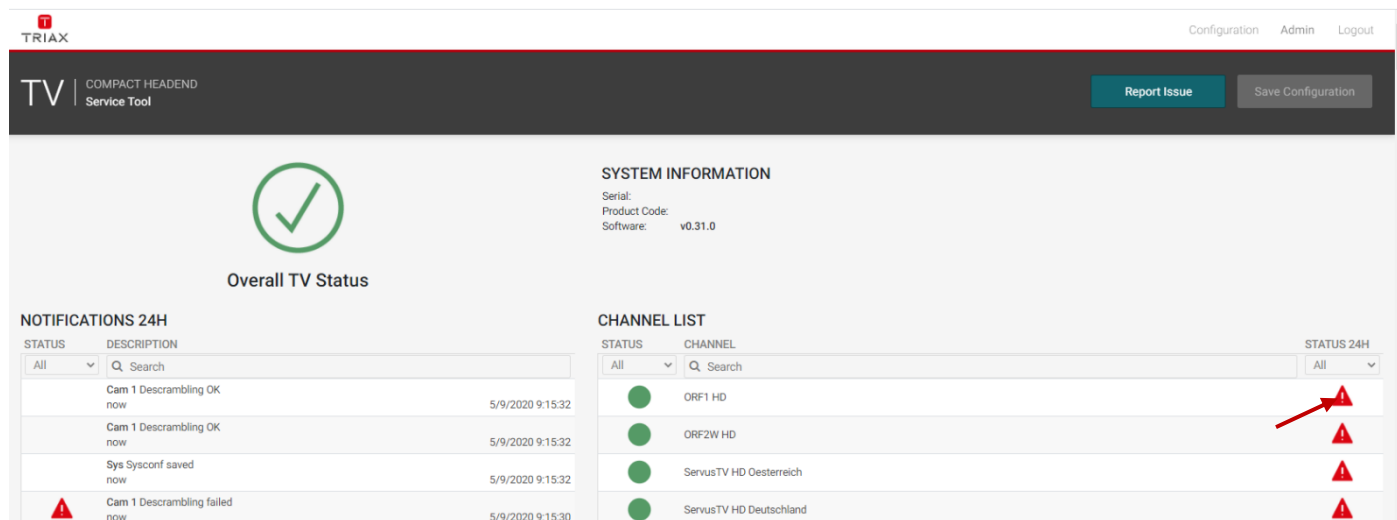


When you are in the Dashboard mode and click on the error indication on the right side, a Channel Status Details window will pop up.

In this window you can find the status over the last 24 hours.


The window also shows where the failure has occurred, such as the tuner, CAM or output.

This also helps to evaluate where the errors took place and the possible reasons for the failure.

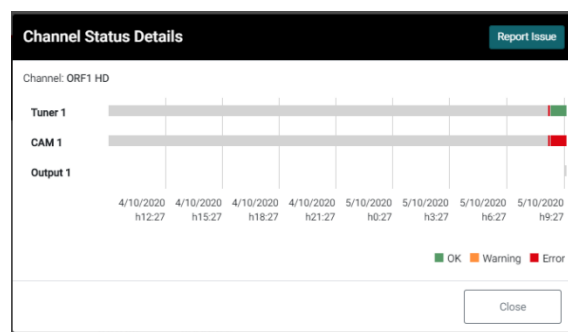


### 5.3.6 Report Issue

By pressing the report issue button, a window opens where you can download the log file. Please send us the log file together with your issue explanation.

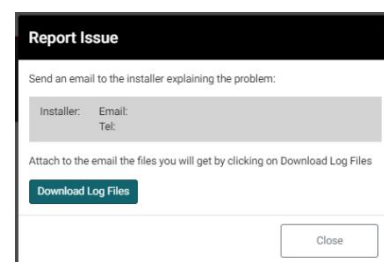

### 5.3.7 Admin menu

In the Admin Menu you have the option to Export the current configuration, import a configuration file, and clear the configuration.



#### Export Configuration

Export the configuration from the TDcH & TDmH system to the download folder on the connected PC.

*Note:*

The configuration file is not human readable!

#### Import Configuration

Import a configuration file from the connected PC to the TDcH & TDmH system.

*Note:*

Configuration files can only be loaded from the same TDcH & TDmH model!

As an example:

- TDcH22STC-I config can be loaded at a TDcH22STC-I system
- TDcH22STC-I config **can NOT** be loaded at a TDcH16S-I

*Note:*

A configuration file from a system with a license required feature activated can be loaded to a system that does not have this feature activated via a license. The system however will show an error message indicating the missing license. There are then two options: a) buy and install the missing license, or b) delete the configuration for the current feature e.g. IPin, IPout, SNMP or Scrambling.

#### Clear Configuration

Clear the configuration at the system.

*Note:*

The function "Clear Configuration" will delete the configuration, set the IP address to the default IP address and also set the password to the default password!

#### Download Log Files

Function to download the log file of the compact headend.

#### Download Equipment File

Function to download the Equipment file of the compact headend.

*Note:*

The Equipment file is needed to generate a license in the PRT tool (Product Registration Tool).


## Licenses

Licenses can be ordered. To order a license the equipment file is needed.

After the order process, the user receives a license file which will have to be loaded to the compact Headend the License was generated for.

*Note:*

The license cannot be used for any other compact headend with a different serial number




## Update Software

It is possible to update the software. The system will automatic reboot after update.

## Reboot


*Note:*

During reboot any unsaved configuration will be lost.

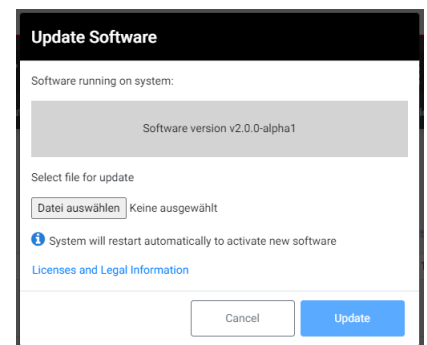

## 5.4 Settings

Start with the folder “Settings” to set up the general settings and information of the TDcH & TDmH headend.

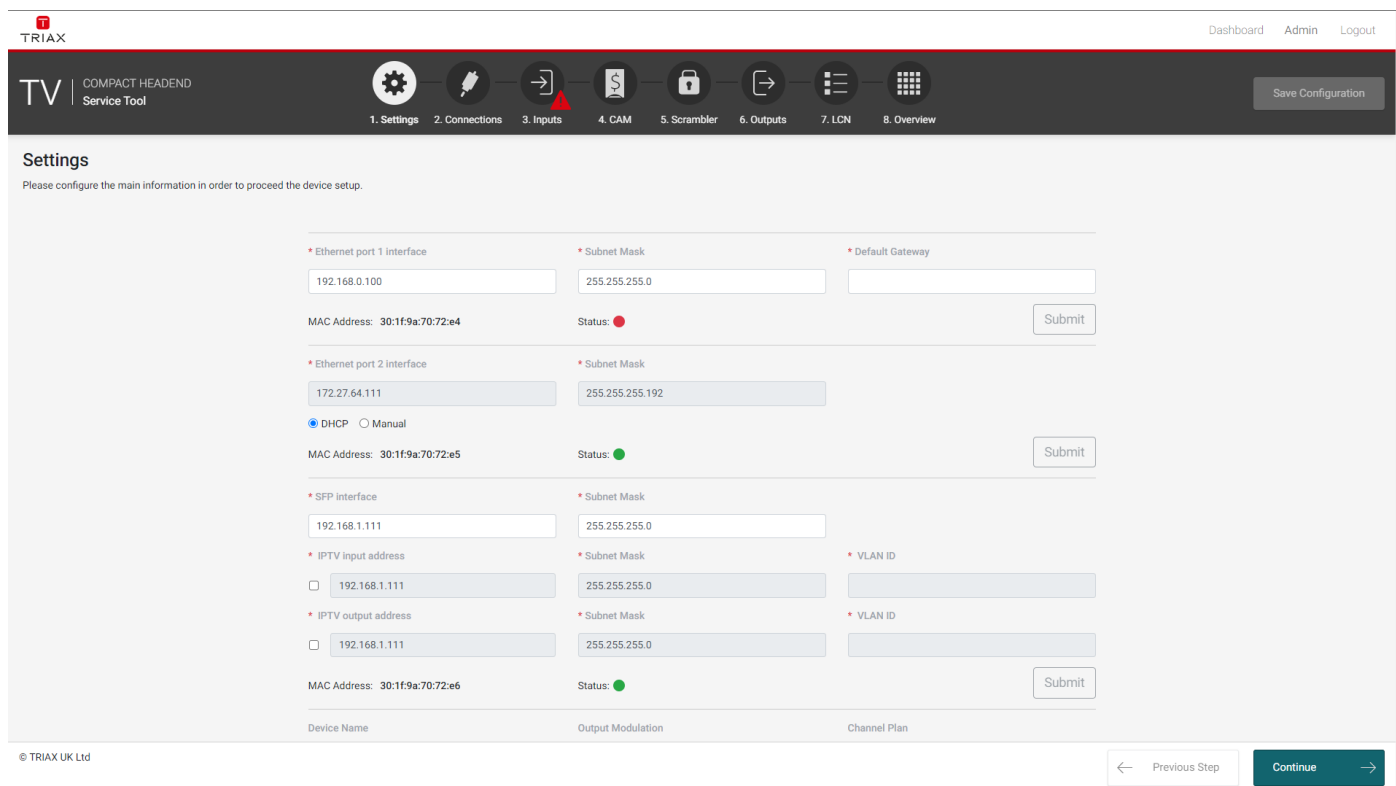

### 5.4.1 Ethernet Port 1 (Management Port)

#### Ethernet port 1 interface

This is the IP address of the Management port (Ethernet 1) of the Headend.

It may be necessary to specify a specific IP addresses for the headend to avoid network IP address conflicts.

#### Note:

If a PC is connected direct to the Management port with an Ethernet cable, the network address of the PC has to be in the same range as the headend.

The TDcH & TDmH management port IP addresses can be reset to factory default settings if required. This is done via the reset button on the headend unit. For more information see “Reset button” section.



#### Subnet Mask

This is the Subnet Mask of the network that the Management Port is connected to.

#### Default Gateway

This is the Default Gateway in the network that the Management Port is connected to.

**MAC Address:**

MAC address of this interface.

**Status:**

Green indicates this interface is connected.

## 5.4.2 System reset

The following reset functions are available:

1. *Factory defaults:*

When the reset button is pressed (during start up) and held until the LED flashes green, then the system resets to factory defaults.

2. *Recovery mode:*

When the reset button is pressed (during start up) and held even longer longer until the LED flashes red, then the system starts in recovery mode. The system can be accessed at Ethernet port 1 at the default IP address.



## 5.4.3 Ethernet port 2

This is the IP address of the Ethernet port 2 of the Headend.



It may be necessary to specify a specific IP address for the headend to avoid network IP address conflicts.

*Note:*

The ethernet Port 2 can be configured with either a static IP address or to dynamically obtain an IP address using DHCP.

**Subnet Mask**

This is the Subnet Mask of the network that the ethernet Port 2 is connected to.

**MAC Address:**

MAC address of this interface.

**Status:**

Green indicates this interface is connected.

## 5.4.4 SFP interface

This is the IP address of the SFP interface of the Headend. This interface is used for IPTV input and output.



**Subnet Mask**

This is the Subnet Mask of the network that the SFP interface is connected to.

**MAC Address:**

MAC address of this interface.

**Status:**

Green indicates that this interface is connected.

Yellow indicates that this interface is connected, but either the interface itself or one of its VLANs are not configured or functioning correctly.

### 5.4.5 VLAN at SFP interface

The SFP interface offers an option for VLANs, where one VLAN can be used for IPTV input and another can be used for IPTV output.

If VLAN is enabled for IPTV input, as in the example shown below, the IPTV input traffic must be tagged with the configured VLAN ID (1111). Streams that are either tagged with a different VLAN or untagged will be ignored. The Headend will also only join (IGMP) any configured multicast streams on the configured VLAN.

If VLAN is not enabled for IPTV input, the input streams must be untagged.


* SFP interface		* Subnet Mask	
<input type="text" value="169.254.1.1"/>		<input type="text" value="255.255.0.0"/>	
* IPTV input address	* Subnet Mask	* VLAN ID	
<input checked="" type="checkbox"/> <input type="text" value="169.254.1.2"/>	<input type="text" value="255.255.0.0"/>	<input type="text" value="1111"/>	
* IPTV output address	* Subnet Mask	* VLAN ID	
<input type="checkbox"/> <input type="text" value="169.254.1.1"/>	<input type="text" value="255.255.0.0"/>	<input type="text"/>	
MAC Address: 30:1f:9a:74:d5:f3		Status: <span style="color: green;">●</span>	
		<input type="button" value="Submit"/>	

If VLAN is enabled for IPTV output, as in the example shown below, the traffic of any configured IPTV output streams will be tagged by the Headend with the configured VLAN ID (2222).

If VLAN is not enabled for IPTV output, the output streams are not VLAN tagged.

* SFP interface		* Subnet Mask	
<input type="text" value="169.254.1.1"/>		<input type="text" value="255.255.0.0"/>	
* IPTV input address	* Subnet Mask	* VLAN ID	
<input checked="" type="checkbox"/> <input type="text" value="169.254.1.2"/>	<input type="text" value="255.255.0.0"/>	<input type="text" value="1111"/>	
* IPTV output address	* Subnet Mask	* VLAN ID	
<input checked="" type="checkbox"/> <input type="text" value="169.254.1.3"/>	<input type="text" value="255.255.0.0"/>	<input type="text" value="2222"/>	
MAC Address: 30:1f:9a:74:d5:f3		Status: <span style="color: green;">●</span>	
		<input type="button" value="Submit"/>	

## 5.4.6 Stacking Mode

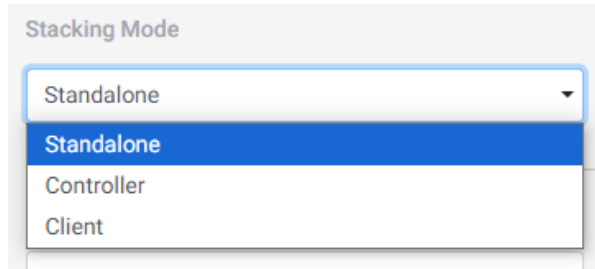

By default the TDcH and TDmH are set to Standalone Mode. This is the legacy mode, where only a single headend unit is deployed. If more units are deployed in a solution, then each unit must be assigned a specific Stacking role. This role is assigned in the Stacking Mode dropdown list. The roles in a stacking solution are:


- *Controller*; The unit where the DVB Network Settings are configured for the complete solution and Client units are selected to be part of the solution.
- *Client*; Up to two units that can be connected to the *Controller*.

Only TDcH units can be assigned the role as *Controller*. Both TDmH and TDcH can be assigned the *Client* role.

The SDT and NIT at all enabled RF outputs (QAM or COFDM) contain information from all units, when more units are connected to each other in a stacking solution.

The units shall be connected to each other via one of the Ethernet ports or the SFP port. It doesn't matter what port that is used. The ports are easily connected directly to each other or via a switch. If a L3 switch is used, then it must be configured to allow multicast and mDNS traffic. The used ports must be configured to unique IP addresses at the same subnet, either manually or by DHCP (only Ethernet port 2).

A Stacking page is added to the menu, if Stacking Mode is different from Standalone.

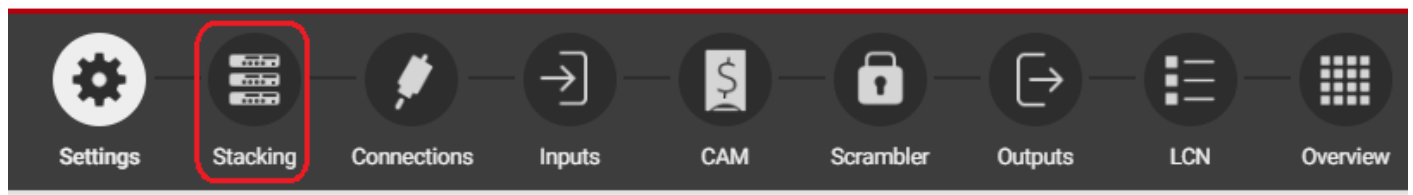

See section 5.5 Stacking for more details about the stacking feature.

### 5.4.7 Device Name

Description field to give the compact Headend or project any name.

### 5.4.8 Output Modulation


The TDcH & TDmH (except TDcH 16S-I-Q and TDcH 16S-Q models) support QAM and COFDM modulation. With this menu it is possible to switch between the QAM and COFDM output modulation.

**It is important to ensure the modulation is set correct before continuing.**

*Note:*

**If the output modulation is changed all configuration will be deleted and a restart is needed!**

A Warning message will be shown.

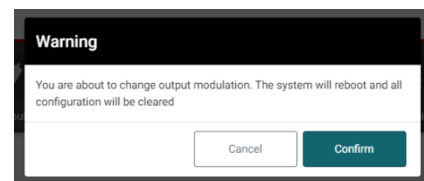

### 5.4.9 Channel Plan

Click on the “Channel Plan” field to open the drop down and select the Channel Plan you would like to use.



**Channel Plan description:**

System B/G		System I		System D/K		System L		System B/G New Zealand	
Name	Centre frequency	Name	Centre frequency	Name	Centre frequency	Name	Centre frequency	Name	Centre frequency
S-21	306,00	S-21	306,00	S-21	306,00	S-21	306,00	CH21	474,00
S-22	314,00	S-22	314,00	S-22	314,00	S-22	314,00	CH22	482,00
S-23	322,00	S-23	322,00	S-23	322,00	S-23	322,00	CH23	490,00
S-24	330,00	S-24	330,00	S-24	330,00	S-24	330,00	CH24	498,00
S-25	338,00	S-25	338,00	S-25	338,00	S-25	338,00	CH25	506,00
S-26	346,00	S-26	346,00	S-26	346,00	S-26	346,00	CH26	514,00
S-27	354,00	S-27	354,00	S-27	354,00	S-27	354,00	CH27	522,00
S-28	362,00	S-28	362,00	S-28	362,00	S-28	362,00	CH28	530,00
S-29	370,00	S-29	370,00	S-29	370,00	S-29	370,00	CH29	538,00
S-30	378,00	S-30	378,00	S-30	378,00	S-30	378,00	CH30	546,00
S-31	386,00	S-31	386,00	S-31	386,00	S-31	386,00	CH31	554,00
S-32	394,00	S-32	394,00	S-32	394,00	S-32	394,00	CH32	562,00
S-33	402,00	S-33	402,00	S-33	402,00	S-33	402,00	CH33	570,00
S-34	410,00	S-34	410,00	S-34	410,00	S-34	410,00	CH34	578,00
S-35	418,00	S-35	418,00	S-35	418,00	S-35	418,00	CH35	586,00
S-36	426,00	S-36	426,00	S-36	426,00	S-36	426,00	CH36	594,00
S-37	434,00	S-37	434,00	S-37	434,00	S-37	434,00	CH37	602,00
S-38	442,00	S-38	442,00	S-38	442,00	S-38	442,00	CH38	610,00
S-39	450,00	S-39	450,00	S-39	450,00	S-39	450,00	CH39	618,00
S-40	458,00	S-40	458,00	S-40	458,00	S-40	458,00	CH40	626,00
S-41	466,00	S-41	466,00	S-41	466,00	S-41	466,00	CH41	634,00
CH21	474,00	CH21	474,00	CH21	474,00	CH21	474,00	CH42	642,00
CH22	482,00	CH22	482,00	CH22	482,00	CH22	482,00	CH43	650,00
CH23	490,00	CH23	490,00	CH23	490,00	CH23	490,00	CH44	658,00
CH24	498,00	CH24	498,00	CH24	498,00	CH24	498,00	CH45	666,00
CH25	506,00	CH25	506,00	CH25	506,00	CH25	506,00	CH46	674,00



System B/G		System I		System D/K		System L		System B/G New Zealand	
Name	Centre frequency	Name	Centre frequency	Name	Centre frequency	Name	Centre frequency	Name	Centre frequency
CH26	514,00	CH26	514,00	CH26	514,00	CH26	514,00	CH47	682,00
CH27	522,00	CH27	522,00	CH27	522,00	CH27	522,00	CH48	690,00
CH28	530,00	CH28	530,00	CH28	530,00	CH28	530,00	CH49	698,00
CH29	538,00	CH29	538,00	CH29	538,00	CH29	538,00	CH50	706,00
CH30	546,00	CH30	546,00	CH30	546,00	CH30	546,00	CH51	714,00
CH31	554,00	CH31	554,00	CH31	554,00	CH31	554,00	CH52	722,00
CH32	562,00	CH32	562,00	CH32	562,00	CH32	562,00	CH53	730,00
CH33	570,00	CH33	570,00	CH33	570,00	CH33	570,00	CH54	738,00
CH34	578,00	CH34	578,00	CH34	578,00	CH34	578,00	CH55	746,00
CH35	586,00	CH35	586,00	CH35	586,00	CH35	586,00	CH56	754,00
CH36	594,00	CH36	594,00	CH36	594,00	CH36	594,00	CH57	762,00
CH37	602,00	CH37	602,00	CH37	602,00	CH37	602,00	CH58	770,00
CH38	610,00	CH38	610,00	CH38	610,00	CH38	610,00	CH59	778,00
CH39	618,00	CH39	618,00	CH39	618,00	CH39	618,00	CH60	786,00
CH40	626,00	CH40	626,00	CH40	626,00	CH40	626,00	CH61	794,00
CH41	634,00	CH41	634,00	CH41	634,00	CH41	634,00	CH62	802,00
CH42	642,00	CH42	642,00	CH42	642,00	CH42	642,00	CH63	810,00
CH43	650,00	CH43	650,00	CH43	650,00	CH43	650,00	CH64	818,00
CH44	658,00	CH44	658,00	CH44	658,00	CH44	658,00	CH65	826,00
CH45	666,00	CH45	666,00	CH45	666,00	CH45	666,00	CH66	834,00
CH46	674,00	CH46	674,00	CH46	674,00	CH46	674,00	CH67	842,00
CH47	682,00	CH47	682,00	CH47	682,00	CH47	682,00	CH68	850,00
CH48	690,00	CH48	690,00	CH48	690,00	CH48	690,00	CH69	858,00
CH49	698,00	CH49	698,00	CH49	698,00	CH49	698,00		
CH50	706,00	CH50	706,00	CH50	706,00	CH50	706,00		
CH51	714,00	CH51	714,00	CH51	714,00	CH51	714,00		
CH52	722,00	CH52	722,00	CH52	722,00	CH52	722,00		
CH53	730,00	CH53	730,00	CH53	730,00	CH53	730,00		
CH54	738,00	CH54	738,00	CH54	738,00	CH54	738,00		
CH55	746,00	CH55	746,00	CH55	746,00	CH55	746,00		
CH56	754,00	CH56	754,00	CH56	754,00	CH56	754,00		
CH57	762,00	CH57	762,00	CH57	762,00	CH57	762,00		
CH58	770,00	CH58	770,00	CH58	770,00	CH58	770,00		
CH59	778,00	CH59	778,00	CH59	778,00	CH59	778,00		
CH60	786,00	CH60	786,00	CH60	786,00	CH60	786,00		
CH61	794,00	CH61	794,00	CH61	794,00	CH61	794,00		
CH62	802,00	CH62	802,00	CH62	802,00	CH62	802,00		
CH63	810,00	CH63	810,00	CH63	810,00	CH63	810,00		
CH64	818,00	CH64	818,00	CH64	818,00	CH64	818,00		
CH65	826,00	CH65	826,00	CH65	826,00	CH65	826,00		
CH66	834,00	CH66	834,00	CH66	834,00	CH66	834,00		
CH67	842,00	CH67	842,00	CH67	842,00	CH67	842,00		
CH68	850,00	CH68	850,00	CH68	850,00	CH68	850,00		
CH69	858,00	CH69	858,00	CH69	858,00	CH69	858,00		
						CH70	866,00		
						CH71	874,00		
						CH72	882,00		

#### 5.4.10 Language

Possibility to change the language of the user interface between English, German and French.


#### 5.4.11 Timezone

Click on the “Timezone” field to open the drop down and select the time zone where the compact headend is installed.

The time zone is important because this sets up the time offset which is added to the UTC time received with the service and sent out in the TOT to the TV.

*Note:*

Please test after the final installation if the time shown on the TV or in the EPG menu of the TV corresponds to the local time.

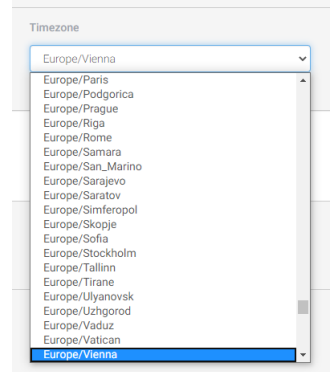

#### 5.4.12 Time / internal clock

The internal clock in the system runs via a RTC. After a power cycle the clock will automatically continue.

The internal clock needs to be synchronized and initialized. If the clock is not synchronized it will drift and e.g. increase with ~ 1 minute pr. 24 hours, resulting in wrong time at the TV sets and EIT mismatch because of not aligned TDT at the output of the TDcH/TDmH.

Clock synchronization is done via a one of following options:

- a) Via NTP (prioritized)
- b) Via TDT in received transport stream

##### **Clock synchronization via NTP**

The NTP time shall be received either at Ethernet port 1 interface or Ethernet port 2 interface. The NTP server is automatically selected from the network configuration information in the DHCP response. If no valid DHCP response information is received, then the system will default to [time1.google.com](http://time1.google.com), [time2.google.com](http://time2.google.com), [time3.google.com](http://time3.google.com), or [time4.google.com](http://time4.google.com).

If the NTP time shall be received via the Ethernet port 1 interface then this port must be connected to the network and a valid and existing “Default gateway” must be configured for this port.

If the NTP time shall be received via the Ethernet port 2 interface then this port must be connected to the network and “DHCP” must be configured for this port.

##### **Clock synchronization via TDT in received transport stream**

The TDT in a received transport stream can also be used to synchronize the clock. The system automatically selects the TDT with the lowest jitter. The received transport stream can be received by any RF input (DVB-S2X or DVB-T2 or DVB-C). From SW v3.1.0 IP inputs are also supported as TDT source for clock synchronization.

#### 5.4.13 Country

Define the country in which the headend is installed.

*Note:*

This setting is also important to have the right time zone settings!

#### 5.4.14 Device Description

Text field for project description and notes.

#### 5.4.15 Installer


Text field for the installer or company name who is responsible for the installation.

#### 5.4.16 Installer Email and Phone

Text field for the email address and phone number of the installer.

**Note:**

Please note that this information is used in the report Issue window which can be accessed from the Dashboard.

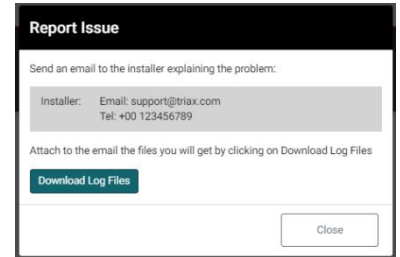

#### 5.4.17 SNMP


Option to enable SNMP and set address port to the SNMP monitor.

#### 5.4.18 Change Password

The first time you login to the headend, you must change the password to a unique password by following these steps:

1. Specify a new password in the “Change Password” field.
2. Re-specify the new password in the “Confirm New Password” field.
3. Press submit to change the password.

### 5.5 Stacking

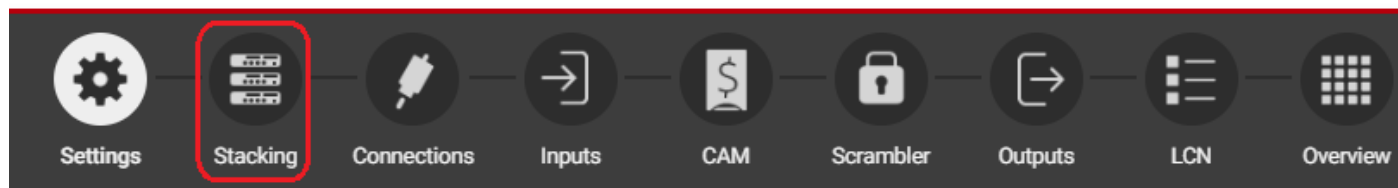


The stacking feature offers:

1. Multiple TDcH/TDmH units in one solution providing NIT and SDT other for the complete stacking solution.
2. Possibility to add up to 3 units. One controller and up to two clients.
  - a. A TDcH unit can have the stacking role as either controller or client.
  - b. A TDmH unit can have the stacking role as client.
3. Units can be connected to each other via either Ethernet 1, Ethernet 2 or SFP port.
  - a. If a L3 switch is used, then shall it be configured to allow multicast and mDNS traffic.

Please read section 5.4.6 Stacking Mode before this section.

The GUI for each unit must be accessed separately. The Stacking page for the controller is shown below.

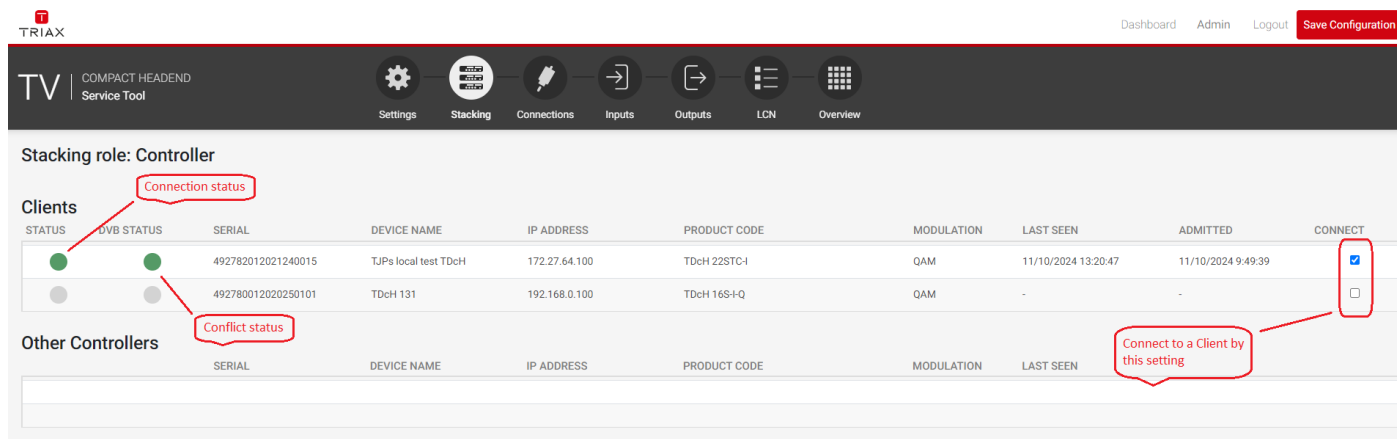

Stacking role: Controller

Clients

STATUS	DVB STATUS	SERIAL	DEVICE NAME	IP ADDRESS	PRODUCT CODE	MODULATION	LAST SEEN	ADMITTED	CONNECT
<span style="color: green;">●</span>	<span style="color: green;">●</span>	492782012021240015	TJPs local test TDcH	172.27.64.100	TDcH 22STC-I	QAM	11/10/2024 13:20:47	11/10/2024 9:49:39	<input checked="" type="checkbox"/>
<span style="color: grey;">●</span>	<span style="color: grey;">●</span>	492780012020250101	TDcH 131	192.168.0.100	TDcH 16S-I-Q	QAM	-	-	<input type="checkbox"/>


Other Controllers

SERIAL	DEVICE NAME	IP ADDRESS	PRODUCT CODE	MODULATION	LAST SEEN

The Controller's Stacking page shows status for clients connected to the controller. It also show unconnected clients, attempting to connect to the controller. A Client can be added to the solution by selecting "Connect" for the given client.

When an added client successfully connects to the controller, its status is shown. First status indicator from the left is a status for connection between the units. The second status indicator is a status for DVB conflicts between the units. The possible conflicts are listed below.

- a) The Output Modulation shall be the same for all units in the stacking solution. See image a.
- b) The LCN and HDLCN shall be unique in the stacking solution. See image b.
- c) The Output frequency and the Output Transport stream ID shall be unique in the stacking solution. See image c.

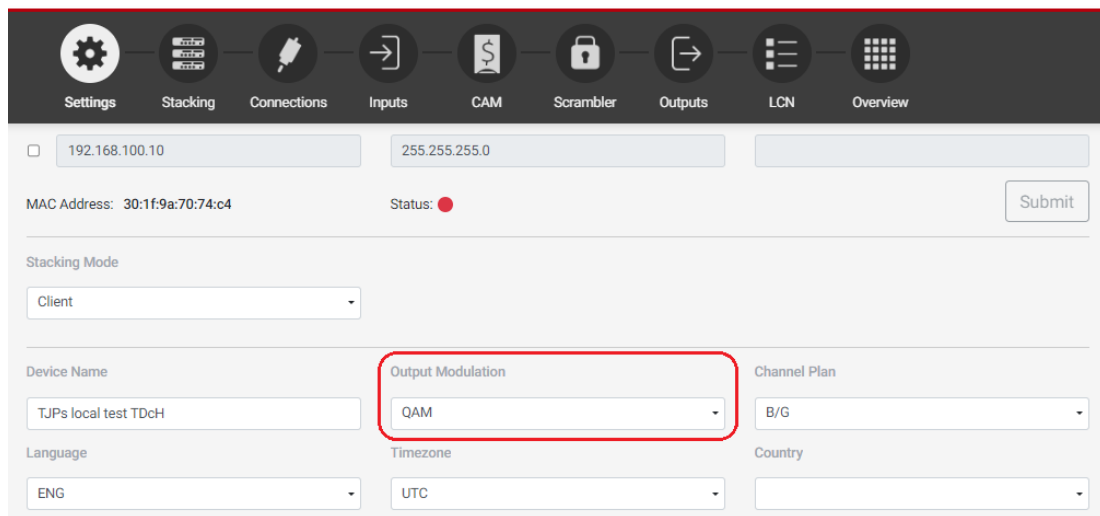

Settings Stacking Connections Inputs CAM Scrambler Outputs LCN Overview

192.168.100.10 255.255.255.0


MAC Address: 30:1f:9a:70:74:c4 Status: ● Submit

Stacking Mode: Client

Device Name: TJP's local test TDcH Output Modulation: QAM Channel Plan: B/G

Language: ENG Timezone: UTC Country:

Image a.

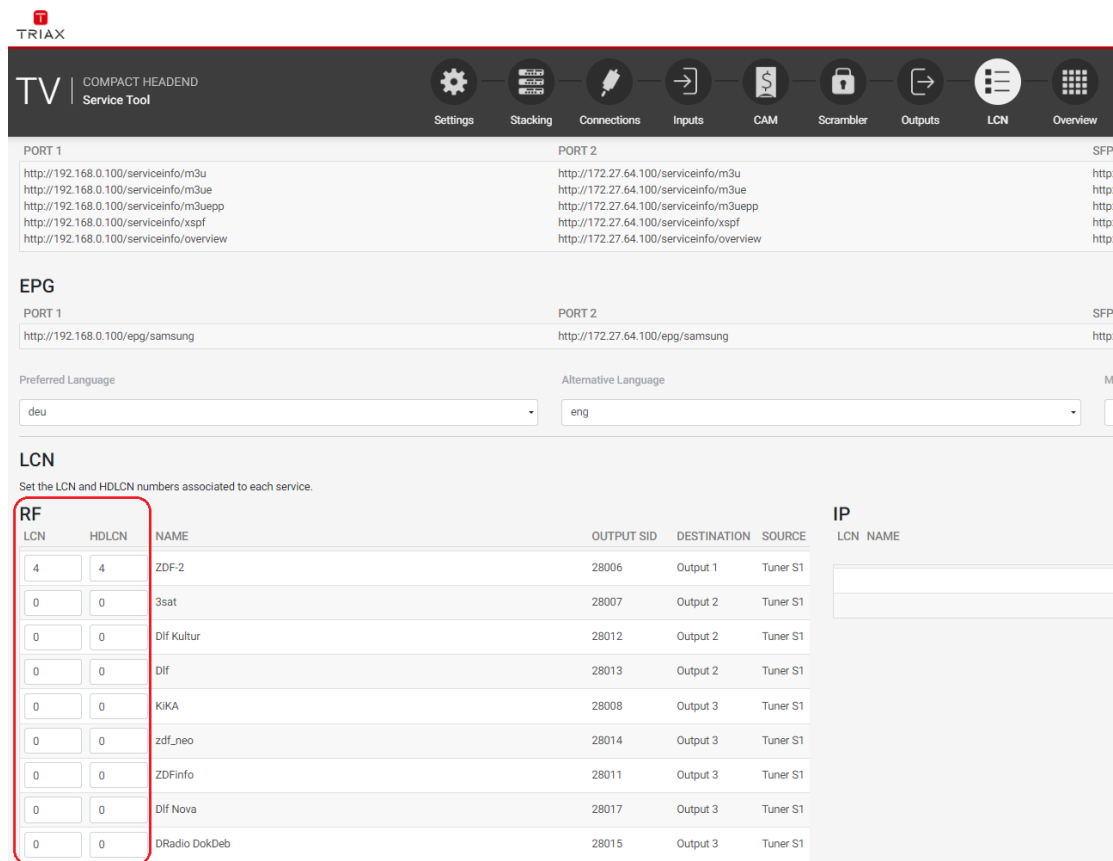

TV COMPACT HEADEND Service Tool

Settings Stacking Connections Inputs CAM Scrambler Outputs LCN Overview

PORT 1 PORT 2 SFP

http://192.168.0.100/serviceinfo/m3u http://172.27.64.100/serviceinfo/m3u http

http://192.168.0.100/serviceinfo/m3ue http://172.27.64.100/serviceinfo/m3ue http

http://192.168.0.100/serviceinfo/m3uepp http://172.27.64.100/serviceinfo/m3uepp http

http://192.168.0.100/serviceinfo/xspf http://172.27.64.100/serviceinfo/xspf http

http://192.168.0.100/serviceinfo/overview http://172.27.64.100/serviceinfo/overview http

EPG

PORT 1 PORT 2 SFP

http://192.168.0.100/epg/samsung http://172.27.64.100/epg/samsung http

Preferred Language: deu Alternative Language: eng

LCN


Set the LCN and HDLCN numbers associated to each service.

LCN	HDLCN	NAME	OUTPUT SID	DESTINATION	SOURCE
4	4	ZDF-2	28006	Output 1	Tuner S1
0	0	3sat	28007	Output 2	Tuner S1
0	0	Dif Kultur	28012	Output 2	Tuner S1
0	0	Dif	28013	Output 2	Tuner S1
0	0	KIKA	28008	Output 3	Tuner S1
0	0	zdf_neo	28014	Output 3	Tuner S1
0	0	ZDFinfo	28011	Output 3	Tuner S1
0	0	Dif Nova	28017	Output 3	Tuner S1
0	0	DRadio DokDeb	28015	Output 3	Tuner S1

IP

LCN NAME

Image b.

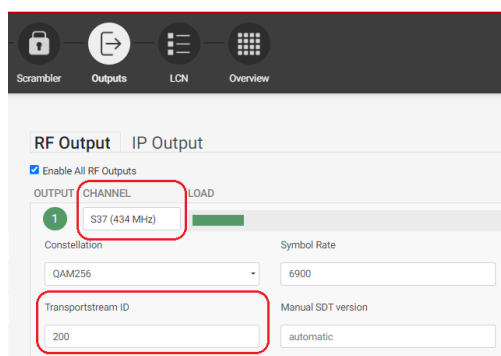

Scrambler Outputs LCN Overview

RF Output IP Output

☒ Enable All RF Outputs

OUTPUT CHANNEL LOAD


1 S37 (434 MHz)

Constellation: QAM256 Symbol Rate: 6900


Transportstream ID: 200 Manual SDT version: automatic

Image c.

A conflict will be indicated in the GUI with a red triangle along with highlighting the affected setting, as shown below for the Transport Stream ID setting at the Output page.

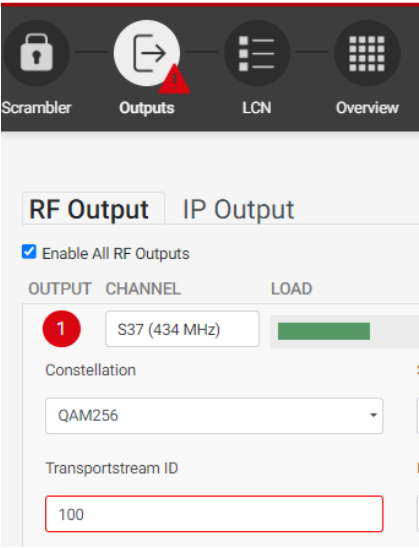

At the client’s Stacking page it is shown what controller the client is connected to, along with status for the connection.

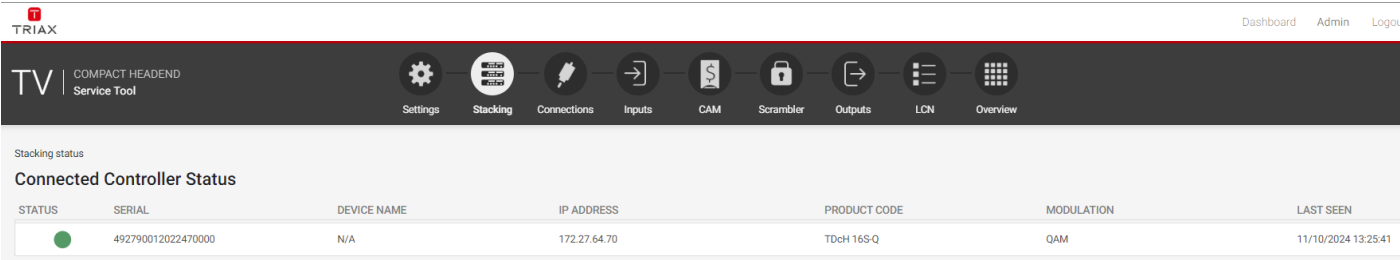

## 5.6 Input connections

### 5.6.1 DVB-T2/C input

The TDcH 22STC-I and TDmH 14STC-I headends have 1 Terrestrial / Cable input marked with DVB-T2/C and a red colour ring.



#### Note:

The Input has an LED indicator.

Black (off) indicates no tuners configured to use this input.

Green indicates OK for all tuners configured to use this input.

Red indicates error for one or more tuners configured to use this input.

### 5.6.2 DVB-S2X inputs

The TDcH & TDmH headend (except the TDmH IP model) has 4 SAT-IF inputs marked with DVB-S2X and a blue colour ring.



#### Note:

The Inputs have an LED indicator.


Black (off) indicates no tuners configured to use this input.


Green indicates OK for all tuners configured to use this input.

Red indicates error for one or more tuners configured to use this input.

### 5.6.3 Connections in GUI

Open the folder “Connections” to set up the DVB-S2X input configuration.


Dashboard Admin Logout


COMPACT HEADEND Service Tool

1. Settings
2. Connections
3. Inputs
4. CAM
5. Scrambler
6. Outputs
7. LCN
8. Overview
Save Configuration

### Connections

You can plug one or more input cables to the device, which you need to configure in this step. Once this is done you can set the tuners, in order to connect some service provider.

INPUT


☒ DVB-T2/C

INPUT	DESCRIPTION/ALIAS	SATELLITE BAND	0V/OFF	13V/VERTICAL	18V/HORIZONTAL	LOW BAND	HIGH BAND
1. DVB-S2	19,2E_VER_LOW	Ku	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
2. DVB-S2	19,2E_HOR_LOW	Ku	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
3. DVB-S2	SCR_19,2E+13E	SCR					
4. DVB-S2	DiSeqC_1W_VER_LOW	Ku	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>

### 5.6.4 Description/Alias

The DVB-S2X inputs can be configured with an alias. This alias is shown in other panes in the GUI, thus it is possible to give the input an alias that describes the source for the input.

E.g. “19,2E\_VER\_LOW” could describe the 19,2° East – Vertical polarisation – Low band.

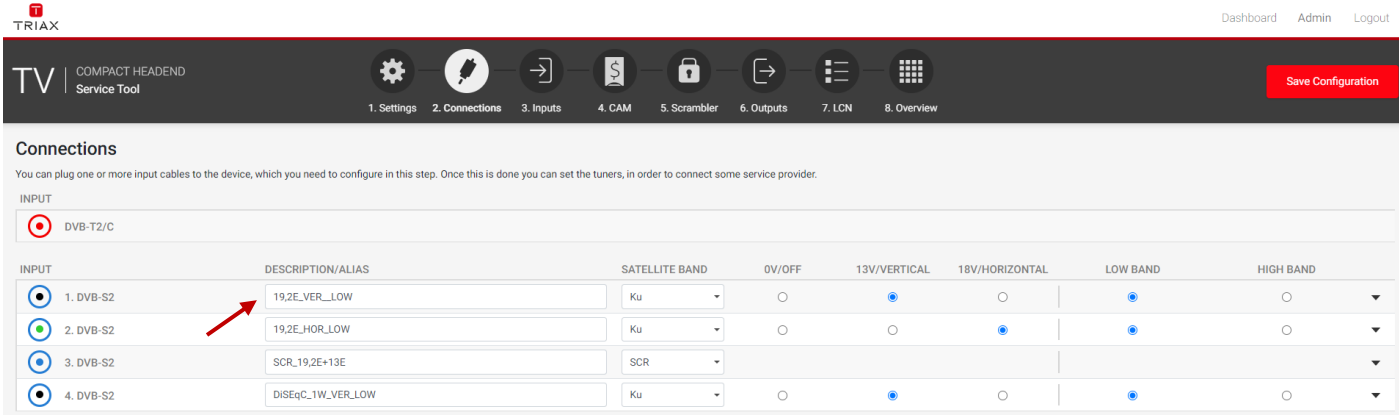

### 5.6.5 Single Satellite Reception

Select the required parameters for each DVB-S2X input:

- Satellite Band      Ku, K, C or SCR (See multi satellite reception)
- 13/18V              for Vertical or Horizontal polarisation
- LOW/HIGH          for the Band

**Note:**

The input colour shows the setting following the same colour codes TRIAX uses on LNBs and multi-switches.

INPUT


	1. DVB-S2
	2. DVB-S2
	3. DVB-S2
	4. DVB-S2

**Yellow:**      Horizontal, High Band

**Red:**        Vertical, High Band

**Green:**      Horizontal, Low Band

**Black:**      Vertical, Low Band

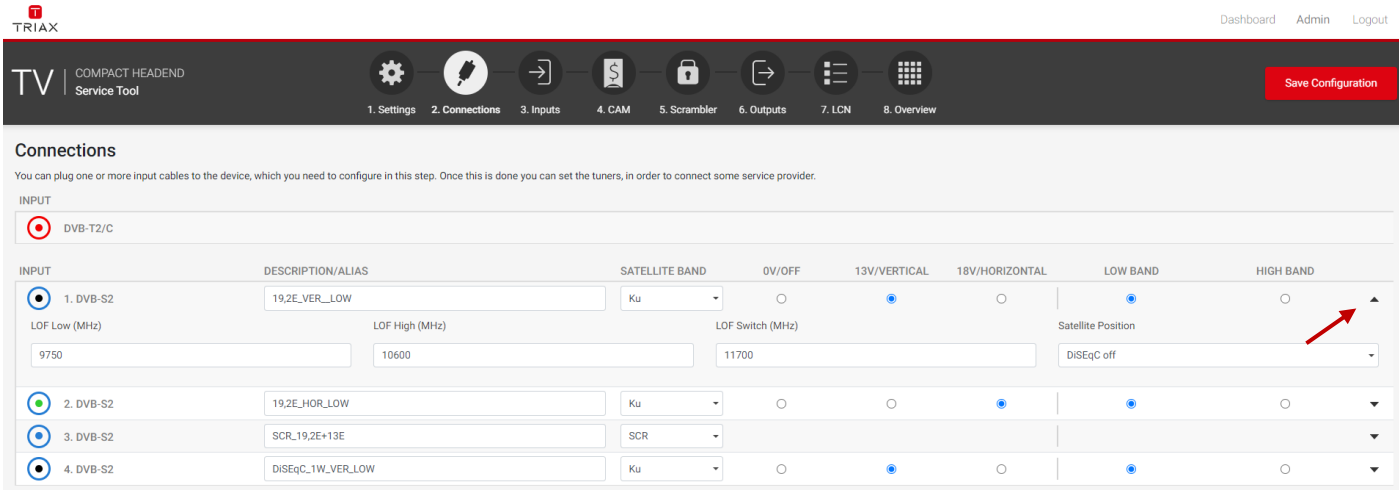

When you press the expand button you can open the DiSEqC settings:

INPUT	DESCRIPTION/ALIAS	SATELLITE BAND	0V/OFF	13V/VERTICAL	18V/HORIZONTAL	LOW BAND	HIGH BAND
1. DVB-S2 LOF Low (MHz) 9750	19,2E_VER_LOW LOF High (MHz) 10600	Ku LOF Switch (MHz) 11700	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
2. DVB-S2	19,2E_HOR_LOW	Ku	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>
3. DVB-S2	SCR_19,2E+13E	SCR	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
4. DVB-S2	DiSEqC_1W_VER_LOW	Ku	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>

Satellite Position  
 DiSEqC off  
 1/A  
 2/B  
 3/C  
 4/D

DiSEqC supports four satellite positions. Please select the desired position if required.

#### Note:

Configure DiSEqC to 1/A, 2/B, 3/C or 4/D will result in DiSEqC commands at the DVB-S2X input describing the position.

Configure DiSEqC to "DiSEqC off" will result in no commands at all, hence no change at the multiswitch. So, changing e.g. 2/B position to "DiSEqC off" will result in the multiswitch still set to 2/B - after a general power failure resulting in both the multiswitch and the TDcH & TDmH power cycling then the multiswitch will start up in default e.g. 1/A resulting in wrong position → no signal at the TDcH & TDmH!

In addition to the DiSEqC settings, the menu also shows the (default) values of the (Local-Oscillator-Frequency)

LOF Low: Local Oscillator Frequency for the low band Frequencies

LOF High: Local Oscillator Frequency for the high band Frequencies

LOF Switch: Border frequency between low and high band

#### Note:

The LOF frequencies can be adjusted to the requirements of the LNB.

## 5.6.6 Multiple satellite reception

To support SCR from the Satellite reception and distribution we recommend to use the following TRIAX products:

### SCR LNB:

304881 TDSS 024 GOLD, 1 SCR out, 24 User bands

This LNB's can be directly connected to one of the TDcH & TdMH DVB-S2X inputs and allows reception of 24 transponders from one satellite independent from the polarization, thus using just one coax cable can support all 16 DVB-S2X inputs in a TDcH/TdMH unit.

### SCR Multi switch:

318185 TdSCR 504, 4 SCR out, 16 User bands each

This multi switch supports 1 satellite position with up to 4 polarizations using 1 Quattro LNB.

Or up to 2 satellite positions with up to 8 polarizations using Wideband LNB's.

16 transponders can be received per coax cable using this switch, thus just one coax cable can support all 16 DVB-S2X inputs in a TDcH/TdMH unit.

318190 TdSCR 906C, 6 SCR out, 10 User bands each

This multi switch supports 2 satellite positions with up to 8 polarizations using 2 Quattro LNB's.

Or up to 4 satellite positions with up to 16 polarizations using Wideband LNB's.

10 transponders can be received per coax cable using this switch.


### Note:

The TDcH & TdMH support the following SCR standards:

- EN50494

- EN50607

If you set the DVB-S2X input to SCR the TDcH & TdMH supports SCR (Satellite Channel Router) functionality and can receive one satellite with up to four polarizations on this input. Each DVB-S2X input can be individually configured.

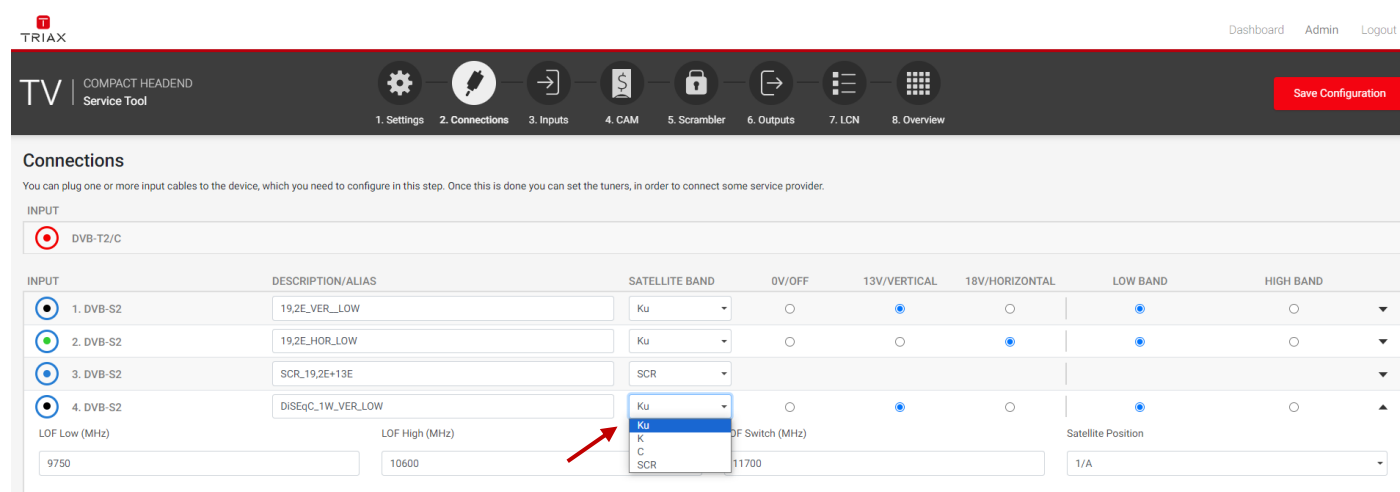

When you press the expand button you can open the SCR and LOF settings:

INPUT	DESCRIPTION/ALIAS	SATELLITE BAND	0V/OFF	13V/VERTICAL	18V/HORIZONTAL	LOW BAND	HIGH BAND
1. DVB-S2	19,2E_VER_LOW	Ku	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
2. DVB-S2	19,2E_HOR_LOW	Ku	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
3. DVB-S2	SCR_19,2E+13E	SCR					
LOF Low (MHz)		LOF High (MHz)		LOF Switch (MHz)			
9750		10600		11700			
Preset 1		Preset 2		Preset 3			
Center Frequencies (MHz)							
UB 1: 1210	UB 9: 1340	UB 17:	UB 25:				
UB 2: 1420	UB 10: 1485	UB 18:	UB 26:				
UB 3: 1680	UB 11: 1550	UB 19:	UB 27:				
UB 4: 2040	UB 12: 1615	UB 20:	UB 28:				
UB 5: 985	UB 13: 1745	UB 21:	UB 29:				
UB 6: 1050	UB 14: 1810	UB 22:	UB 30:				
UB 7: 1115	UB 15: 1875	UB 23:	UB 31:				
UB 8: 1275	UB 16: 1940	UB 24:	UB 32:				
4. DVB-S2	DiSeqC_1W_VER_LOW	Ku	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>

The TDcH & TDmH SCR functionality supports up to 32 User bands per SCR input. The centre frequencies can be entered on the table as shown in the screen shot.

The Frequencies the SCR distribution equipment supports can be found on the product label or in the user manual of the used product.

In addition to the SCR user band settings, the menu also shows the (default) values of the (Local-Oscillator-Frequency)

LOF Low: Local Oscillator Frequency for the low band Frequencies

LOF High: Local Oscillator Frequency for the high band Frequencies


LOF Switch: Border frequency between low and high band

#### Note:

The LOF frequencies can be adjusted to the requirements of the used LNB. Starting a new configuration the LOF frequencies are set to the default values.

### 5.7 RF inputs

Click the “Inputs” folder in the Compact Headend Service Tool to display the RF Inputs window.

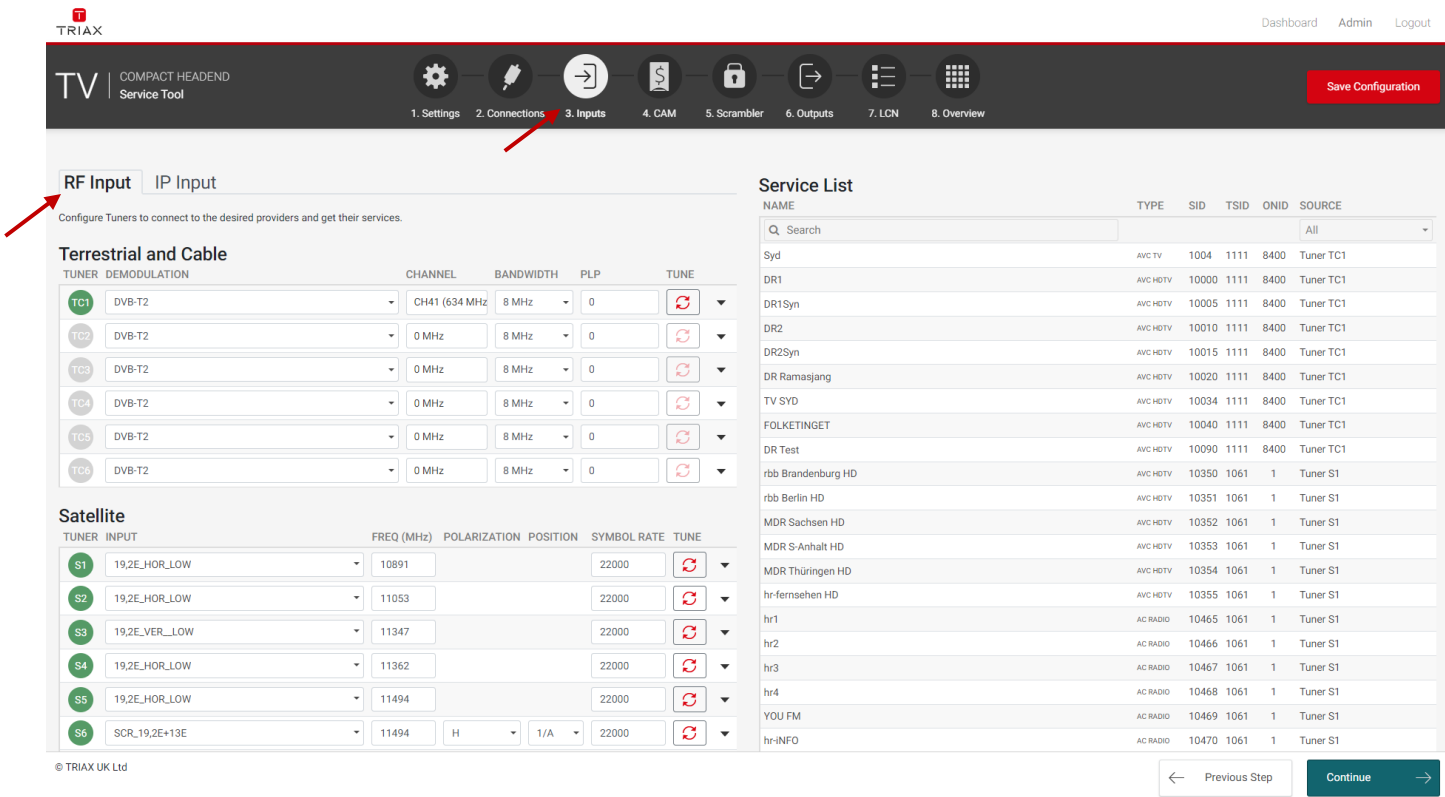


The “Inputs” page shows all RF input tuners. The colour of the tuner number shows the status of each tuner.


Grey: Tuner is not used

Red: Tuner is not set up correctly or input signal is missing.

Green: Tuner is locked and working.

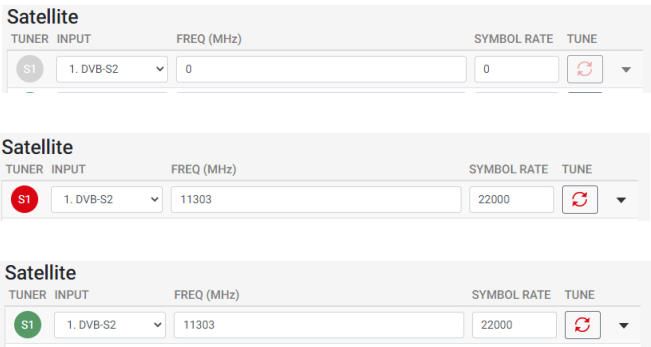

The first time the Compact Headend Service Tool displays the tuner configuration window in a new configuration, the configuration fields and the list of services will be empty or display default values.



COMPACT HEADEND  
Service Tool

1. Settings

2. Connections

3. Inputs

4. CAM

5. Outputs

6. LCN

7. Overview

[Dashboard](#)
[Admin](#)
[Logout](#)

[Save Configuration](#)

---

Configure Tuners to connect to the desired providers and get their services.

### Tuners

TUNER	INPUT	FREQ (MHZ)	SYMBOL RATE	TUNE
1	Input 1	0	0	
2	Input 1	0	0	
3	Input 1	0	0	
4	Input 1	0	0	
5	Input 1	0	0	
6	Input 1	0	0	
7	Input 1	0	0	
8	Input 1	0	0	
9	Input 1	0	0	
10	Input 1	0	0	
11	Input 1	0	0	
12	Input 1	0	0	
13	Input 1	0	0	
14	Input 1	0	0	
15	Input 1	0	0	
16	Input 1	0	0	

### Service List

NAME	TYPE	SID	TSID	ONID	SOURCE
Q Search					All

© TRIAX A/S

[< Previous Step](#)
[Continue >](#)

### 5.7.1 Terrestrial and Cable tuner setup

**Note:**

This functionality is only available on the Version TDcH 22STC-I and TDmH 14STC-I.

To set up a tuner you must follow the following steps:

1. Select the “Demodulation”:

#### Terrestrial and Cable

TUNER	DEMODULATION	CHANNEL	BANDWIDTH	PLP	SYMBOL RATE	TUNE
TC1	DVB-T2	CH41 (634 MHz)	8 MHz	0		
TC2	DVB-T2	0 MHz	8 MHz	0		
TC3	DVB-T2	0 MHz	8 MHz	0		
TC4	DVB-T2	0 MHz	8 MHz	0		
TC5	DVB-C	0 MHz			6900	
TC6	DVB-C	0 MHz			6900	

To select the required demodulation, click on the demodulation field to open the drop-down list with demodulations you can choose from.

Select the demodulation you want to use.

- Enter the desired frequency in MHz in the channel field or select the corresponding channel from the dropdown list:

**Terrestrial and Cable**

TUNER	DEMODULATION	CHANNEL	BANDWIDTH	PLP	SYMBOL RATE	TUNE
TC1	DVB-C	308 MHz			6900	
TC2	DVB-C	S21 (306 MHz) S22 (314 MHz)			6900	
TC3	DVB-C	S23 (322 MHz) S24 (330 MHz)			6900	
TC4	DVB-C	S25 (338 MHz) S26 (346 MHz)			6900	
TC5	DVB-C	S27 (354 MHz) S28 (362 MHz)			0	
TC6	DVB-C	S29 (370 MHz) 0 MHz			0	

- If the tuner is used as DVB-T/T2 then please select the required channel bandwidth and PLP number:

**Terrestrial and Cable**

TUNER	DEMODULATION	CHANNEL	BANDWIDTH	PLP	SYMBOL RATE	TUNE
TC1	DVB-C	308 MHz			6900	
TC2	DVB-C	S22 (314 MHz)			6900	
TC3	DVB-C	S23 (322 MHz)			6900	
TC4	DVB-C	S24 (330 MHz)			6900	
TC5	DVB-T2	0 MHz	8 MHz	0		
TC6	DVB-T2	0 MHz	8 MHz	0		

- If the tuner is used as DVB-C then please select the required symbol rate:

**Terrestrial and Cable**


TUNER	DEMODULATION	CHANNEL	BANDWIDTH	PLP	SYMBOL RATE	TUNE
TC1	DVB-C	308 MHz			6900	
TC2	DVB-C	S22 (314 MHz)			6900	
TC3	DVB-C	S23 (322 MHz)			6900	
TC4	DVB-C	S24 (330 MHz)			6900	
TC5	DVB-T2	0 MHz	8 MHz	0		
TC6	DVB-T2	0 MHz	8 MHz	0		







- If an alternative EIT to the internal EIT in the current transport stream, press expand for the tuner and choose the alternative EIT source:

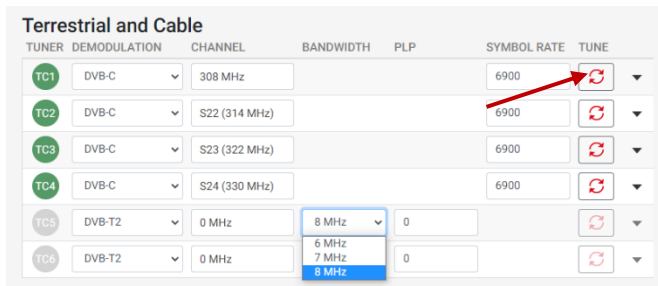**Terrestrial and Cable**


TUNER	DEMODULATION	CHANNEL	BANDWIDTH	PLP	SYMBOL RATE	TUNE
TC1	DVB-T2	CH41 (634 MHz)	8 MHz	0		
<p>Carrier Noise Ratio: 34.8 dB      Standard: DVB-T2</p> <p>Signal Level: 46 dBuV      Modulation: 256-QAM</p> <p>Status: Locked</p> <p>EIT source: Use internal EIT</p> <p>Delete ✕</p>						
TC2	DVB-T2	0 MHz	8 MHz	0		
TC3	DVB-T2	0 MHz	8 MHz	0		
TC4	DVB-T2	0 MHz	8 MHz	0		
TC5	DVB-C	0 MHz			6900	
TC6	DVB-C	0 MHz			6900	







6. Click the “TUNE” button to activate the setting into the headend system:

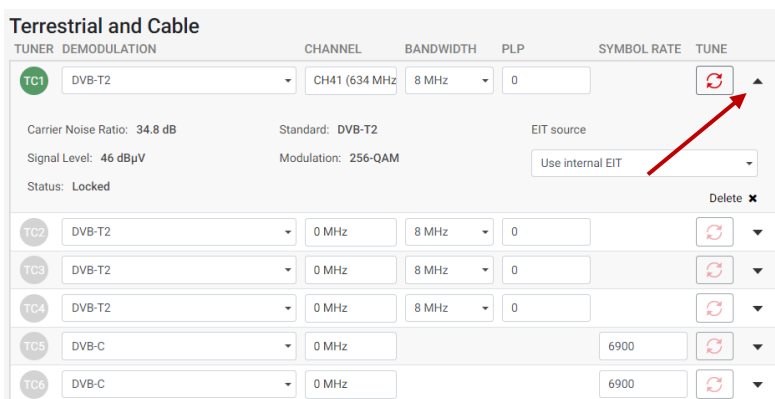

TUNER	DEMODULATION	CHANNEL	BANDWIDTH	PLP	SYMBOL RATE	TUNE
TC1	DVB-C	308 MHz			6900	
TC2	DVB-C	S22 (314 MHz)			6900	
TC3	DVB-C	S23 (322 MHz)			6900	
TC4	DVB-C	S24 (330 MHz)			6900	
TC5	DVB-T2	0 MHz	8 MHz	0		
TC6	DVB-T2	0 MHz	8 MHz	0		

By clicking on the expand button, information details from the selected transponder will be shown:



TUNER	DEMODULATION	CHANNEL	BANDWIDTH	PLP	SYMBOL RATE	TUNE
TC1	DVB-T2	CH41 (634 MHz)	8 MHz	0		
Carrier Noise Ratio: 34.8 dB Signal Level: 46 dBµV Status: Locked Standard: DVB-T2 Modulation: 256-QAM EIT source: Use internal EIT						
TC2	DVB-T2	0 MHz	8 MHz	0		
TC3	DVB-T2	0 MHz	8 MHz	0		
TC4	DVB-T2	0 MHz	8 MHz	0		
TC5	DVB-C	0 MHz			6900	
TC6	DVB-C	0 MHz			6900	

Carrier Noise Ratio: Shows the carrier to noise ratio of the input signal

Signal Level: Displays the actual signal level







Standard: Shows the standard of the input signal

Modulation: Shows the modulation of the input signal

Status: Shows the status of the tuner

To delete the tuner input, press the “Delete x”:

**Terrestrial and Cable**

TUNER	DEMODULATION	CHANNEL	BANDWIDTH	PLP	SYMBOL RATE	TUNE
TC1	DVB-T2	CH41 (634 MHz)	8 MHz	0		 ▲
Carrier Noise Ratio: 34.8 dB      Standard: DVB-T2      EIT source Signal Level: 46 dBμV      Modulation: 256-QAM      Use internal EIT Status: Locked						
TC2	DVB-T2	0 MHz	8 MHz	0		 ▼
TC3	DVB-T2	0 MHz	8 MHz	0		 ▼
TC4	DVB-T2	0 MHz	8 MHz	0		 ▼
TC5	DVB-C	0 MHz			6900	 ▼
TC6	DVB-C	0 MHz			6900	 ▼

Delete x

A warning will appear:

**Warning**

When deleting Tuner configuration, the associated services will be removed from the Service Pool and all the related configuration will be deleted.


Cancel
Confirm

Service List

## 5.7.2 Satellite tuner setup

To set up a satellite tuner you must follow the following steps:

1. Select the “Input”:

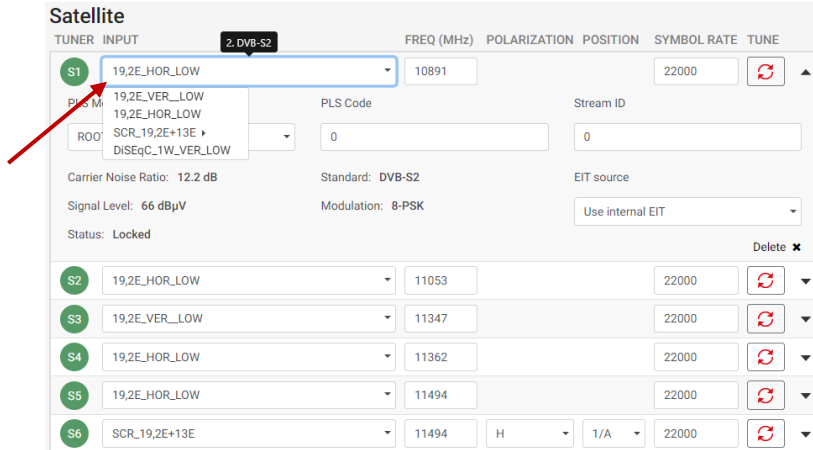

**Satellite**

TUNER	INPUT	FREQ (MHz)	POLARIZATION	POSITION	SYMBOL RATE	TUNE
S1	19,2E_HOR_LOW	10891			22000	[Refresh] [Up]
S2	19,2E_HOR_LOW	11053			22000	[Refresh] [Down]
S3	19,2E_VER_LOW	11347			22000	[Refresh] [Down]
S4	19,2E_HOR_LOW	11362			22000	[Refresh] [Down]
S5	19,2E_HOR_LOW	11494			22000	[Refresh] [Down]
S6	SCR_19,2E+13E	11494	H	1/A	22000	[Refresh] [Down]

Carrier Noise Ratio: 12.2 dB  
Signal Level: 66 dBμV  
Status: Locked


Standard: DVB-S2  
Modulation: 8-PSK

EIT source: Use internal EIT

To select the required input / SAT-IF signal, click on the input field to open the drop-down list with the inputs you can choose from.

Select the input you want to use.

2. Enter the desired frequency in MHz in the frequency field:

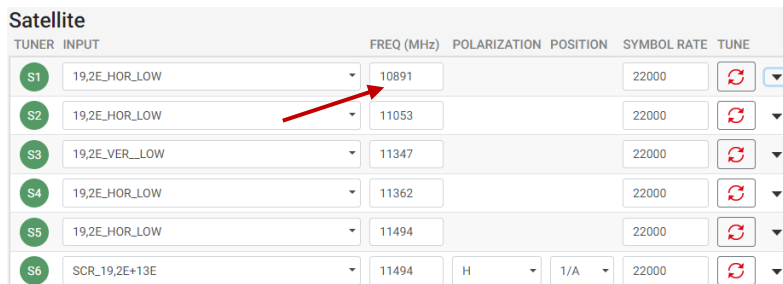

**Satellite**

TUNER	INPUT	FREQ (MHz)	POLARIZATION	POSITION	SYMBOL RATE	TUNE
S1	19,2E_HOR_LOW	10891			22000	[Refresh] [Up]
S2	19,2E_HOR_LOW	11053			22000	[Refresh] [Down]
S3	19,2E_VER_LOW	11347			22000	[Refresh] [Down]
S4	19,2E_HOR_LOW	11362			22000	[Refresh] [Down]
S5	19,2E_HOR_LOW	11494			22000	[Refresh] [Down]
S6	SCR_19,2E+13E	11494	H	1/A	22000	[Refresh] [Down]

3. Enter the desired symbol rate:










**Satellite**

TUNER	INPUT	FREQ (MHz)	POLARIZATION	POSITION	SYMBOL RATE	TUNE
S1	19,2E_HOR_LOW	10891			22000	[Refresh] [Up]
S2	19,2E_HOR_LOW	11053			22000	[Refresh] [Down]
S3	19,2E_VER_LOW	11347			22000	[Refresh] [Down]
S4	19,2E_HOR_LOW	11362			22000	[Refresh] [Down]
S5	19,2E_HOR_LOW	11494			22000	[Refresh] [Down]
S6	SCR_19,2E+13E	11494	H	1/A	22000	[Refresh] [Down]










4. If the input source is DVB-S2X Multistream, expand the tuner settings and enter the PLS Mode, PLS Code and Stream ID.

**Satellite**

TUNER	INPUT	FREQ (MHz)	POLARIZATION	POSITION	SYMBOL RATE	TUNE
S1	19,2E_HOR_LOW	10891			22000	 
<div> <div>PLS Mode</div> <div>PLS Code</div> <div>Stream ID</div> </div> <div> <div>ROOT</div> <div>0</div> <div>0</div> </div> <div> <div>Carrier Noise Ratio: 12.4 dB</div> <div>Standard: DVB-S2</div> <div>EIT source</div> </div> <div> <div>Signal Level: 67 dBμV</div> <div>Modulation: 8-PSK</div> <div>Use internal EIT</div> </div> <div>Status: Locked</div> <div>Delete ✕</div>						
S2	19,2E_HOR_LOW	11053			22000	 ▼
S3	19,2E_VER_LOW	11347			22000	 ▼
S4	19,2E_HOR_LOW	11362			22000	 ▼
S5	19,2E_HOR_LOW	11494			22000	 ▼
S6	SCR_19,2E+13E	11494	H	1/A	22000	 ▼

5. If the input source is SCR (Satellite Channel Router)








**Satellite**

TUNER	INPUT	FREQ (MHz)	POLARIZATION	POSITION	SYMBOL RATE	TUNE
S1	19,2E_HOR_LOW	10891			22000	 ▼
S2	19,2E_HOR_LOW	11053			22000	 ▼
S3	19,2E_VER_LOW	11347			22000	 ▼
S4	19,2E_HOR_LOW	11362			22000	 ▼
S5	19,2E_HOR_LOW	11494			22000	 ▼
S6	SCR_19,2E+13E	11494	H	1/A	22000	 ▲
<div> <div>PLS Mode</div> <div>PLS Code</div> <div>Stream ID</div> </div> <div> <div>19,2E_HOR_LOW</div> <div>19,2E_HOR_LOW</div> <div>0</div> </div> <div> <div>Carrier Noise Ratio: 16.0 dB</div> <div>Standard: DVB-S2</div> <div>EIT source</div> </div> <div> <div>Signal Level: 74 dBμV</div> <div>Modulation: 8-PSK</div> <div>Use internal EIT</div> </div> <div>Status: Locked</div> <div>Delete ✕</div>						
S7	SCR_19,2E+13E	11566	H	2/B	29900	 ▼
S8	SCR_19,2E+13E	11766	V	2/B	29900	 ▼
S9	SCR_19,2E+13E	12399	H	2/B	29700	 ▼

You must select the SCR user band and the Polarisation and Satellite position.






- If an alternative EIT to the internal EIT in the current transport stream, press expand for the tuner and choose the alternative EIT source:

**Satellite**

TUNER	INPUT	FREQ (MHz)	POLARIZATION	POSITION	SYMBOL RATE	TUNE
S1	19,2E_HOR_LOW	10891			22000	 
<div> <div>PLS Mode</div> <div>PLS Code</div> <div>Stream ID</div> </div> <div> <div>ROOT</div> <div>0</div> <div>0</div> </div>						
<div> <div>Carrier Noise Ratio: 12.4 dB</div> <div>Standard: DVB-S2</div> <div>EIT source</div> </div> <div> <div>Signal Level: 67 dBμV</div> <div>Modulation: 8-PSK</div> <div>Use internal EIT</div> </div>						
Status: Locked <span>Delete x</span>						
S2	19,2E_HOR_LOW	11053			22000	 ▼
S3	19,2E_VER_LOW	11347			22000	 ▼
S4	19,2E_HOR_LOW	11362			22000	 ▼
S5	19,2E_HOR_LOW	11494			22000	 ▼
S6	SCR_19,2E+13E	11494	H	1/A	22000	 ▼

- Click the “TUNE” button to activate the setting into the headend system:

**Satellite**

TUNER	INPUT	FREQ (MHz)	SYMBOL RATE	TUNE
S1	1. DVB-S2	11303	22000	 ▼
S2	1. DVB-S2	11273	22000	 ▼
S3	1. DVB-S2	11244	22000	 ▼
S4	2. DVB-S2	12304	27500	 ▼
S5	1. DVB-S2	11494	22000	 ▼

By clicking on the expand button, information details from the selected transponder will be shown:

Satellite

TUNER INPUT

FREQ (MHz) POLARIZATION POSITION SYMBOL RATE TUNE

S1

19,2E\_HOR\_LOW

10891

22000

PLS Mode

PLS Code

Stream ID

ROOT

0

0

Carrier Noise Ratio: 12.4 dB

Standard: DVB-S2

EIT source

Signal Level: 67 dBµV

Modulation: 8-PSK

Use internal EIT

Status: Locked

Delete x

S2

19,2E\_HOR\_LOW

11053

22000

S3

19,2E\_VER\_LOW

11347

22000

S4

19,2E\_HOR\_LOW

11362

22000

S5

19,2E\_HOR\_LOW

11494

22000

S6

SCR\_19,2E+13E

11494

H

1/A

22000

- Carrier Noise Ratio:

Shows the carrier to noise ratio of the input signal
- Signal Level:

Displays the actual signal level
- Standard:

Shows the standard of the input signal
- Modulation:

Shows the modulation of the input signal
- Status:

Shows the status of the tuner

To delete the tuner input, press the “Delete x”:

### Satellite

TUNER	INPUT	FREQ (MHz)	POLARIZATION	POSITION	SYMBOL RATE	TUNE
S1	19,2E_HOR_LOW	10891			22000	
<div> <div>PLS Mode</div> <div>ROOT</div> </div> <div> <div>PLS Code</div> <div>0</div> </div> <div> <div>Stream ID</div> <div>0</div> </div>						
<div> <div>Carrier Noise Ratio: 12.4 dB</div> <div>Standard: DVB-S2</div> <div>EIT source</div> </div> <div> <div>Signal Level: 67 dBμV</div> <div>Modulation: 8-PSK</div> <div>Use internal EIT</div> </div> <div>Status: Locked</div>						
Delete x						
S2	19,2E_HOR_LOW	11053			22000	▼
S3	19,2E_VER_LOW	11347			22000	▼
S4	19,2E_HOR_LOW	11362			22000	▼
S5	19,2E_HOR_LOW	11494			22000	▼
S6	SCR_19,2E+13E	11494	H	1/A	22000	▼

A warning will appear:

Warning

When deleting Tuner configuration, the associated services will be removed from the Service Pool and all the related configuration will be deleted.

Cancel

Confirm


Service List

### 5.7.3 Service List

In the Source field, select the tuner number to see available streams with name, type, SID, TSID and ONID:

First Click → sort rising

Second click at same type → sort falling

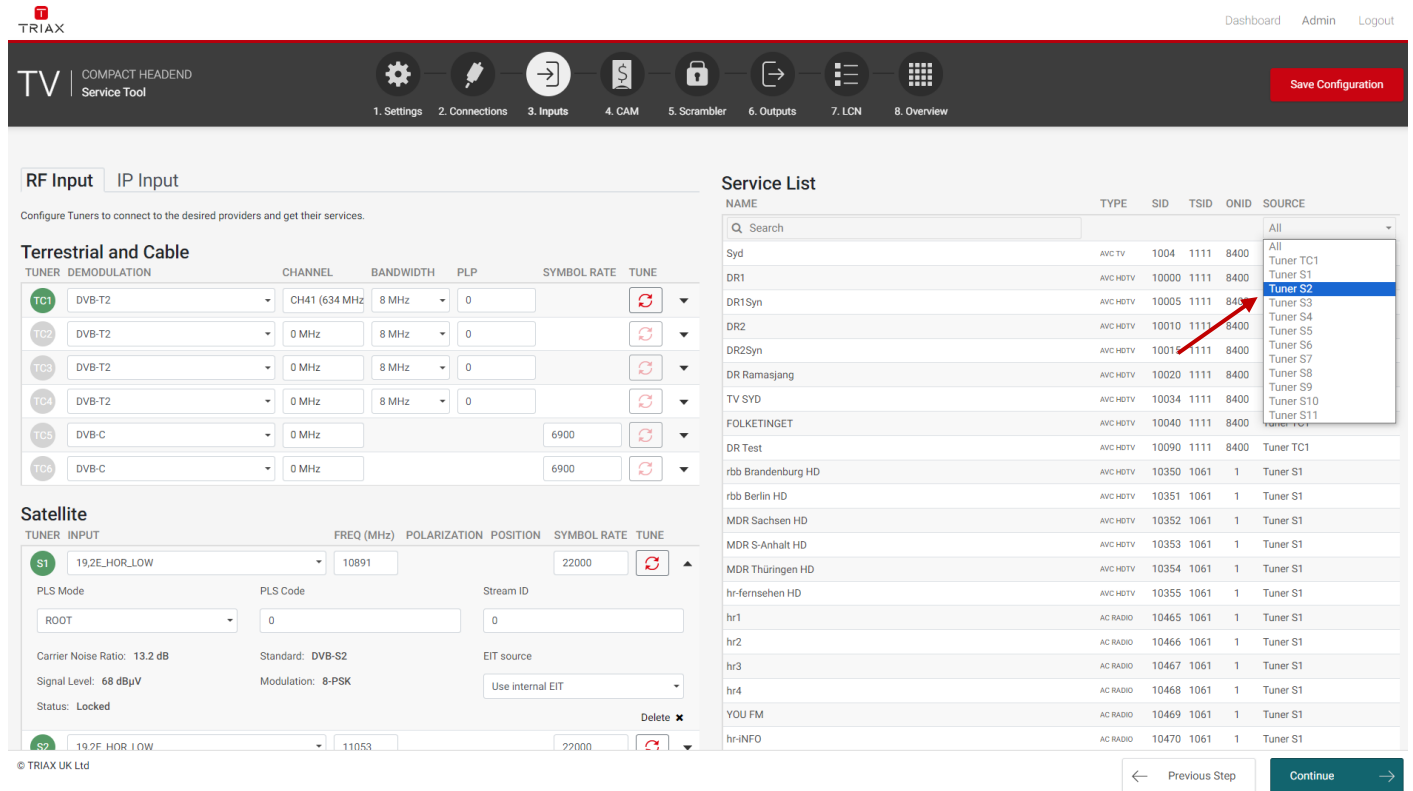

**Service List**

NAME	TYPE	SID	TSID	ONID	SOURCE
Syd	AVC TV	1004	1111	8400	All
DR1	AVC HDTV	10000	1111	8400	Tuner TC1
DR1Syn	AVC HDTV	10005	1111	8400	Tuner S1
DR2	AVC HDTV	10010	1111	8400	Tuner S2
DR2Syn	AVC HDTV	10015	1111	8400	Tuner S3
DR Ramasjang	AVC HDTV	10020	1111	8400	Tuner S4
TV SYD	AVC HDTV	10034	1111	8400	Tuner S5
FOLKETINGET	AVC HDTV	10040	1111	8400	Tuner S6
DR Test	AVC HDTV	10090	1111	8400	Tuner S7
rbb Brandenburg HD	AVC HDTV	10350	1061	1	Tuner S8
rbb Berlin HD	AVC HDTV	10351	1061	1	Tuner S9
MDR Sachsen HD	AVC HDTV	10352	1061	1	Tuner S10
MDR S-Anhalt HD	AVC HDTV	10353	1061	1	Tuner S11
MDR Thüringen HD	AVC HDTV	10354	1061	1	Tuner S12
hr-fernsehen HD	AVC HDTV	10355	1061	1	Tuner S13
hr1	AC RADIO	10465	1061	1	Tuner S14
hr2	AC RADIO	10466	1061	1	Tuner S15
hr3	AC RADIO	10467	1061	1	Tuner S16
hr4	AC RADIO	10468	1061	1	Tuner S17
YOU FM	AC RADIO	10469	1061	1	Tuner S18
hr-INFO	AC RADIO	10470	1061	1	Tuner S19

Name: Name of the TV or radio service

**Note:**

If you enter a string in the search field of the service name all services which contain the string are listed in the service list.

Type: Audio and video type of service

SID: Service Identifier

TSID: Transport Stream Identifier

ONID: Original Network Identifier

Source: Tuner number where the service is received

## 5.8 IP input

### 5.8.1 Physical connectivity

The TDcH & TDmH headends have 1 IP input for IPTV-in, marked with SFP label, and without a specific colour ring



*Note:*

The TDcH & TDmH headends system must be connected to a Gigabit network switch to receive and deliver IP services. The network switch must support IGMP version 2 / 3 and contain an adequate number of ports.

Cat 5e shielded or better network cables must be used.

#### Optional hardware:

A fibre-optic transceiver can be used instead of an RJ45 SFP transceiver. This is especially relevant for pre-existing optical installations, or for installations with high levels of interference and/or total cable lengths exceeding 100m. The fibre-optic transceiver must be ordered separately.

Item No.:	492086	SFP RJ45
Item No.:	492087	SFP Fiber 850nm EOLS-8512-MXX (500m)
Item No.:	492088	SFP Fiber 1310nm EOLS-1324-02XX (2km)

### 5.8.2 IP-in licenses

IP input licenses need to be purchased from TRIAX to be able to receive IP services through the TDcH & TDmH headend system.

Required license numbers:

Item No.:	418745	TDcH 4 x IP-in streams license
Item No.:	418746	TDcH 16 x IP-in streams license
Item No.:	418747	TDcH 96 x IP-in streams license
Item No.:	418752	TDmH 48 x IP-in streams license
Item No.:	418753	TDmH 16 x IP-in streams license
Item No.:	418754	TDmH 4 x IP-in streams license

Licenses are activated using License handling in the Administration window.

### 5.8.3 Requirements

The headend system includes basic IPTV functionality which enables service delivery over a packet-switched network infrastructure.

To handle IP input through the Link sockets the following requirements must be satisfied:

- IP multicast streaming (UDP streaming)
- Possibility of RTP
- Possibility of IGMP version 2 and version 3
- If no source address is configured, then is IGMPv2 used
- If a source address is configured, then is IGMPv3 used with SSM (Source Specific Multicast)
- SPTS or MPTS including PAT, PMT, CAT, optional SDT

The TDcH & TDmH supports both SPTS and MPTS. With MPTS an inbound stream can contain multiple programmes. The license limits the number of IP-in streams. It does not limit the number of services, thus receiving MPTS can carry more services than the value of the license limit.

**Important:**

The TDcH & TDmH headend system supports up to 7 TS packets per IP packet at the IP input.

The TDcH & TDmH headend system does not support IP fragmentation at the IP input, which may occur if the IP packets are transmitted over a network with a


Maximum Transmission Unit (MTU) less than approximately  $80 + N \cdot 188$  bytes, where N is the number of packets per IP packet..


Recommended settings are 7 TS packets per IP packet and a minimum MTU of 1500 bytes in the entire network path

Licenses for IP output are required to be able to use the IPTV functionality in the headend.  
The licenses can be purchased from TRIAX Sales, and need to be activated, see: "Activating licenses".

### 5.8.4 Configuration in GUI


Receive an IP stream by following the steps below:

- 1) Select the *Inputs* tab in the panes.
- 2) Select the *IP Input* sub-tab.
- 3) Press the New IP input button for a new IP input option.
- 4) Specify the desired IP address and associated UDP port number, and if necessary, the Source address in the corresponding fields.
- 5) Press the Search button  to receive the IP stream
- 6) System will automatically update if EIT detected and the rate [Mbit/s] for the stream plus total rate.  
By default, the EIT is inside each multicast stream is used.
- 7) An alternative EIT can be configured by selecting the alternative source from the dropdown list among the configured IP inputs multicast addresses.

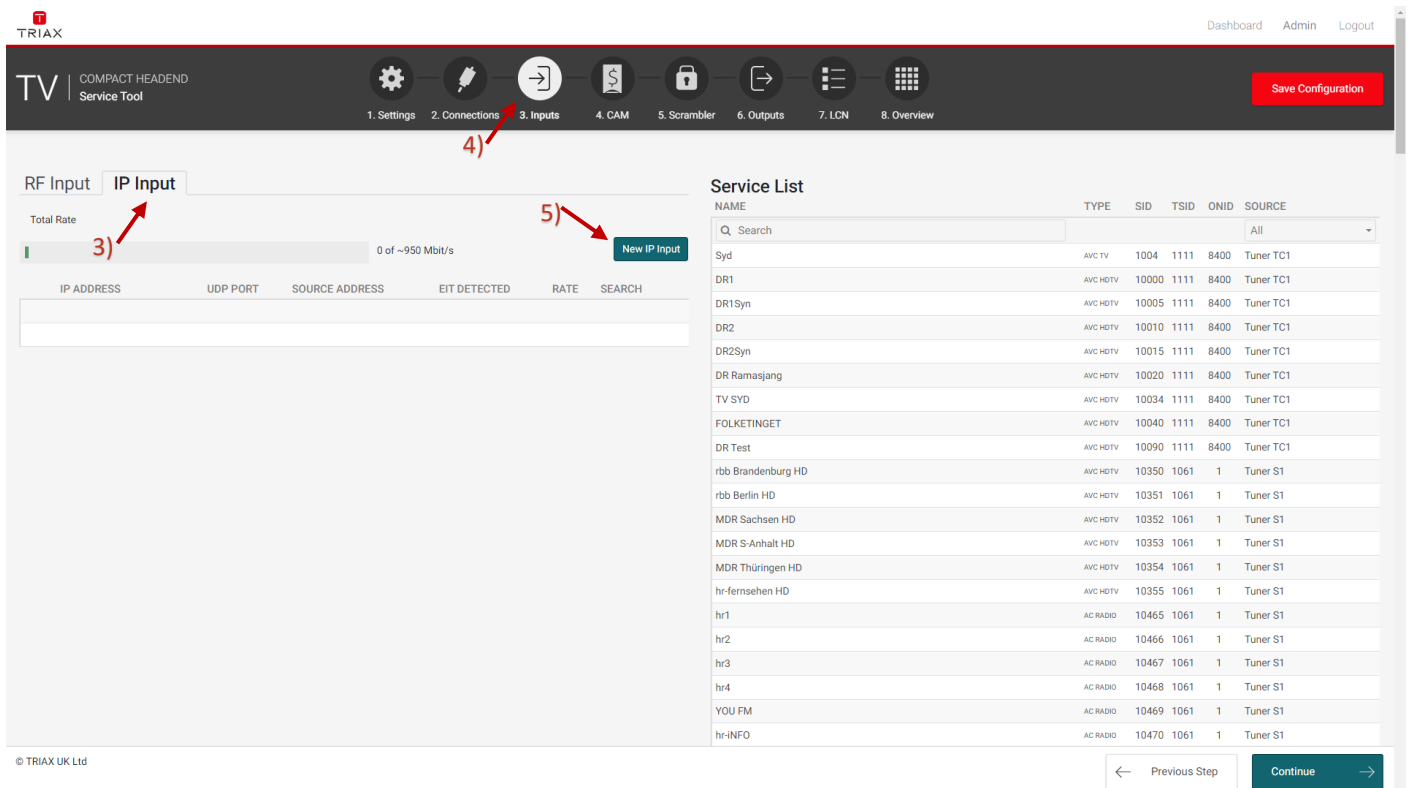


The screenshot shows the TRIAX GUI with the 'Inputs' tab selected. The 'IP Input' sub-tab is active. A red arrow labeled '3)' points to the 'New IP Input' button. Another red arrow labeled '4)' points to the 'IP ADDRESS' field. A third red arrow labeled '5)' points to the 'Search' button. The 'Service List' table on the right displays various services and their details.

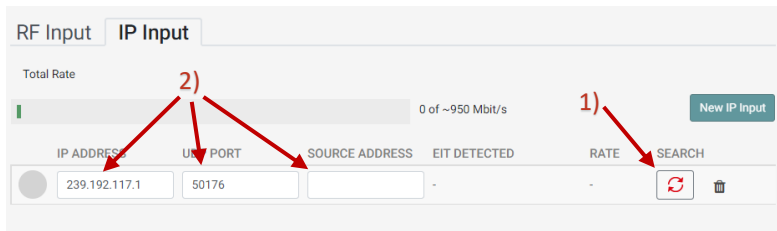

NAME	TYPE	SID	TSID	ONID	SOURCE
Syd	AVC TV	1004	1111	8400	Tuner TC1
DR1	AVC HDTV	10000	1111	8400	Tuner TC1
DR1Syn	AVC HDTV	10005	1111	8400	Tuner TC1
DR2	AVC HDTV	10010	1111	8400	Tuner TC1
DR2Syn	AVC HDTV	10015	1111	8400	Tuner TC1
DR Ramasjang	AVC HDTV	10020	1111	8400	Tuner TC1
TV SYD	AVC HDTV	10034	1111	8400	Tuner TC1
FOLKETINGET	AVC HDTV	10040	1111	8400	Tuner TC1
DR Test	AVC HDTV	10090	1111	8400	Tuner TC1
rbb Brandenburg HD	AVC HDTV	10350	1061	1	Tuner S1
rbb Berlin HD	AVC HDTV	10351	1061	1	Tuner S1
MDR Sachsen HD	AVC HDTV	10352	1061	1	Tuner S1
MDR S-Anhalt HD	AVC HDTV	10353	1061	1	Tuner S1
MDR Thüringen HD	AVC HDTV	10354	1061	1	Tuner S1
hr-fernsehen HD	AVC HDTV	10355	1061	1	Tuner S1
hr1	AC RADIO	10465	1061	1	Tuner S1
hr2	AC RADIO	10466	1061	1	Tuner S1
hr3	AC RADIO	10467	1061	1	Tuner S1
hr4	AC RADIO	10468	1061	1	Tuner S1
YOU FM	AC RADIO	10469	1061	1	Tuner S1
hr-INFO	AC RADIO	10470	1061	1	Tuner S1

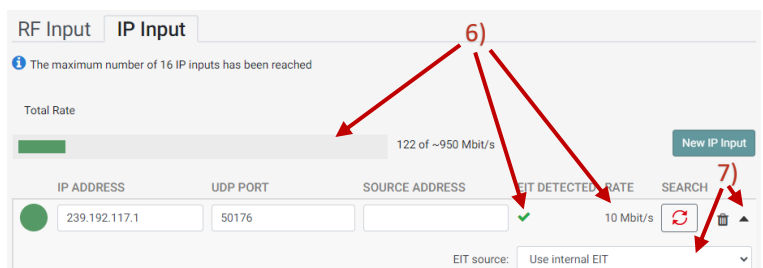


The screenshot shows the 'IP Input' form. Red arrows labeled '1)' and '2)' point to the 'IP ADDRESS' and 'UDP PORT' fields respectively. The 'New IP Input' button is also visible.



The screenshot shows the 'IP Input' form with a message: "The maximum number of 16 IP inputs has been reached". Red arrows labeled '6)' and '7)' point to the 'EIT DETECTED' and 'EIT source' dropdown menu respectively. The 'New IP Input' button is also visible.

Previously selected services can be refreshed when pressing the Search/Refresh  button  
Previously selected services can be deleted when pressing the Bin button 

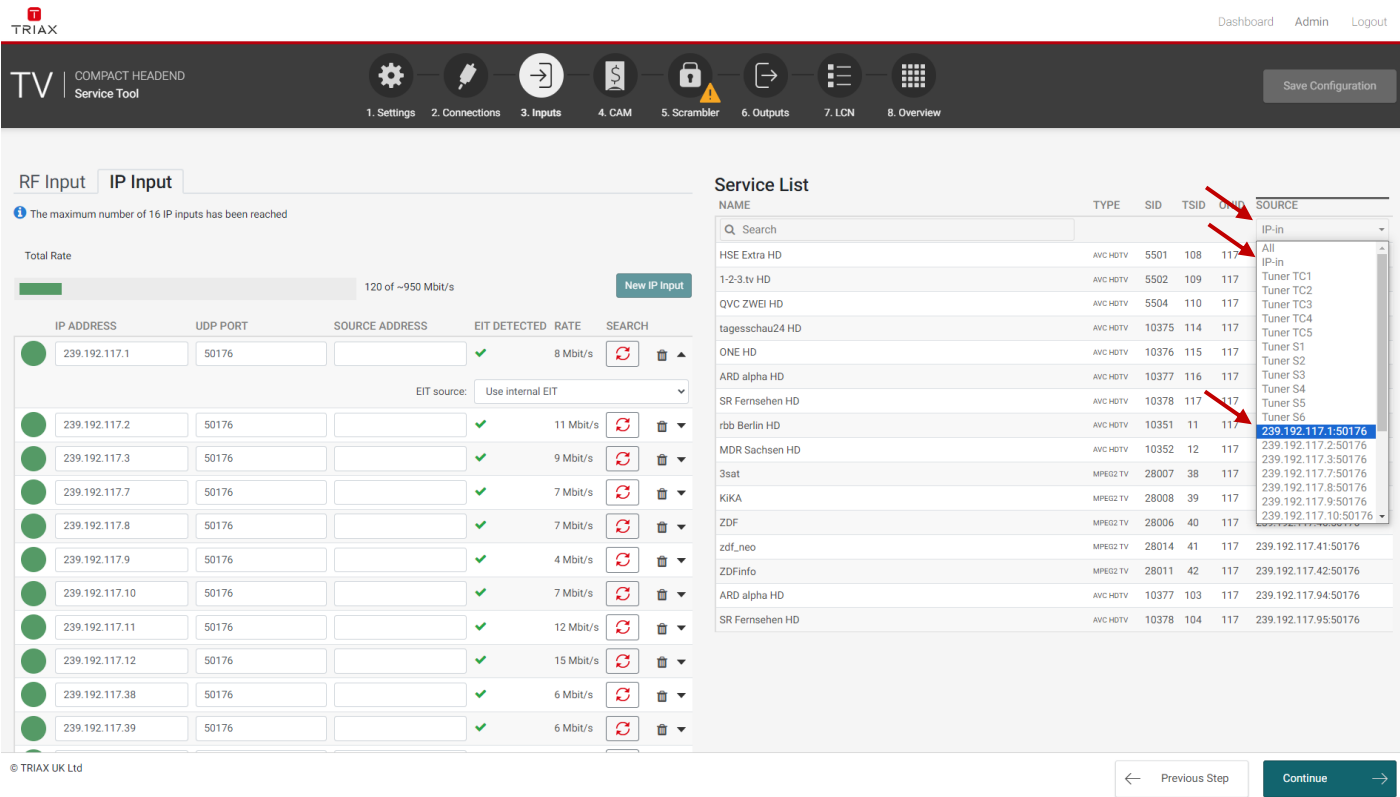























RF Input **IP Input**

The maximum number of 16 IP inputs has been reached

Total Rate: 120 of ~950 Mbit/s

New IP Input

IP ADDRESS	UDP PORT	SOURCE ADDRESS	EIT DETECTED	RATE	SEARCH
239.192.117.1	50176		✓	8 Mbit/s	 
239.192.117.2	50176		✓	11 Mbit/s	 
239.192.117.3	50176		✓	9 Mbit/s	 
239.192.117.7	50176		✓	7 Mbit/s	 
239.192.117.8	50176		✓	7 Mbit/s	 
239.192.117.9	50176		✓	4 Mbit/s	 
239.192.117.10	50176		✓	7 Mbit/s	 
239.192.117.11	50176		✓	12 Mbit/s	 
239.192.117.12	50176		✓	15 Mbit/s	 
239.192.117.38	50176		✓	6 Mbit/s	 
239.192.117.39	50176		✓	6 Mbit/s	 

EIT source: Use internal EIT

### Service List

NAME	TYPE	SID	TSID	UNID	SOURCE
Q Search					
HSE Extra HD	AVC HDTV	5501	108	117	IP-in
1-2-3.tv HD	AVC HDTV	5502	109	117	IP-in
QVC ZWEI HD	AVC HDTV	5504	110	117	Tuner TC1
tagesschau24 HD	AVC HDTV	10375	114	117	Tuner TC2
ONE HD	AVC HDTV	10376	115	117	Tuner TC3
ARD alpha HD	AVC HDTV	10377	116	117	Tuner TC4
SR Fernsehen HD	AVC HDTV	10378	117	117	Tuner TC5
rbb Berlin HD	AVC HDTV	10351	11	117	Tuner S1
MDR Sachsen HD	AVC HDTV	10352	12	117	Tuner S2
3sat	MPEG2 TV	28007	38	117	Tuner S3
KIKA	MPEG2 TV	28008	39	117	Tuner S4
ZDF	MPEG2 TV	28006	40	117	Tuner S5
zdf_neo	MPEG2 TV	28014	41	117	239.192.117.41:50176
ZDFinfo	MPEG2 TV	28011	42	117	239.192.117.42:50176
ARD alpha HD	AVC HDTV	10377	103	117	239.192.117.94:50176
SR Fernsehen HD	AVC HDTV	10378	104	117	239.192.117.95:50176

© TRIAX UK Ltd

Previous Step Continue

### List of found services

On the right hand in the GUI in the *Service List* you can filter the available services to display only the IP-in services. To highlight/sort the services received via "IP Input" select "IP-in" under "SOURCE" at the *Service List*. To see services from a specific IP-in stream select the actual Multicast address e.g. 239.192.117.1:50176.

## 5.9 Media Player

### 5.9.1 Physical connectivity and storage

The TDcH & TDmH headends are build at a strong platform that also offers playback of transport stream files. The files shall be uploaded to the headend via the GUI via Ethernet port 1. The storage size for files are 2GB.



### 5.9.2 Media Player licenses

Media Player licenses need to be purchased from TRIAX to be able to playback files via the TDcH & TDmH headend system.

Required license numbers:

Item No.:	418780	TDcH 2 x Media Player license
Item No.:	418781	TDcH 4 x Media Player license
Item No.:	418785	TDmH 2 x Media Player license
Item No.:	418786	TDmH 4 x Media Player license

Licenses are activated using License handling in the Administration window.

### 5.9.3 Requirements, supported formats and codecs

The headend system supports following:

- Upload of following file formats:
  - PDF
    - Conversion directly from PDF files at the system
    - No audio supported
  - MP4 and MPG (MPEG)
    - Conversion needed
    - Container format: MP4 and MPEG
  - TS
    - No conversion done
    - Container format: MPEGTS
- Codecs
  - Supported input video codecs: MPEG2, H264, HEVC (H265)
  - Supported input audio codecs: AAC, AC3, MP3, MP2
  - Conversion to video codecs: MPEG2, H264
  - Conversion to audio codecs: AAC, AC3, MP3, MP2
  -
- Conversion to Max Bitrate in the range 1-50Mbps.

#### Important:

Licenses for Media Player are required to be able to use the Media Player functionality in the headend.  
The licenses can be purchased from TRIAX Sales, and need to be activated, See: "Activating licenses".


### 5.9.4 Configuration Media Player in GUI; Upload content

Content have to be available to be select at one of the Media Players, thus content must be uploaded first.


By default only the “TRIAX Media Player Default” content exist at the device. This default content can be used when configuring the Media Player including routing it to outputs.

To upload content for the Media Player follow the steps below:


- 1) Select the *Inputs* tab in the panes.
- 2) Select the *Media Player* sub-tab.
- 3) Press the *Add content* button for uploading content for the Media Player.
- 4) Chose a file and press *Upload*.
- 5) When the file been analysed with success, press Close. The analysing part will fail, if trying to add a file does not comply to supported formats.
- 6) The successful uploaded content is shown under *Media Storage*.
- 7) A TS file will be shown directly under *Playable content*.
- 8) Other format files need to be converted before it is playable. Those uploaded content are listed under *Non-playable content*.

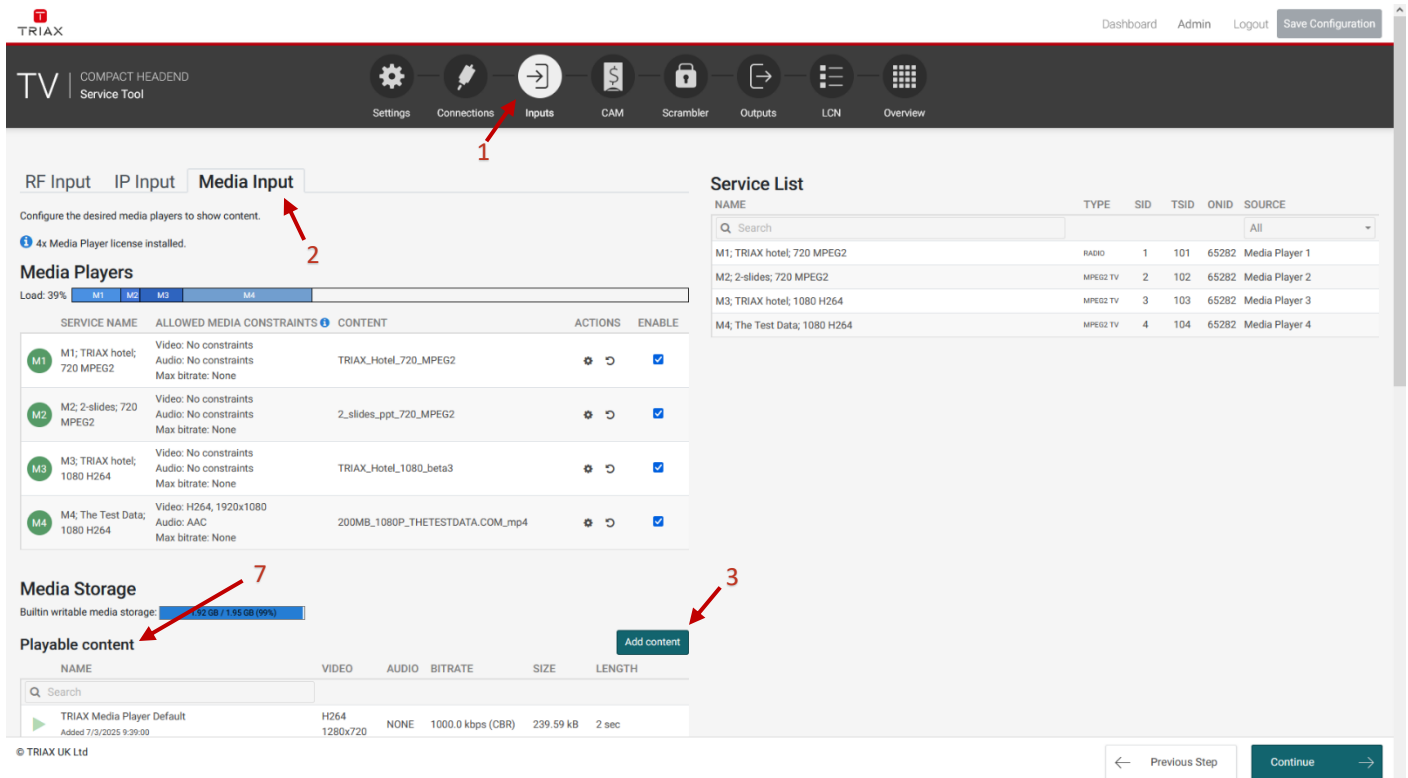

The screenshot shows the TRIAX TV COMPACT HEADEND Service Tool interface. The top navigation bar includes Settings, Connections, **Inputs** (selected), CAM, Scrambler, Outputs, LCN, and Overview. The Inputs section has sub-tabs for RF Input, IP Input, and **Media Input** (selected). The Media Input section displays a 'Media Players' table with columns for SERVICE NAME, ALLOWED MEDIA CONSTRAINTS, CONTENT, ACTIONS, and ENABLE. The table lists four media players: M1 (TRIAX hotel; 720 MPEG2), M2 (2-slides; 720 MPEG2), M3 (TRIAX hotel; 1080 H264), and M4 (The Test Data; 1080 H264). Below the table is the 'Media Storage' section showing 'Builtin writable media storage' with a progress bar. The 'Playable content' section displays a table with columns for NAME, VIDEO, AUDIO, BITRATE, SIZE, and LENGTH. The table lists one playable content item: TRIAX Media Player Default. The 'Add content' button is visible in the bottom right corner.

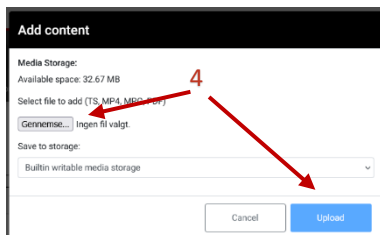

The 'Add content' dialog box shows the 'Media Storage' section with 'Available space: 32.67 MB'. The 'Select file to add (TS, MP4, MPEG-2)' section is active, showing a file named 'Gerniese... Ingen fil valgt'. The 'Save to storage' section shows 'Builtin writable media storage'. The 'Upload' button is highlighted.

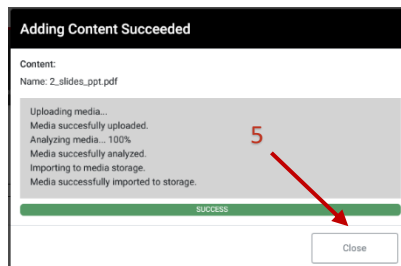

The 'Adding Content Succeeded' dialog box shows the content name '2\_slides\_ppt.pdf'. The progress bar is green, indicating success. The 'Close' button is highlighted.



### 5.9.5 Configuration Media Player in GUI; Convert PDF content

Precondition: Upload content. For information how to upload read the previous section.


This section describe conversion of PDF. See next section for conversion of MP4 and MPG. Conversion not need for TS files.

To convert content for the Media Player follow the steps below:

- 9) Under the *Non-playable content*, press the *Convert* button for the content to convert.
- 10) *Seconds per slide*: Select how many seconds each slide (page in the PDF) shall be shown at the screen.
- 11) *Target service*: By default *Custom*. Custom means that the *Video Codec*, *Video Resolution* and *Max Bitrate* are freely configured. Alternatively can one of the Media Players be chosen and the *Constraints* for the current Media Player will then be used. See later-section describing the *Constraints*.
- 12) *Video codec*: Chose the video codec fitting to the TV sets at the installation.
- 13) *Video resolution*: Chose the video resolution fitting to the TV set at the installation.
- 14) *Max Bitrate*: Chose a Max Bitrate that can be handled by the TV sets and at the same time fits with the channel plan for installation. Lower bitrate will allow more space for other services in the channel plan. If the bitrate get too low, the quality will be effected. Default bitrate: 10Mbps.

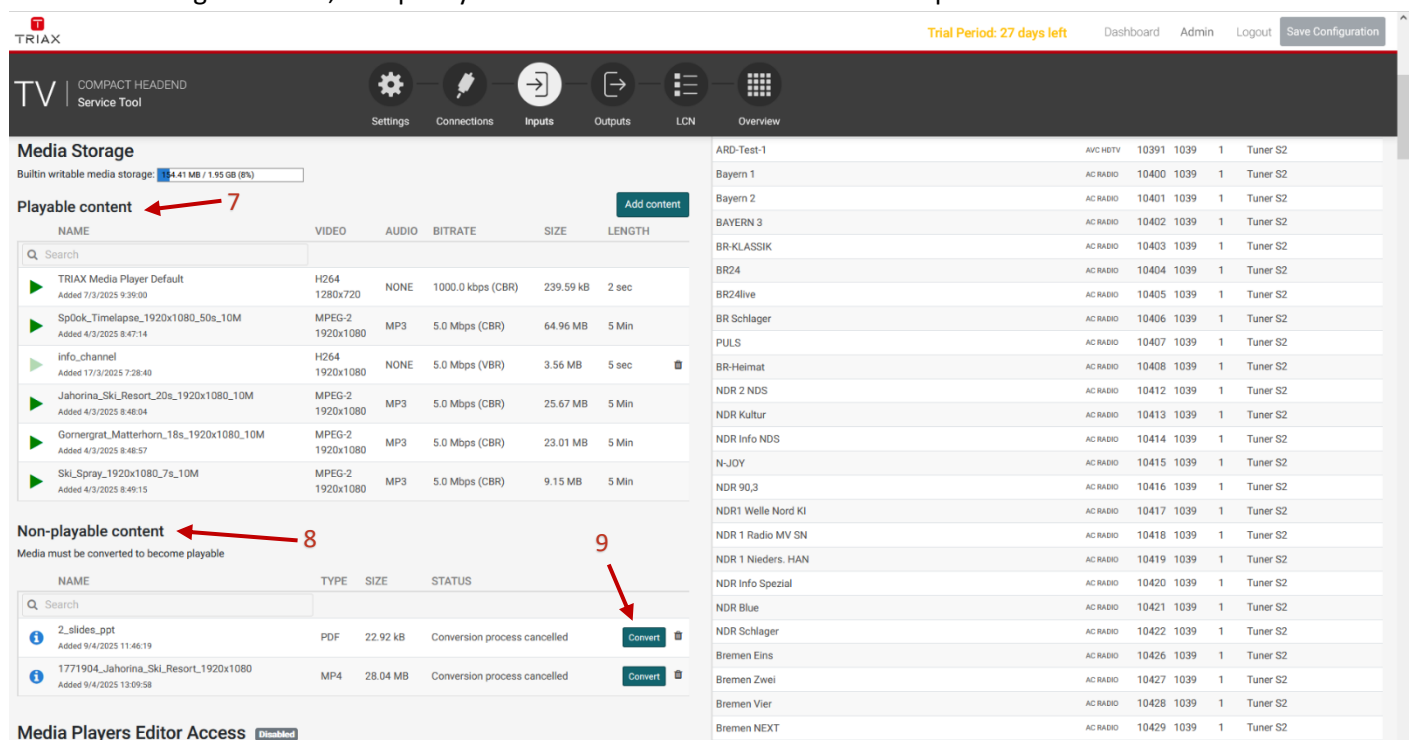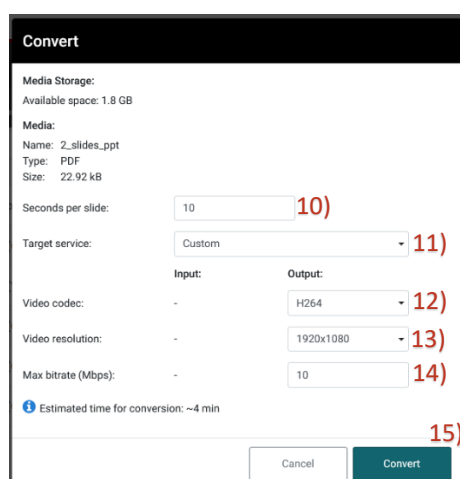16) During conversion the status is available at the Media Input.  
Estimate for remaining is shown.  
The ongoing conversion can be cancelled at the button.

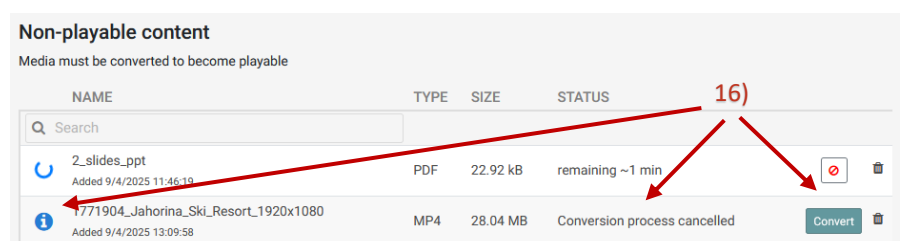


## 5.9.6 Configuration Media Player in GUI; Convert MP4 and MPG content

Precondition: Upload content. For information how to upload read section about uploading.

This section describe conversion of MP4 and MPG. See the previous section for conversion of PDF. Conversion not needed for TS files.

To convert content for the Media Player follow the steps below:

- 17) Under the *Non-playable content*, press the *Convert* button for the content to convert.
- 18) *Target service*: By default *Custom*. Custom means that the *Video Codec*, *Video Resolution* and *Max Bitrate* are freely configured. Alternatively can one of the Media Players be chosen and the *Constraints* for the current Media Player will then be used.
- 19) *Video codec*: Chose the video codec fitting to the TV sets at the installation.
- 20) *Video resolution*: Chose the video resolution fitting to the TV set at the installation.
- 21) *Audio codec*: Chose the audio codec fitting to the TV set at the installation. No audio is also an option.
- 22) *Max Bitrate*: Chose a Max Bitrate that can be handled by the TV sets and at the same time fits with the channel plan for installation. Lower bitrate will allow more space for other services in the channel plan. If the bitrate get too low, the quality will be effected. Default bitrate: 10Mbps.

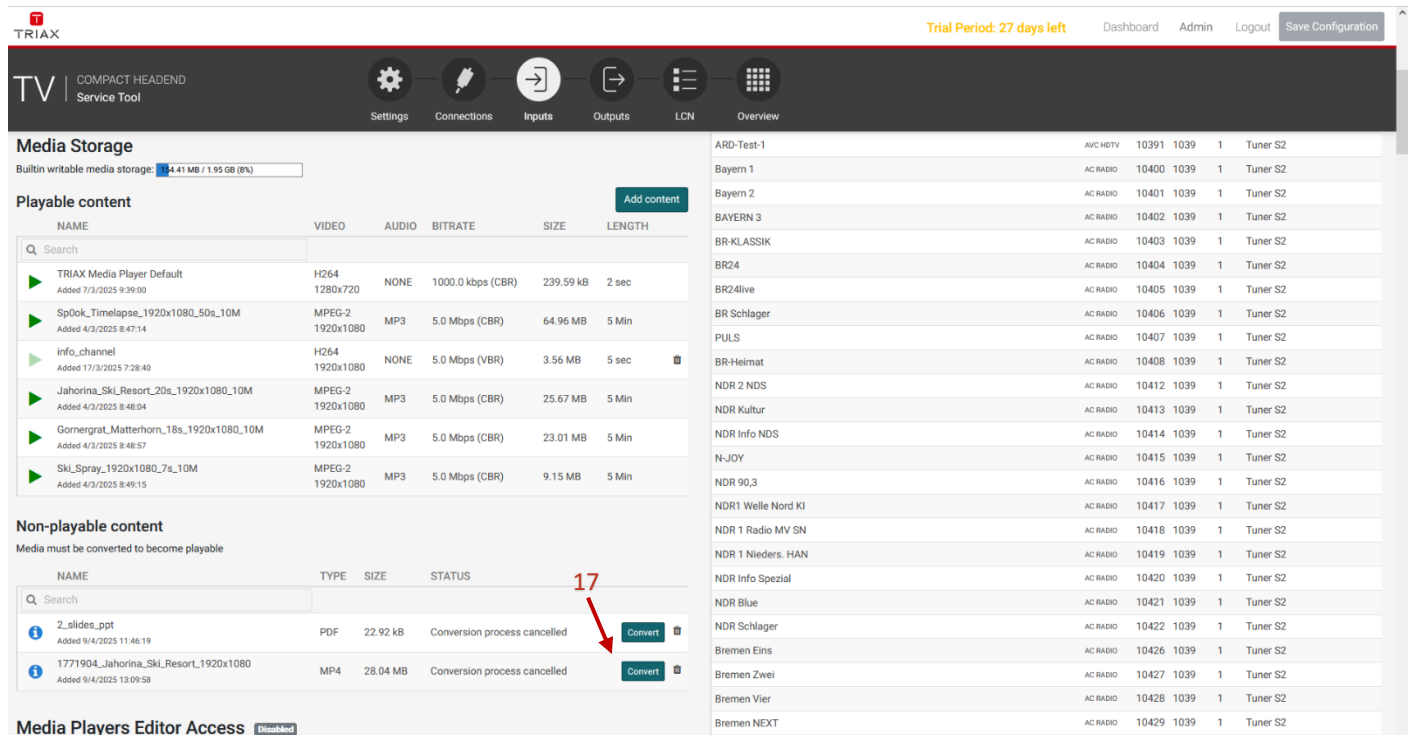

**Media Storage**  
Builtin writable media storage: 4.41 MB / 1.95 GB (8%)


**Playable content**

NAME	VIDEO	AUDIO	BITRATE	SIZE	LENGTH
TRIAX Media Player Default	H264 1280x720	NONE	1000.0 kbps (CBR)	239.59 KB	2 sec
Spook_Timelapse_1920x1080_50s_10M	MPEG-2 1920x1080	MP3	5.0 Mbps (CBR)	64.96 MB	5 Min
Info_channel	H264 1920x1080	NONE	5.0 Mbps (VBR)	3.56 MB	5 sec
Jahorina_Ski_Resort_20s_1920x1080_10M	MPEG-2 1920x1080	MP3	5.0 Mbps (CBR)	25.67 MB	5 Min
Gornegrat_Matterhorn_18s_1920x1080_10M	MPEG-2 1920x1080	MP3	5.0 Mbps (CBR)	23.01 MB	5 Min
Ski_Spray_1920x1080_7s_10M	MPEG-2 1920x1080	MP3	5.0 Mbps (CBR)	9.15 MB	5 Min

**Non-playable content**  
Media must be converted to become playable

NAME	TYPE	SIZE	STATUS
2_slides_ppt	PDF	22.92 kB	Conversion process cancelled
1771904_Jahorina_Ski_Resort_1920x1080	MP4	28.04 MB	Conversion process cancelled

**Media Players Editor Access** Disabled

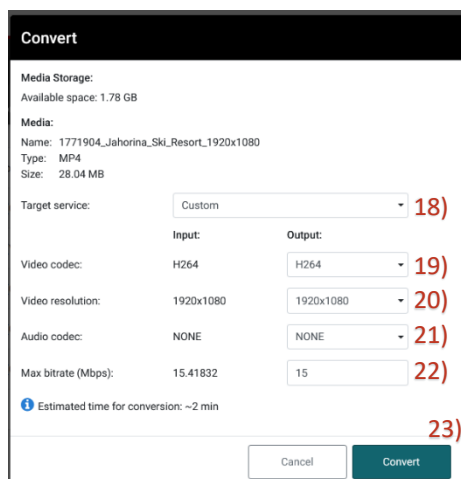

**Convert**

Media Storage:  
Available space: 1.78 GB

Media:  
Name: 1771904\_Jahorina\_Ski\_Resort\_1920x1080  
Type: MP4  
Size: 28.04 MB

Target service: Custom

Input: H264 Output: H264

Video codec: H264

Video resolution: 1920x1080


Audio codec: NONE

Max bitrate (Mbps): 15.41832

Estimated time for conversion: ~2 min

Cancel Convert

24) During conversion the status is available at the Media Input.  
Estimate for remaining is shown.  
The ongoing conversion can be cancelled at the button.

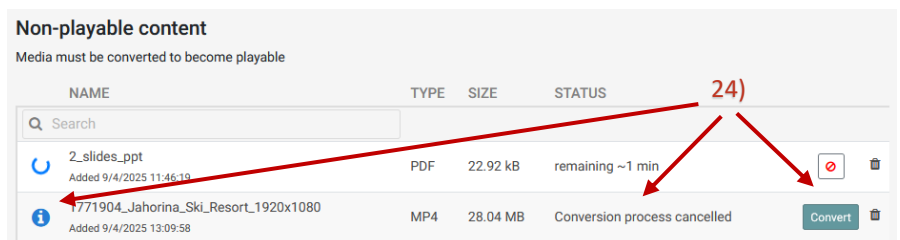

**Non-playable content**  
Media must be converted to become playable

NAME	TYPE	SIZE	STATUS
2_slides_ppt	PDF	22.92 kB	remaining ~1 min
1771904_Jahorina_Ski_Resort_1920x1080	MP4	28.04 MB	Conversion process cancelled

### 5.9.7 Configuration Media Player in GUI; List mode and Schedule more

The Media Player offers to playback content in two modes:


#### **List mode**

Contains one or multiple content(s). The content are playback in an endless loop.







#### **Schedule mode**

Contains content schedule for a configured time. The content are playback in an endless loop from the configured time until then next schedule.

Example for configured List mode and Schedule mode is shown below.

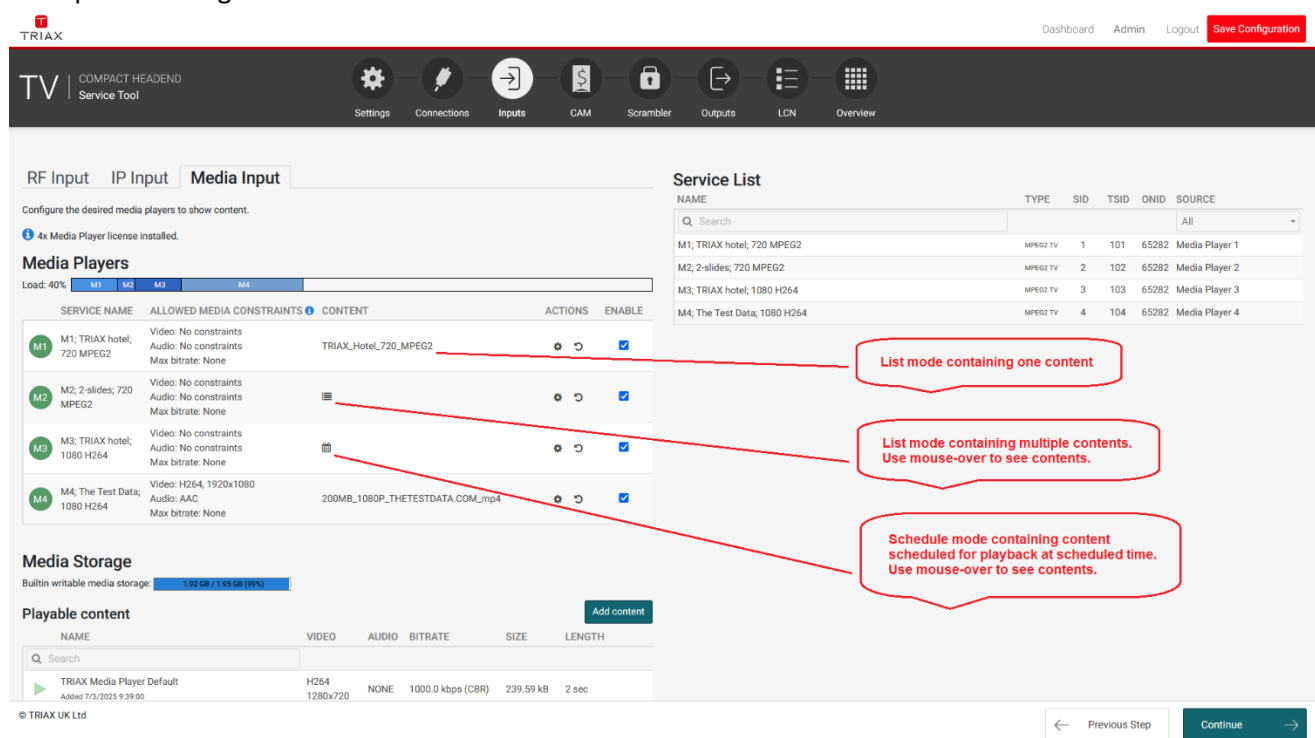

**Media Players**

SERVICE NAME	ALLOWED MEDIA CONSTRAINTS	CONTENT	ACTIONS	ENABLE
M1: TRIAX hotel; 720 MPEG2	Video: No constraints Audio: No constraints Max bitrate: None	TRIAAX_Hotel_720_MPEG2		<input checked="" type="checkbox"/>
M2: 2-slides; 720 MPEG2	Video: No constraints Audio: No constraints Max bitrate: None			<input checked="" type="checkbox"/>
M3: TRIAX hotel; 1080 H264	Video: No constraints Audio: No constraints Max bitrate: None			<input checked="" type="checkbox"/>
M4: The Test Data; 1080 H264	Video: H264, 1920x1080 Audio: AAC Max bitrate: None	200MB_1080P_THETESTDATA.COM_mpeg4		<input checked="" type="checkbox"/>

**Service List**

NAME	TYPE	SID	TSID	ONID	SOURCE
M1: TRIAX hotel; 720 MPEG2	MPEG2 TV	1	101	65282	Media Player 1
M2: 2-slides; 720 MPEG2	MPEG2 TV	2	102	65282	Media Player 2
M3: TRIAX hotel; 1080 H264	MPEG2 TV	3	103	65282	Media Player 3
M4: The Test Data; 1080 H264	MPEG2 TV	4	104	65282	Media Player 4

**Media Storage**

Built-in writable media storage: 1.92 GB / 1.95 GB (95%)

**Playable content**

NAME	VIDEO	AUDIO	BITRATE	SIZE	LENGTH
TRIAAX Media Player Default Added 7/3/2025 9:39:00	H264 1280x720	NONE	1000.0 kbps (CBR)	239.59 kB	2 sec

When routing a Service to a RF or IP output remember to that it can be routed in two modes: Transparent Mode or Service Mode. See 5.13.2 **Select service** for more details.


### 5.9.8 Configuration Media Player in GUI; Constraints

This section describes Constraints in general before going into details for how to configure the Media Player.

Configuring a Media Player offers a option for setting *Constraints* for the current Media Player.

The idea of having Constraints is following:

The Constraints are configured by an technical-person with knowledge of the limitations of the TV set and bandwidth available in the channel plan. Thus, these Constrains can be setup by the technical-person and used later when content is changed by a none-technical-person, who only have interest in changing the content and no interest in technical knowledge. The none-technical-person may only want to change/update the content showing the menu in the restaurant, thus this person only needs to know at what Media Player the restaurant menu is play at, and the person does not need to know technical codec, etc. settings when conversion is done.

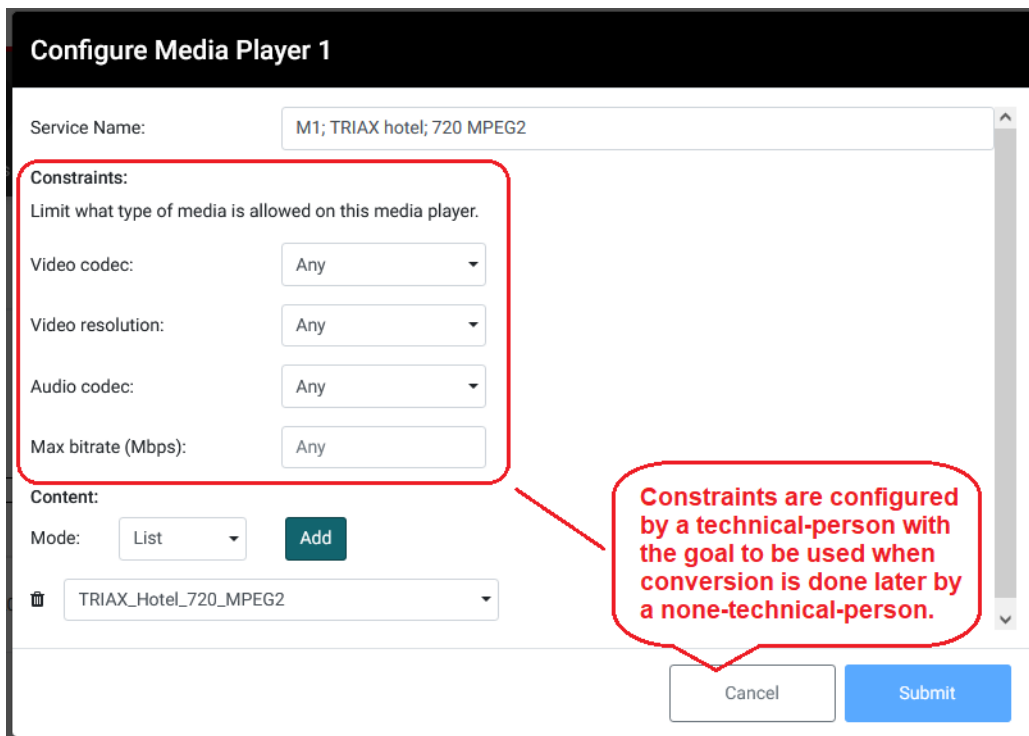

**Configure Media Player 1**

Service Name: M1; TRIAX hotel; 720 MPEG2

**Constraints:**  
Limit what type of media is allowed on this media player.

Video codec: Any

Video resolution: Any

Audio codec: Any

Max bitrate (Mbps): Any

**Content:**

Mode: List **Add**

TRIAX\_Hotel\_720\_MPEG2

Cancel Submit


**Constraints are configured by a technical-person with the goal to be used when conversion is done later by a none-technical-person.**



How to configure the Media Player to List mode and Schedule mode is described in the next sections.

### 5.9.9 Configuration Media Player in GUI; Configure with content in List mode

Precondition: Read the previous sub section describing the Media Player regarding Uploading, Conversion, List Mode vs. Schedule Mode, and Constrains.

To configure content playback in List Mode for the Media Player follow the steps below:

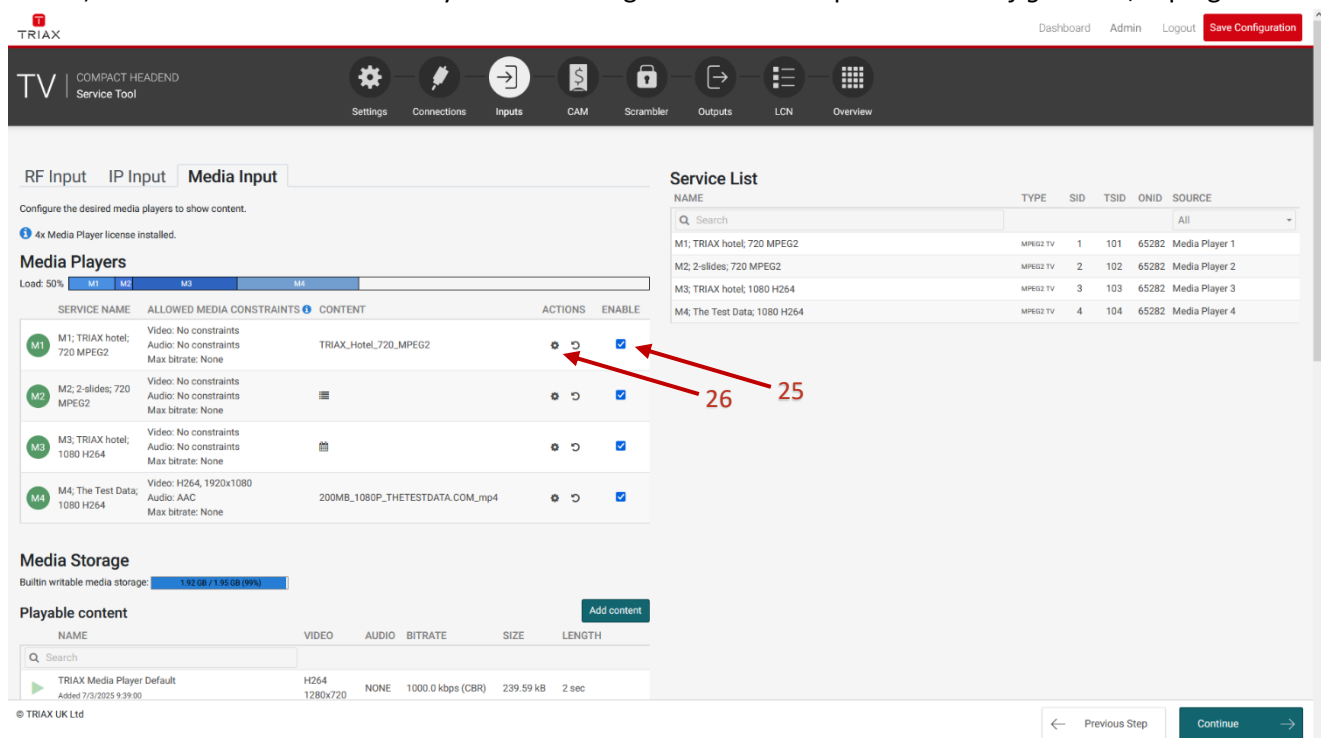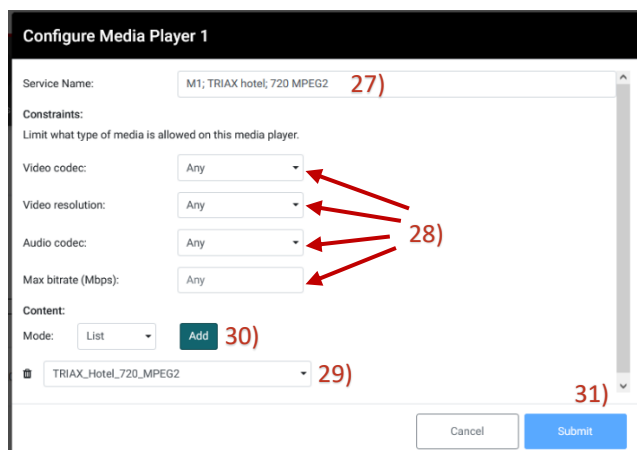

- 25) Press the ENABLE checkbox to enable a Media Player.
- 26) Press the  "Configure-wheel" button for the Media Player.
- 27) **Service Name:** Give the service a name. This name will be used in the rest of the GUI when selecting the service e.g. for IP or RF output. The service name is insert in the SDT, thus also the name shown at the TV sets.
- 28) **Constrains:** See the previous sub-section for this topic. The constrains defines if a content is valid to select for this Media Player. E.g. if choosing H264 Video Codec, then can only content with this video codec be chosen, thus content with MPEG2 video codec will be marked red at the content list.
- 29) Chose the content for be playback. Notice the constraints described above.
- 30) **Add:** If more contents shall be playback in an endless loop then chose to add the content.
- 31) **Submit:** Press Submit to carry out the settings. Remember to press *Save Configuration*, top right corner

### 5.9.10 Configuration Media Player in GUI; Configure with content in Schedule mode

Precondition: Read the previous sub section describing the Media Player regarding Uploading, Conversion, List Mode vs. Schedule Mode, and Constrains.

To configure content playback in Schedule Mode for the Media Player follow the steps below:

- 32) Press the ENABLE checkbox to enable a Media Player. See previous section under 25).
- 33) Press the  "Configure-wheel" button for the Media Player. See previous section under 26).
- 34) *Service Name*: Give the service a name. This name will be used in the rest of the GUI when selecting the service e.g. for IP or RF output. The service name is insert in the SDT, thus also the name shown at the TV sets.
- 35) *Constrains*: See the previous sub-section for this topic. The constrains defines if a content is valid to select for this Media Player. E.g. if choosing H264 Video Codec, then can only content with this video codec be chosen, thus content with MPEG2 video codec will be marked red at the content list.
- 36) *Mode*: Chose *Schedule*.
- 37) *Add*: If schedule more then press "+".
- 38) *Content*: Chose content.
- 39) *Time*: Select the time for the content to be playback.
- 40) *Weekday*: Select the weekday for scheduling. To select all days, press 

#### Configure Media Player 1

Service Name:

**Constraints:**  
Limit what type of media is allowed on this media player.























Video codec:

Video resolution:

Audio codec:

Max bitrate (Mbps):

**Content:**  
Mode:

+	Content	Time (hh:mm)	Mon	Tue	Wed	Thu	Fri	Sat	Sun	Info
	outofoffice	17 : 00		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Monday_0800	08 : 00		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Monday_0900	09 : 00		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Monday_1000	10 : 00		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Monday_1100	11 : 00		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Monday_1200	12 : 00		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Monday_1300	13 : 00		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Monday_1400	14 : 00		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Monday_1500	15 : 00		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Monday_1600	16 : 00		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Tuesday_0800	08 : 00		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

5.9.11 Configuration Media Player in GUI; Media Player Editor Access

The Media Player can be access by a none-technical-person for changing the content via a separate login. This log only gains access to changing the Media Player content. To access this login follow the steps below, log out, and log in as “media” user.

How to setup access to this log in is described below:

41) Enter password for the “media” user.

42) Press the *Submit* button. It will be indicated by

Media Players Editor Access Enabled

43) If the access shall be *Disable* button. It will be indicated by

Media Players Editor Access Disabled

44) Log out. At the Login page it is now possible to choose “media” user.

TRIAX

DashboardAdminLogoutSave Configuration

TVCOMPACT HEADENDService Tool

SettingsConnectionsInputsCAMScramblerOutputsLCNOverview

Added 31/3/2025 14:30:08	1280x720	NONE	5.0 Mbps (VBR)	2.83 MB	4 sec
TRIAX_Hotel_720_MPEG2 Added 27/3/2025 10:46:57	1280x720	NONE	12.0 Mbps (VBR)	92.92 MB	1 min 0 sec
TRIAX_Hotel_1080_beta3 Added 25/3/2025 14:30:43	H264 1920x1080	NONE	12.0 Mbps (VBR)	92.94 MB	1 min 0 sec
2_slides_ppt Added 27/3/2025 11:43:15	MPEG-2 1920x1080	NONE	12.0 Mbps (VBR)	30.93 MB	20 sec
DR1_spts_cbr_mux13mbps_adj_no_audio Added 3/4/2025 10:48:01	H264 1280x720	NONE	38.4 Mbps (VBR)	282.48 MB	3 min 4 sec

Non-playable content

Media must be converted to become playable

NAME	TYPE	SIZE	STATUS
2_slides_ppt Added 9/4/2025 17:00:01	PDF	22.92 kB	Convert
200MB_1080P_THETESTDATA.COM_mp4 Added 31/3/2025 15:13:56	MP4	201.94 MB	Convert
DefaultVideo Added 31/3/2025 14:50:06	PDF	206.96 kB	Convert
12_slides_ppt Added 26/3/2025 11:39:14	PDF	30.87 kB	Convert

Media Players Editor Access Disabled

Offer access to change Media Players content via below URL and password. The access is only possible if the password is set.

URL:https://172.27.64.100/#/mediaplayer

Password:\*\*\*\*\*41)SubmitDisable

42)43)

© TRIAX UK Ltd

Previous StepContinue

TVCOMPACT HEADENDService Tool

Login to configure system

Product Code:TDcH 22STC-I

User

admin44)

admin

media


Login

## 5.10 Configuration Media Player simple GUI

A simple GUI page for configuring the content for the Media Player for a none-technical-person.

Read the previous section to enable this GUI page.

At this GUI page only content can be changed. Constraints for the Media Player, how it is routed, etc. is not possible to change. The GUI only contains an overview page for the Media Players as shown below.

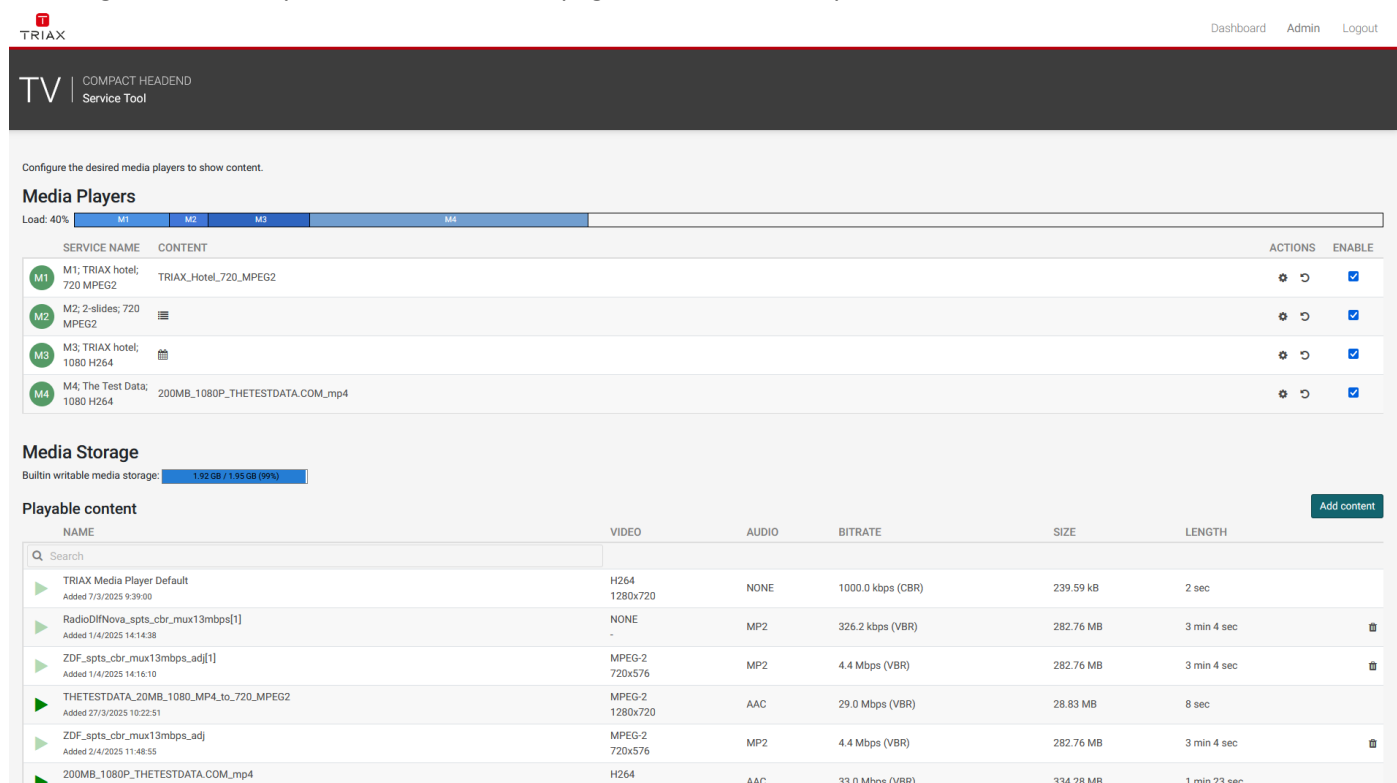

Configure the desired media players to show content.

### Media Players

Load: 40%

SERVICE NAME	CONTENT	ACTIONS	ENABLE
M1: TRIAX hotel; 720 MPEG2	TRIAX_Hotel_720_MPEG2		<input checked="" type="checkbox"/>
M2: 2-slides; 720 MPEG2			<input checked="" type="checkbox"/>
M3: TRIAX hotel; 1080 H264			<input checked="" type="checkbox"/>
M4: The Test Data; 1080 H264	200MB_1080P_THETESTDATA.COM_mp4		<input checked="" type="checkbox"/>


### Media Storage

Built-in writable media storage: 1.92 GB / 1.95 GB (99%)

### Playable content

Add content

NAME	VIDEO	AUDIO	BITRATE	SIZE	LENGTH
TRIAX Media Player Default Added 7/3/2025 9:39:00	H264 1280x720	NONE	1000.0 kbps (CBR)	239.59 kB	2 sec
RadioDfINova_spts_cbr_mux13mbps[1] Added 1/4/2025 14:14:38	NONE	MP2	326.2 kbps (VBR)	282.76 MB	3 min 4 sec
ZDF_spts_cbr_mux13mbps_adj[1] Added 1/4/2025 14:16:10	MPEG-2 720x576	MP2	4.4 Mbps (VBR)	282.76 MB	3 min 4 sec
THETESTDATA_20MB_1080_MP4_to_720_MPEG2 Added 27/3/2025 10:22:51	MPEG-2 1280x720	AAC	29.0 Mbps (VBR)	28.83 MB	8 sec
ZDF_spts_cbr_mux13mbps_adj Added 2/4/2025 11:48:55	MPEG-2 720x576	MP2	4.4 Mbps (VBR)	282.76 MB	3 min 4 sec
200MB_1080P_THETESTDATA.COM_mp4	H264	AAC	33.0 Mbps (VBR)	334.28 MB	1 min 23 sec


The user can press the  button to change the content, like shown in the two examples below:

### Configure Media Player 1

Service Name: M1; TRIAX hotel; 720 MPEG2

Content:

Mode: List Add

 TRIAX\_Hotel\_720\_MPEG2







Cancel Submit

### Configure Media Player 3

Service Name: M3; TRIAX hotel; 1080 H264

Content:

Mode: Schedule

+	Content	Time (hh:mm)	Mon	Tue	Wed	Thu	Fri	Sat	Sun	Info
	TRIAX_Hotel_1080_beta	08 : 00	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
	THETESTDATA_20MB_1	09 : 00	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
	TRIAX_Hotel_1080_beta	10 : 00	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	


Cancel Submit

## 5.11 CAM


### Note:

This functionality is not available on the FTA Versions TDcH 16S-Q, TDcH 16S, TDmH IP, and TDmH S8.

Click the “CAM” tab in the TDcH & TDmH Service Tool to display the CA Modules and administration window.

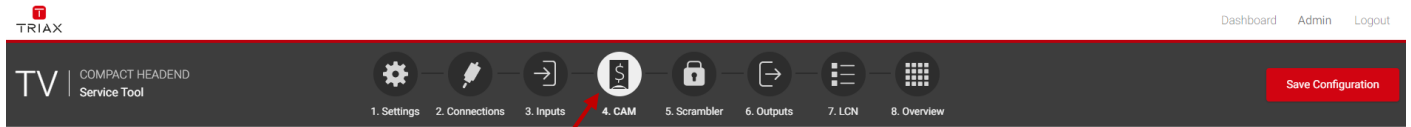


The first time you display the CAM window in a new configuration the module list only displays the number and type of the CA modules that you have inserted in the TDcH & TDmH.

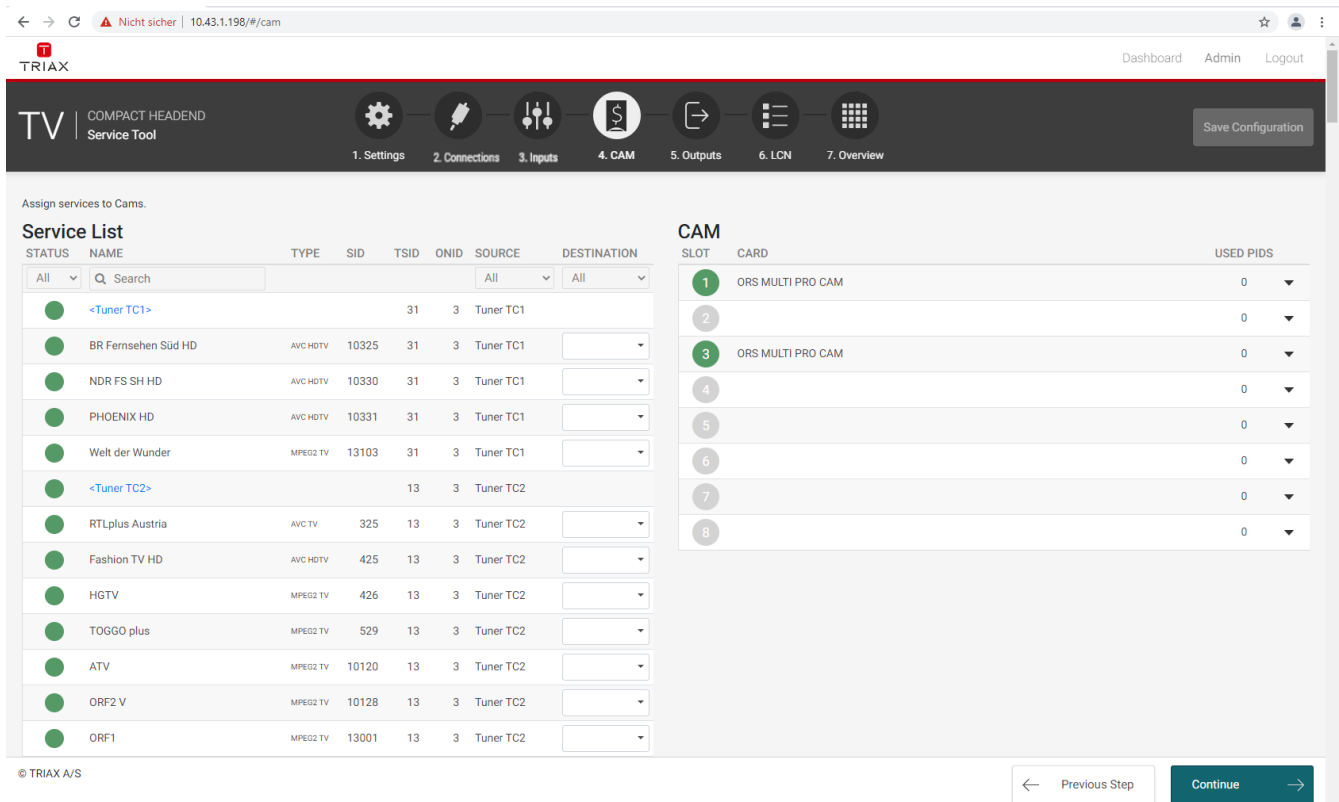

You must configure the CA modules individually. When you open the Configuration window for a CA module in a new configuration, only default values are displayed.

### 5.11.1 CAM / Smart card




You can insert 4 or 8 Conditional Access Modules (CAM) into a TDmH & TDcH Headends

Each CA module can unscramble at least one service. The amount of services and which services depend on the service provider of the CA module and smart card.

### 5.11.2 CAM configuration

At the first step you must assign to a CA module the services the CA module should handle. To assign the services open the drop-down menu under SOURCE and choose the tuner you would like to select services for a CA module.

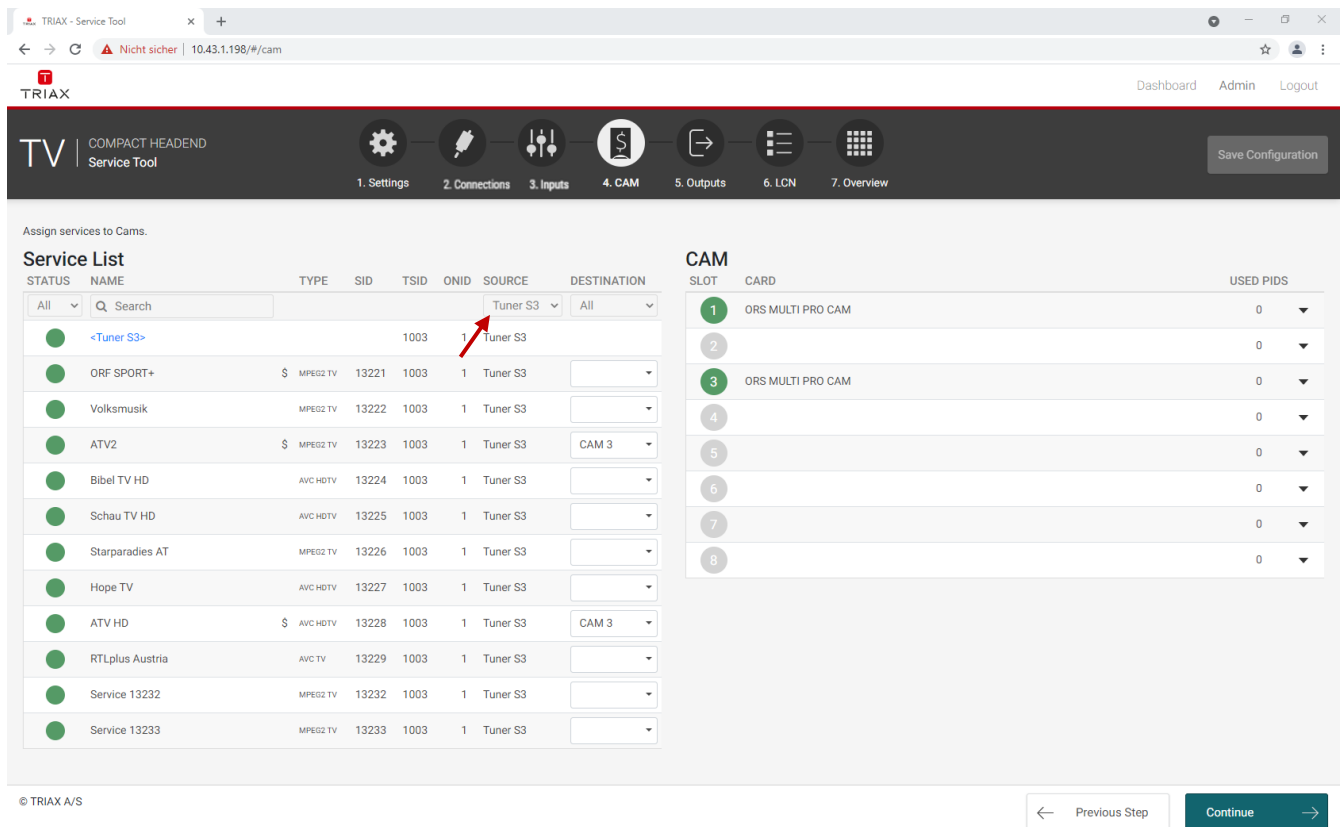

TRIAX - Service Tool

1043.1.198/#/cam

Dashboard Admin Logout

TV | COMPACT HEADEND Service Tool

1. Settings 2. Connections 3. Inputs 4. CAM 5. Outputs 6. LCN 7. Overview

Save Configuration

Assign services to Cams.

Service List							
STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
All	Q Search					Tuner S3	All
●	<Tuner S3>			1003	1	Tuner S3	
●	ORF SPORT+	\$ MPEG2 TV	13221	1003	1	Tuner S3	
●	Volksmusik	MPEG2 TV	13222	1003	1	Tuner S3	
●	ATV2	\$ MPEG2 TV	13223	1003	1	Tuner S3	CAM 3
●	Bibel TV HD	AVC HDTV	13224	1003	1	Tuner S3	
●	Schau TV HD	AVC HDTV	13225	1003	1	Tuner S3	
●	Starparadies AT	MPEG2 TV	13226	1003	1	Tuner S3	
●	Hope TV	AVC HDTV	13227	1003	1	Tuner S3	
●	ATV HD	\$ AVC HDTV	13228	1003	1	Tuner S3	CAM 3
●	RTLplus Austria	AVC TV	13229	1003	1	Tuner S3	
●	Service 13232	MPEG2 TV	13232	1003	1	Tuner S3	
●	Service 13233	MPEG2 TV	13233	1003	1	Tuner S3	

CAM		
SLOT	CARD	USED PIDS
1	ORS MULTI PRO CAM	0
2		0
3	ORS MULTI PRO CAM	0
4		0
5		0
6		0
7		0
8		0

© TRIAX A/S

← Previous Step Continue →


In the DESTINATION column you can now choose the services you would like to send to a CA module.

## Note:

It is possible to send services from different transponders to the same CA modules, so that the number of CA modules can be reduced.

Please do not overload the CA module with services and please ensure that the supported amount of PIDs is not overloaded.

The supplier of the CA module can inform you about how many PIDs the CA module can support.

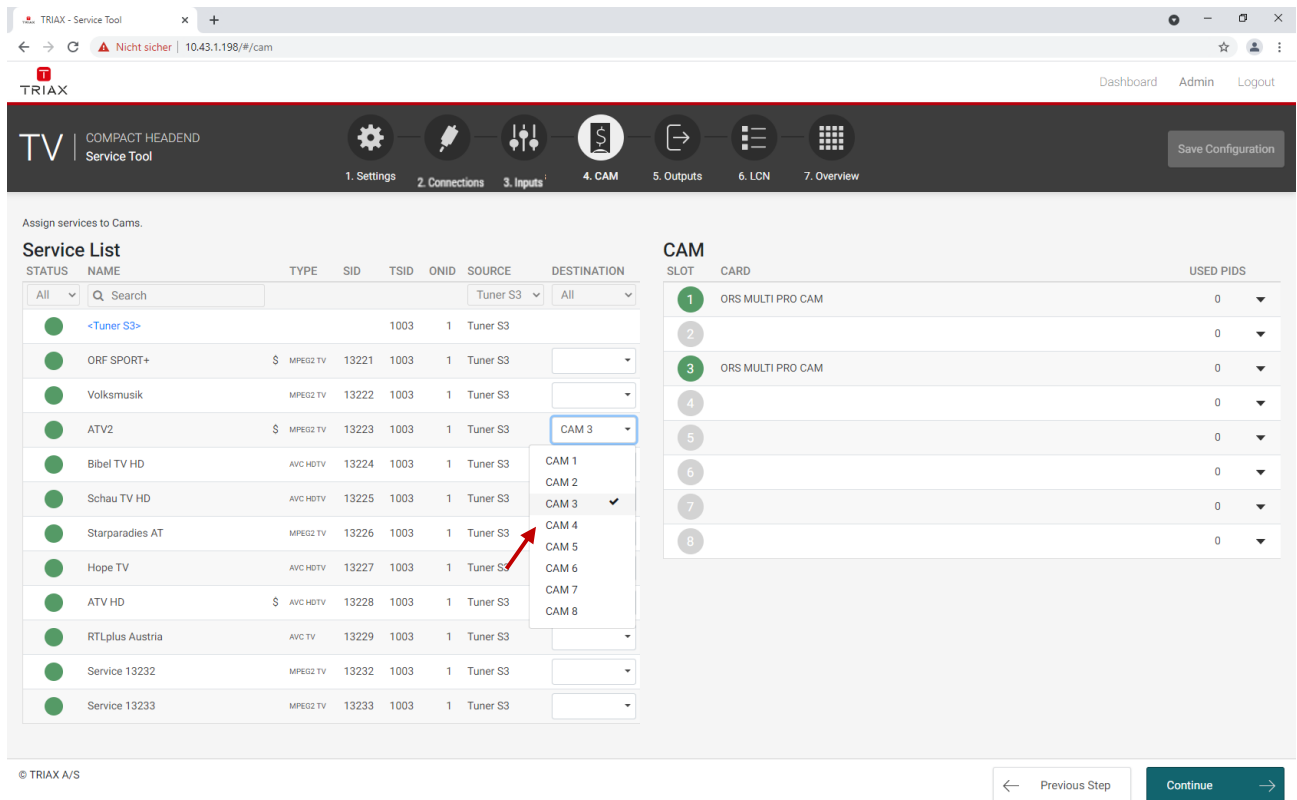

Assign services to Cams.

### Service List

STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
All	Q Search					Tuner S3	All
●	<Tuner S3>				1003	1	Tuner S3
●	ORF SPORT+	\$ MPEG2 TV	13221	1003	1	Tuner S3	
●	Volksmusik	MPEG2 TV	13222	1003	1	Tuner S3	
●	ATV2	\$ MPEG2 TV	13223	1003	1	Tuner S3	CAM 3
●	Bibel TV HD	AVC HDTV	13224	1003	1	Tuner S3	
●	Schau TV HD	AVC HDTV	13225	1003	1	Tuner S3	
●	Starparadies AT	MPEG2 TV	13226	1003	1	Tuner S3	
●	Hope TV	AVC HDTV	13227	1003	1	Tuner S3	
●	ATV HD	\$ AVC HDTV	13228	1003	1	Tuner S3	
●	RTLplus Austria	AVC TV	13229	1003	1	Tuner S3	
●	Service 13232	MPEG2 TV	13232	1003	1	Tuner S3	
●	Service 13233	MPEG2 TV	13233	1003	1	Tuner S3	

### CAM

SLOT	CARD	USED PIDS
1	ORS MULTI PRO CAM	0
2		0
3	ORS MULTI PRO CAM	0
4		0
5		0
6		0
7		0
8		0

© TRIAX A/S

← Previous Step Continue →

By clicking the expand button on the CA menu the detailed configuration menu opens.

### CAM

SLOT	CARD	LOAD	USED SERVICES	USED PIDS										
1	IRDETO CAM PRO	23 of 72 Mbit/s	3	6										
2	Irdeto Access	11 of 72 Mbit/s	4	4										
Card Speed: 72 Mbit/s Card: Running <input checked="" type="checkbox"/> Error Recovery Common Interface														
Associated Services <table border="1"> <thead> <tr> <th>Source</th> <th></th> </tr> </thead> <tbody> <tr> <td>ORF2 W \$</td> <td>Tuner S1</td> </tr> <tr> <td>ORF2 N \$</td> <td>Tuner S1</td> </tr> <tr> <td>ORF2 B \$</td> <td>Tuner S1</td> </tr> <tr> <td>ORF1 \$</td> <td>Tuner S1</td> </tr> </tbody> </table>					Source		ORF2 W \$	Tuner S1	ORF2 N \$	Tuner S1	ORF2 B \$	Tuner S1	ORF1 \$	Tuner S1
Source														
ORF2 W \$	Tuner S1													
ORF2 N \$	Tuner S1													
ORF2 B \$	Tuner S1													
ORF1 \$	Tuner S1													
3		0 of 0 Mbit/s	0	0										
4	Irdeto Access	9 of 72 Mbit/s	4	4										
5	IRDETO CIPLUS CAM	30 of 72 Mbit/s	6	24										

Reset ↺


### Card speed:

Open the drop-down list with the card speeds if you want to use a higher card speed than the default. Select the required card speed.

### Load:

The load shows current used payload and how much is free of the accessible payload.

Transport stream packages are dropped if the load bar turns red, in which case the amount of associated services must be reduced.

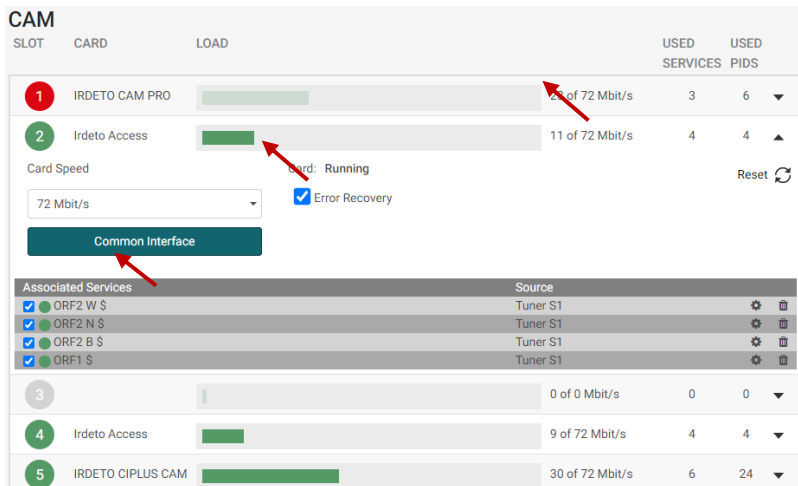

SLOT	CARD	LOAD	USED SERVICES	USED PIDS
1	IRDETO CAM PRO	23 of 72 Mbit/s	3	6
2	Irdeto Access	11 of 72 Mbit/s	4	4
3		0 of 0 Mbit/s	0	0
4	Irdeto Access	9 of 72 Mbit/s	4	4
5	IRDETO CIPLUS CAM	30 of 72 Mbit/s	6	24

### Service list area (Associated Services)

Select the service(s) you want to descramble in the Service list area by clicking the service(s) at the selected button. Scrambled services are marked with a dollar sign - \$.


### Note:

Please note that the services in the CAM menu have to be assigned with the check box to be descrambled!

### Used PIDs:

This number shows how many PIDs the CAM is using for descrambling the TV services.

Please ensure that the CA module is not overloaded with used PIDs. The numbers of PIDs a CA-module can support depends on CA module. Please ask the CAM supplier or the program operator if you are unsure how many PIDs the CA module can support.

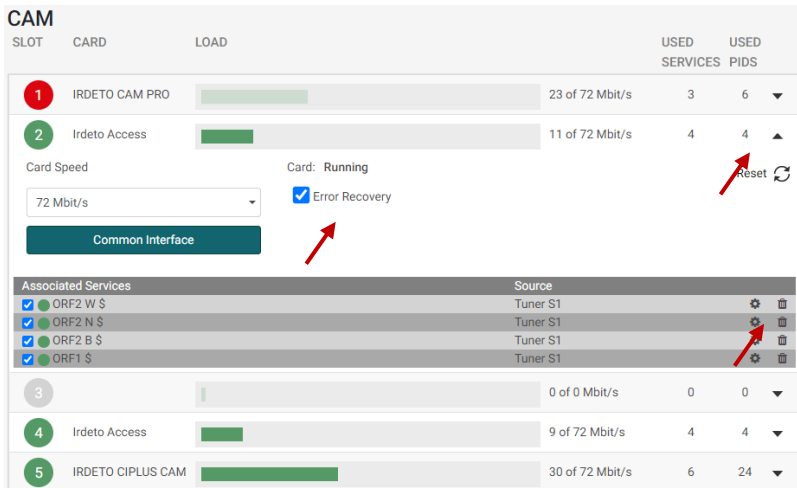

SLOT	CARD	LOAD	USED SERVICES	USED PIDS
1	IRDETO CAM PRO	23 of 72 Mbit/s	3	6
2	Irdeto Access	11 of 72 Mbit/s	4	4
3		0 of 0 Mbit/s	0	0
4	Irdeto Access	9 of 72 Mbit/s	4	4
5	IRDETO CIPLUS CAM	30 of 72 Mbit/s	6	24

### Error Recovery

If you select the “Error Recovery” checkbox then the automatic error recovery is enabled for all services assigned to this CA-module.

### Note:

The Error Recovery function does a constant monitoring of the signal transmission status through the CA module. The CA module is automatically reset if the signal transmission fails. When a CA module is reset, the signal transmission is interrupted for all the services associated with that CA module. The “Error Recovery” checkbox should not be enabled for services where signals are not transmitted on a 24-hour basis.

### Filter options

To change the Filter options for a service, click the Setup button of the service in question to open the Filter options window.

To descramble all PIDs that are not audio or video related, click the “Descramble non audio/video” PIDs checkbox.

By default, all audio PIDs (Packet Identifier) associated with the service are descrambled.


To descramble only selected audio PIDs you must deselect the Descramble all audio PIDs checkbox. Deselecting the Descramble all audio PIDs checkbox displays a field with a drop-down list below the checkbox.

Open the drop-down list and select the language of the audio PID you want to descramble.

An additional field with a language drop-down list is displayed every time you select a language. You can descramble as many audio PIDs as you need.

### 5.11.3 Common interface


Clicking the Common interface button gives you access to information from the smart card inserted in the CA module. The type of information provided by the smart card depends on the card itself and its make.

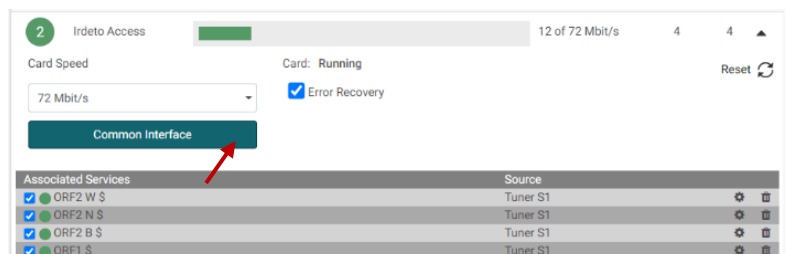

Please refer to the user guides of the CA modules and smart cards you have inserted for further information.

### 5.11.4 Reset CAM


If the CA module malfunctions, click the Reset CAM button to reboot the CA module. When a CA module is reset, the signal transmission is interrupted for all the services associated with that CA module.

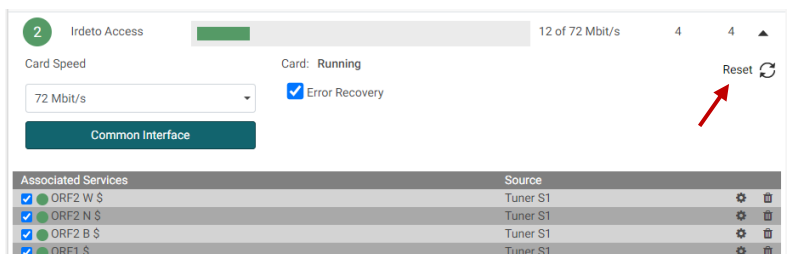

## 5.12 Scrambler

The TDCh & TDmH offer option for scrambling of services. The scrambler feature is not available for all variants. In general only variants with CI slot offers scramble feature. Pro:Idiom scrambling feature requires special variants. See section “3.4 Technical data” for variants vs. scrambler option information.

Variants with scrambler feature have a Scrambler tab in the Service Tool.

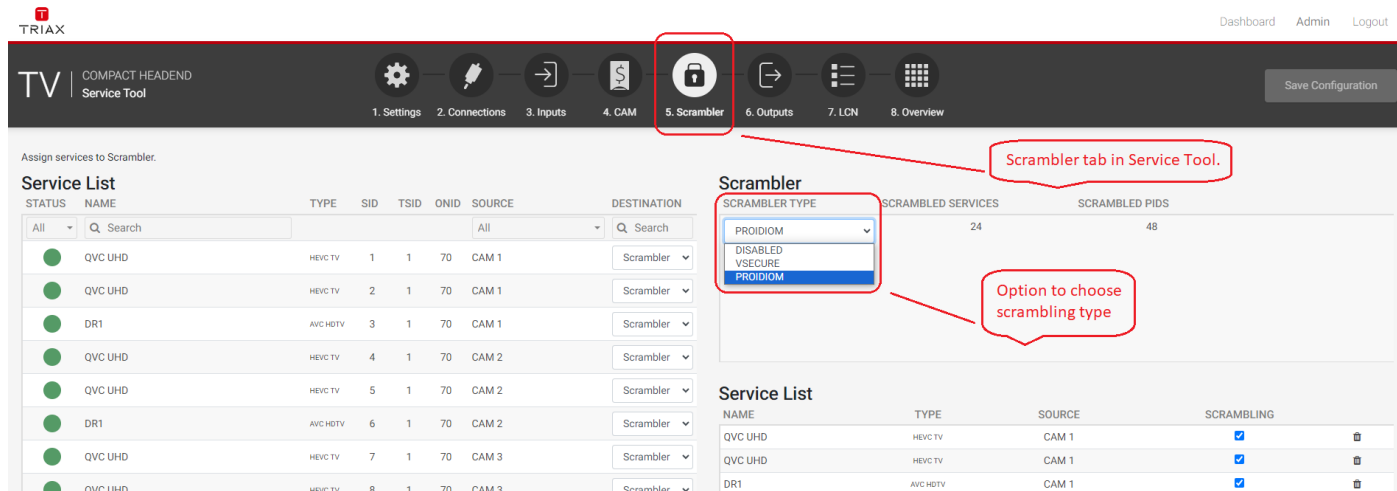

Assign services to Scrambler.

**Service List**

STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
●	QVC UHD	HEVC TV	1	1	70	CAM 1	Scrambler
●	QVC UHD	HEVC TV	2	1	70	CAM 1	Scrambler
●	DR1	AVC HDTV	3	1	70	CAM 1	Scrambler
●	QVC UHD	HEVC TV	4	1	70	CAM 2	Scrambler
●	QVC UHD	HEVC TV	5	1	70	CAM 2	Scrambler
●	DR1	AVC HDTV	6	1	70	CAM 2	Scrambler
●	QVC UHD	HEVC TV	7	1	70	CAM 3	Scrambler
●	QVC UHD	HEVC TV	8	1	70	CAM 3	Scrambler

**Scrambler**

SCRAMBLER TYPE: PROIDIOM (selected)  
 SCRAMBLED SERVICES: 24  
 SCRAMBLED PIDS: 48


**Service List**

NAME	TYPE	SOURCE	SCRAMBLING
QVC UHD	HEVC TV	CAM 1	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 1	<input checked="" type="checkbox"/>
DR1	AVC HDTV	CAM 1	<input checked="" type="checkbox"/>

At the Scrambler page the Scrambler type can be chosen. At default it is disabled.

When a Scrambler type is selected and required license/variant is meet, then services can be select for the scrambler. The selected services will be listed in the Service List.

At the Service List each service can be set to scrambling (default). If this is disabled the service will not be scrambled. This feature is primarily for troubleshooting purpose.

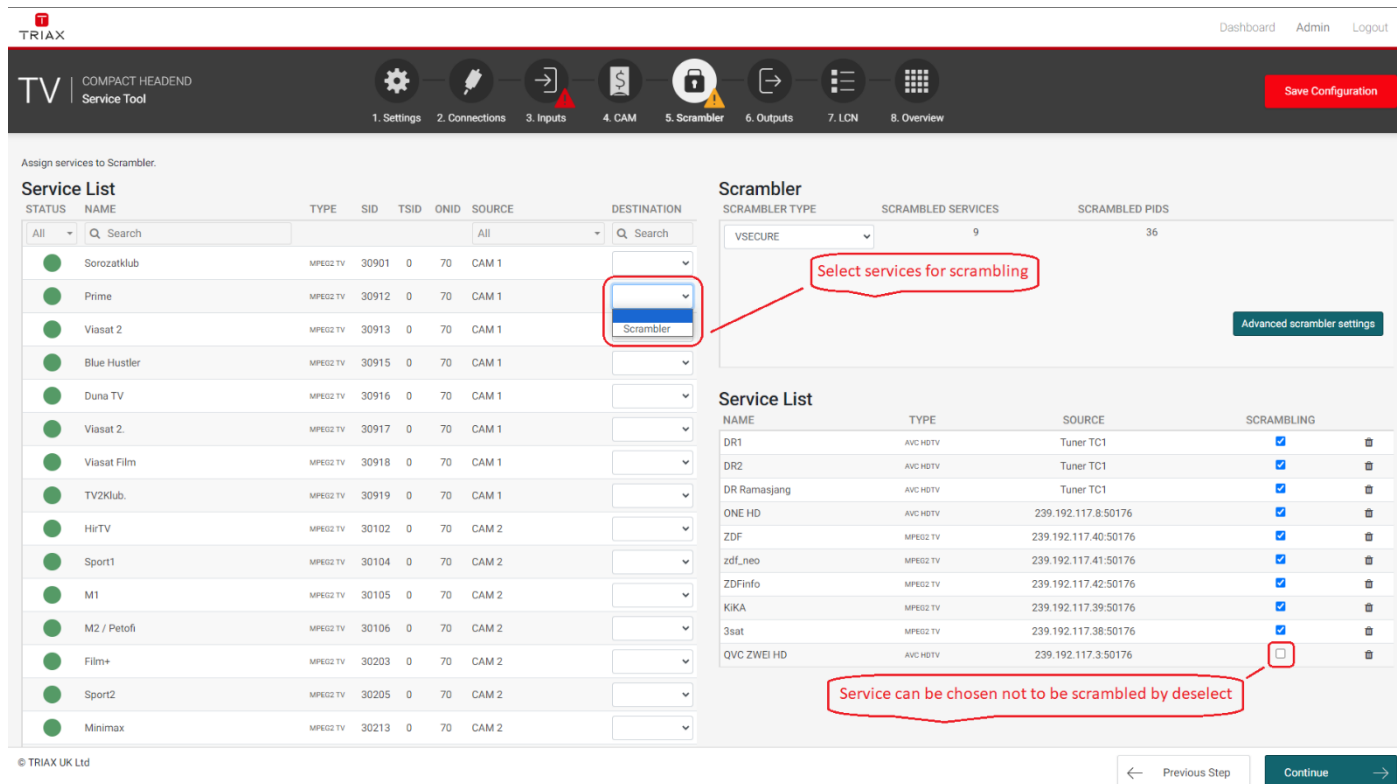

Assign services to Scrambler.

**Service List**

STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
●	Sorozatklub	MPEG2 TV	30901	0	70	CAM 1	Scrambler
●	Prime	MPEG2 TV	30912	0	70	CAM 1	Scrambler
●	Viasat 2	MPEG2 TV	30913	0	70	CAM 1	Scrambler
●	Blue Hustler	MPEG2 TV	30915	0	70	CAM 1	Scrambler
●	Duna TV	MPEG2 TV	30916	0	70	CAM 1	Scrambler
●	Viasat 2.	MPEG2 TV	30917	0	70	CAM 1	Scrambler
●	Viasat Film	MPEG2 TV	30918	0	70	CAM 1	Scrambler
●	TV2Klub.	MPEG2 TV	30919	0	70	CAM 1	Scrambler
●	HirTV	MPEG2 TV	30102	0	70	CAM 2	Scrambler
●	Sport1	MPEG2 TV	30104	0	70	CAM 2	Scrambler
●	M1	MPEG2 TV	30105	0	70	CAM 2	Scrambler
●	M2 / Petofi	MPEG2 TV	30106	0	70	CAM 2	Scrambler
●	Film+	MPEG2 TV	30203	0	70	CAM 2	Scrambler
●	Sport2	MPEG2 TV	30205	0	70	CAM 2	Scrambler
●	Minimax	MPEG2 TV	30213	0	70	CAM 2	Scrambler

**Scrambler**

SCRAMBLER TYPE: VSECURE (selected)  
 SCRAMBLED SERVICES: 9  
 SCRAMBLED PIDS: 36

**Service List**

NAME	TYPE	SOURCE	SCRAMBLING
DR1	AVC HDTV	Tuner TC1	<input checked="" type="checkbox"/>
DR2	AVC HDTV	Tuner TC1	<input checked="" type="checkbox"/>
DR Ramasjang	AVC HDTV	Tuner TC1	<input checked="" type="checkbox"/>
ONE HD	AVC HDTV	239.192.117.8:50176	<input checked="" type="checkbox"/>
ZDF	MPEG2 TV	239.192.117.40:50176	<input checked="" type="checkbox"/>
zdf_neo	MPEG2 TV	239.192.117.41:50176	<input checked="" type="checkbox"/>
ZDFinfo	MPEG2 TV	239.192.117.42:50176	<input checked="" type="checkbox"/>
KIKA	MPEG2 TV	239.192.117.39:50176	<input checked="" type="checkbox"/>
3sat	MPEG2 TV	239.192.117.38:50176	<input checked="" type="checkbox"/>
QVC ZWEI HD	AVC HDTV	239.192.117.3:50176	<input type="checkbox"/>

### 5.12.1 VSecure Scrambler

VSecure Scrambler works with Philips TV sets and VSecure CA modules.  
The VSecure Scrambler feature requires a license.

Only TV sets and CA modules with scrambling key are able to descramble. The scrambling key must be distributed to the TV sets and CA modules. This is done via following steps:

1. Collect ID from each TV set in a vsecert.txt file.
2. Upload the vsecert.txt file, containing the collected IDs, to the headend via the “Generate vseckey.txt file” button in the “Advanced scrambler settings” page reached via the "Advanced scrambler settings" button.
3. Distribute the scrambling key to the TV sets via the vseckey.txt file.

TRIAX

COMPACT HEADEND  
Service Tool

1. Settings

2. Connections

3. Inputs

4. CAM

5. Scrambler

6. Outputs

7. LCN

8. Overview

Save Configuration

Assign services to Scrambler.

Service List

STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
All	Q Search					All	Q Search
●	Sorozatklub	MPEG2 TV	30901	0	70	CAM 1	
●	Prime	MPEG2 TV	30912	0	70	CAM 1	
●	Viasat 2	MPEG2 TV	30913	0	70	CAM 1	
●	Blue Hustler	MPEG2 TV	30915	0	70	CAM 1	
●	Duna TV	MPEG2 TV	30916	0	70	CAM 1	
●	Viasat 2.	MPEG2 TV	30917	0	70	CAM 1	
●	Viasat Film	MPEG2 TV	30918	0	70	CAM 1	
●	TV2Klub.	MPEG2 TV	30919	0	70	CAM 1	
●	HirTV	MPEG2 TV	30102	0	70	CAM 2	
●	Sport1	MPEG2 TV	30104	0	70	CAM 2	
●	M1	MPEG2 TV	30105	0	70	CAM 2	
●	M2 / Petofi	MPEG2 TV	30106	0	70	CAM 2	
●	Film+	MPEG2 TV	30203	0	70	CAM 2	

Scrambler

SCRAMBLER TYPE  
VSECURE

SCRAMBLED SERVICES  
10

SCRAMBLED PIDS  
38

Select VSecure scrambler opens for Advanced scrambler settings , used for distribution of scrambling key.

Advanced scrambler settings

Service List

NAME	TYPE	SOURCE	SCRAMBLING
DR1	AVC HDTV	Tuner TC1	<input checked="" type="checkbox"/>
DR2	AVC HDTV	Tuner TC1	<input checked="" type="checkbox"/>
DR Ramasjang	AVC HDTV	Tuner TC1	<input checked="" type="checkbox"/>
ONE HD	AVC HDTV	239.192.117.8:50176	<input checked="" type="checkbox"/>
ZDF	MPEG2 TV	239.192.117.40:50176	<input checked="" type="checkbox"/>
zdf_neo	MPEG2 TV	239.192.117.41:50176	<input checked="" type="checkbox"/>
ZDFinfo	MPEG2 TV	239.192.117.42:50176	<input checked="" type="checkbox"/>
KIKA	MPEG2 TV	239.192.117.39:50176	<input checked="" type="checkbox"/>
3sat	MPEG2 TV	239.192.117.38:50176	<input checked="" type="checkbox"/>
QVC ZWEI HD	AVC HDTV	239.192.117.3:50176	<input checked="" type="checkbox"/>

Advanced scrambler settings

VSecure settings

SCRAMBLING KEY INFORMATION

Keys generated date:  
2024-03-14 - 10:12

CHANGE SCRAMBLING KEY

Regenerate Key

Regenerate Key will generate and activate a new Scrambling key.  
**WARNING!** The new generated Scrambling Key must be given to each VSecure clients, like all TV sets, STB, CA modules, etc...

Reset Key

Reset Key will activate the first generated Scrambling Key for this system.

DISTRIBUTE SCRAMBLING KEY


Generate a vseckey.txt file by selecting the vsecert.txt containing public keys collected from TV sets etc.

vseckey.txt will be downloaded after completion.

Generate vseckey.txt file


Status: IDLE  
Date for key used: -

Close



### 5.12.2 Pro:Idiom Scrambler

Pro:Idiom Scrambler works with LG TV sets. Only LG TV sets, supporting Pro:Idiom, can descramble the scrambled services. Pro:Idiom Scrambler setup is very simple - just select services to be scrambled as described in section 5.12 Scrambl.

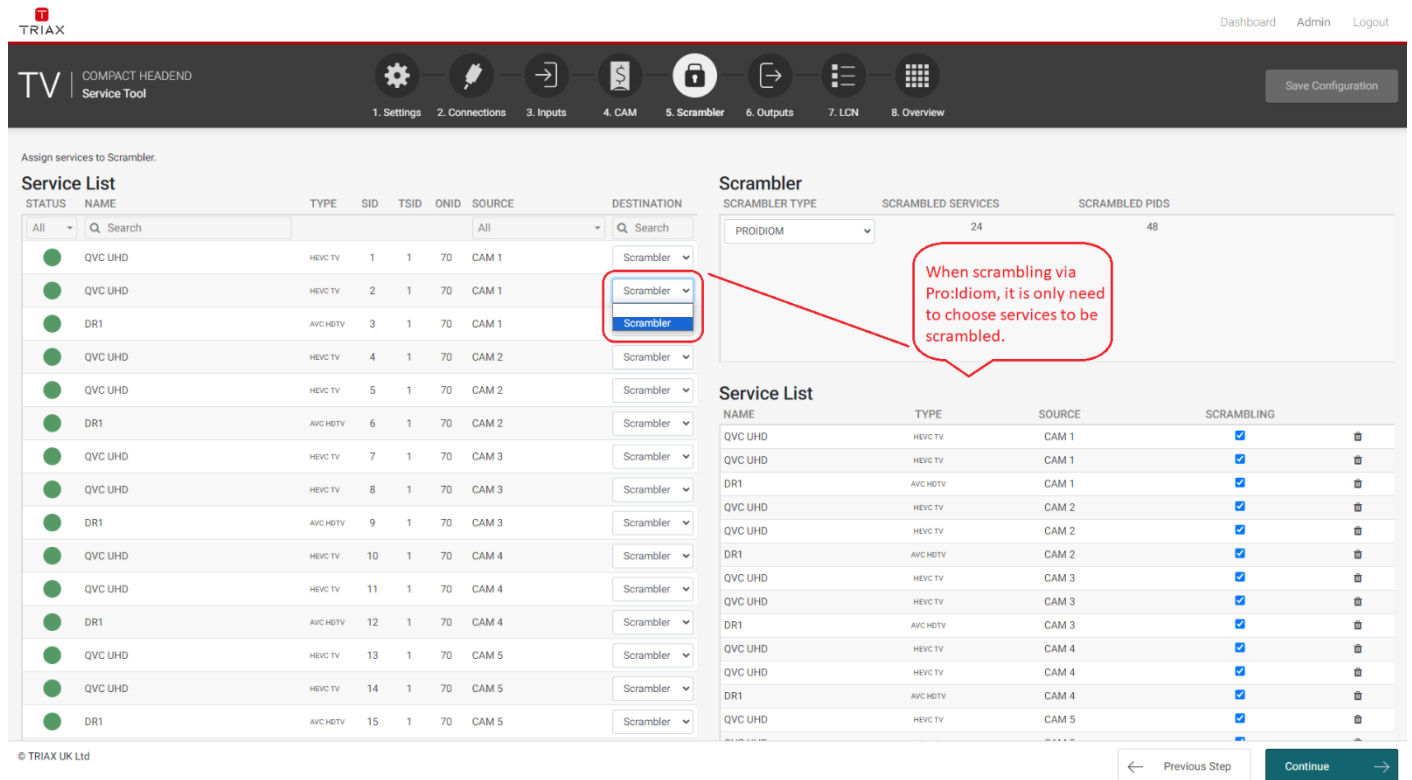

Assign services to Scrambler.

**Service List**

STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
All	QVC UHD	HEVC TV	1	1	70	CAM 1	Scrambler
All	QVC UHD	HEVC TV	2	1	70	CAM 1	Scrambler
All	DR1	AVC HDTV	3	1	70	CAM 1	Scrambler
All	QVC UHD	HEVC TV	4	1	70	CAM 2	Scrambler
All	QVC UHD	HEVC TV	5	1	70	CAM 2	Scrambler
All	DR1	AVC HDTV	6	1	70	CAM 2	Scrambler
All	QVC UHD	HEVC TV	7	1	70	CAM 3	Scrambler
All	QVC UHD	HEVC TV	8	1	70	CAM 3	Scrambler
All	DR1	AVC HDTV	9	1	70	CAM 3	Scrambler
All	QVC UHD	HEVC TV	10	1	70	CAM 4	Scrambler
All	QVC UHD	HEVC TV	11	1	70	CAM 4	Scrambler
All	DR1	AVC HDTV	12	1	70	CAM 4	Scrambler
All	QVC UHD	HEVC TV	13	1	70	CAM 5	Scrambler
All	QVC UHD	HEVC TV	14	1	70	CAM 5	Scrambler
All	DR1	AVC HDTV	15	1	70	CAM 5	Scrambler

**Scrambler**

SCRAMBLER TYPE: PROIDIOM

SCRAMBLED SERVICES: 24

SCRAMBLED PIDS: 48

**Service List**


NAME	TYPE	SOURCE	SCRAMBLING
QVC UHD	HEVC TV	CAM 1	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 1	<input checked="" type="checkbox"/>
DR1	AVC HDTV	CAM 1	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 2	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 2	<input checked="" type="checkbox"/>
DR1	AVC HDTV	CAM 2	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 3	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 3	<input checked="" type="checkbox"/>
DR1	AVC HDTV	CAM 3	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 4	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 4	<input checked="" type="checkbox"/>
DR1	AVC HDTV	CAM 4	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 5	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 5	<input checked="" type="checkbox"/>
DR1	AVC HDTV	CAM 5	<input checked="" type="checkbox"/>
QVC UHD	HEVC TV	CAM 5	<input checked="" type="checkbox"/>

© TRIAX UK Ltd

Previous Step Continue

### 5.12.3 No scrambler license

If no scrambler license exist at the system, a warning including information will be issued.

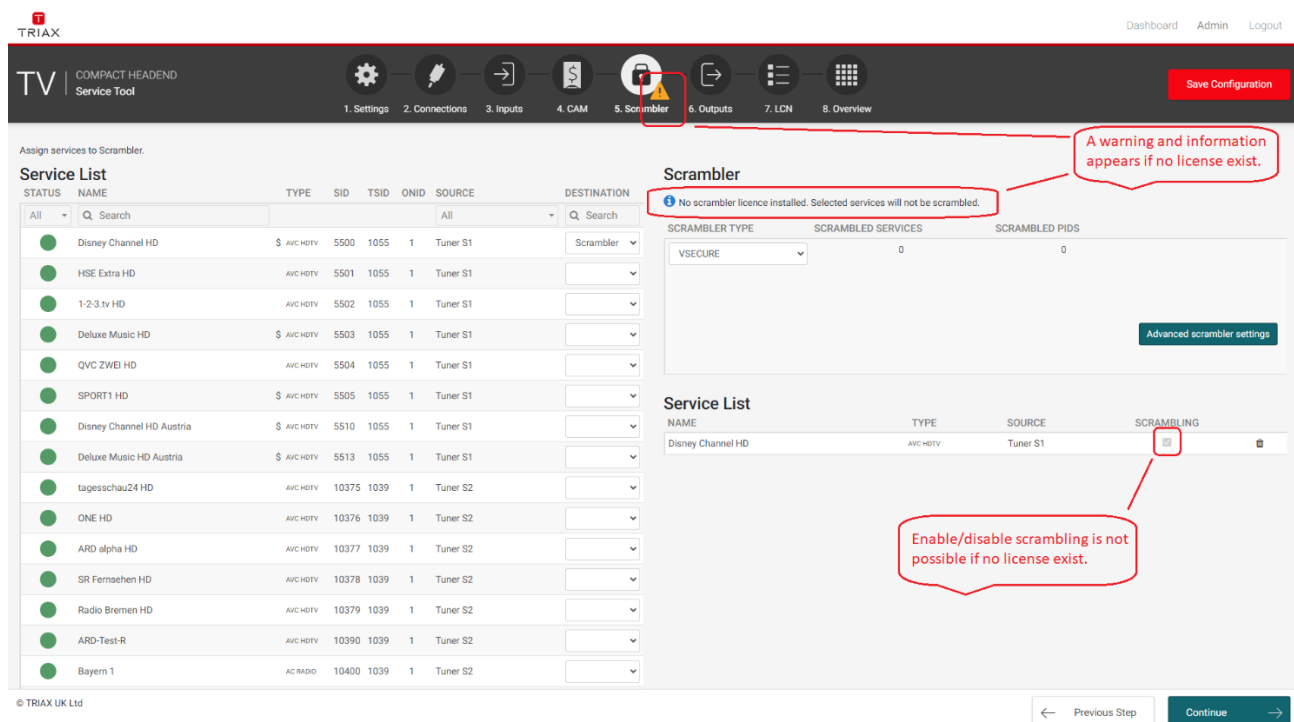

Assign services to Scrambler.

**Service List**

STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
All	Disney Channel HD	AVC HDTV	5500	1055	1	Tuner S1	Scrambler
All	HSE Extra HD	AVC HDTV	5501	1055	1	Tuner S1	
All	1-2-3.tv HD	AVC HDTV	5502	1055	1	Tuner S1	
All	Deluxe Music HD	AVC HDTV	5503	1055	1	Tuner S1	
All	QVC ZWEI HD	AVC HDTV	5504	1055	1	Tuner S1	
All	SPORT1 HD	AVC HDTV	5505	1055	1	Tuner S1	
All	Disney Channel HD Austria	AVC HDTV	5510	1055	1	Tuner S1	
All	Deluxe Music HD Austria	AVC HDTV	5513	1055	1	Tuner S1	
All	tagesschau24 HD	AVC HDTV	10375	1039	1	Tuner S2	
All	ONE HD	AVC HDTV	10376	1039	1	Tuner S2	
All	ARD alpha HD	AVC HDTV	10377	1039	1	Tuner S2	
All	SR Fernsehen HD	AVC HDTV	10378	1039	1	Tuner S2	
All	Radio Bremen HD	AVC HDTV	10379	1039	1	Tuner S2	
All	ARD-Test-R	AVC HDTV	10390	1039	1	Tuner S2	
All	Bayern 1	AC RADIO	10400	1039	1	Tuner S2	

**Scrambler**

No scrambler licence installed. Selected services will not be scrambled.

SCRAMBLER TYPE: VSECURE

SCRAMBLED SERVICES: 0

SCRAMBLED PIDS: 0

**Service List**

NAME	TYPE	SOURCE	SCRAMBLING
Disney Channel HD	AVC HDTV	Tuner S1	<input type="checkbox"/>

© TRIAX UK Ltd

Previous Step Continue


## 5.13 RF Outputs

The Output Tab is for assigning services to the RF output channels and to the IPTV addresses.

**Note:**

In most models the output modulation can be changed between QAM and COFDM. Select the required output modulation before you start to configure the TDcH & TdMh.

For changing the output modulation, please see 5.3.6 Output Modulation.

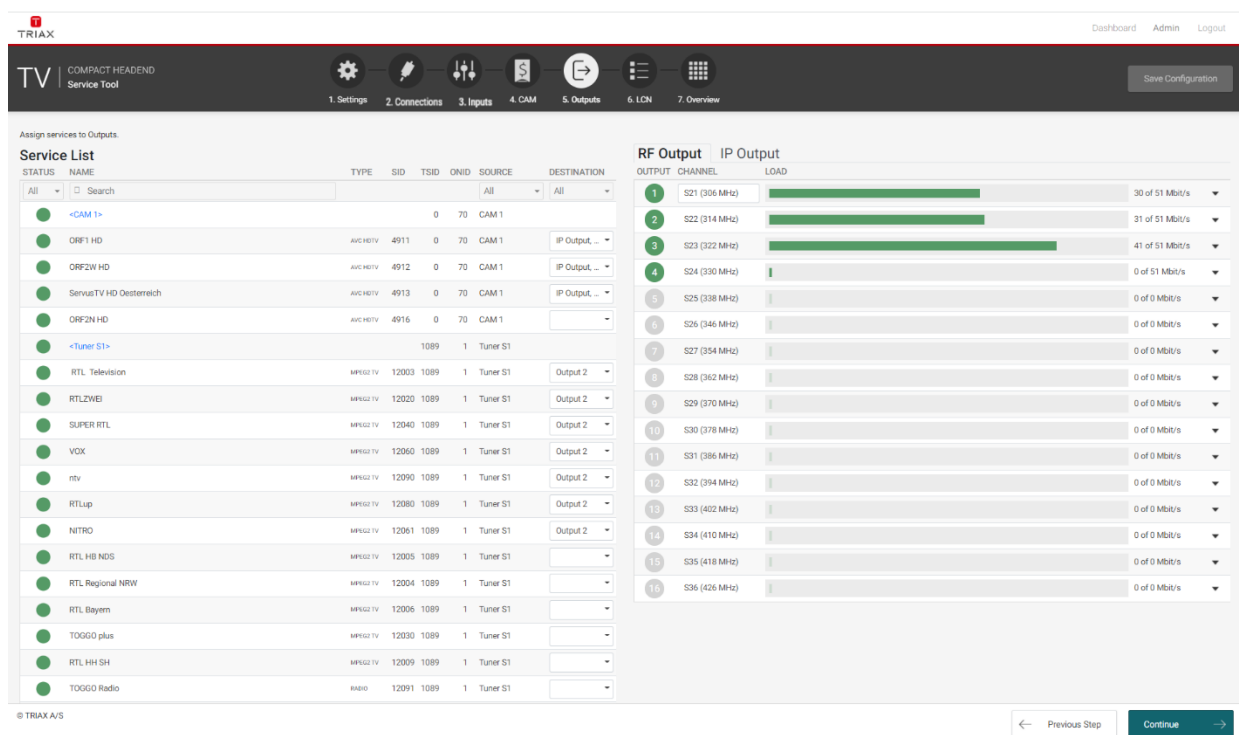

**Service List**

STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
All	<CAM 1>		0	70	CAM 1		All
	ORF1 HD	AUC HD TV	4911	0	70	CAM 1	IP Output, ...
	ORF2W HD	AUC HD TV	4912	0	70	CAM 1	IP Output, ...
	ServusTV HD Osterreich	AUC HD TV	4913	0	70	CAM 1	IP Output, ...
	ORF2N HD	AUC HD TV	4916	0	70	CAM 1	
	<Tuner S1>		1089	1	Tuner S1		
	RTL Television	MPG2 TV	12003	1089	1	Tuner S1	Output 2
	RTLZwei	MPG2 TV	12020	1089	1	Tuner S1	Output 2
	SUPER RTL	MPG2 TV	12040	1089	1	Tuner S1	Output 2
	VOX	MPG2 TV	12060	1089	1	Tuner S1	Output 2
	rti	MPG2 TV	12090	1089	1	Tuner S1	Output 2
	RTLup	MPG2 TV	12080	1089	1	Tuner S1	Output 2
	NITRO	MPG2 TV	12061	1089	1	Tuner S1	Output 2
	RTL HD NDS	MPG2 TV	12005	1089	1	Tuner S1	
	RTL Regional NRW	MPG2 TV	12004	1089	1	Tuner S1	
	RTL Bayern	MPG2 TV	12006	1089	1	Tuner S1	
	TOGG0 plus	MPG2 TV	12030	1089	1	Tuner S1	
	RTL HH SH	MPG2 TV	12009	1089	1	Tuner S1	
	TOGG0 Radio	RADIO	12091	1089	1	Tuner S1	

**RF Output**

OUTPUT	CHANNEL	LOAD
1	S21 (306 MHz)	30 of 51 Mbit/s
2	S22 (314 MHz)	31 of 51 Mbit/s
3	S23 (322 MHz)	41 of 51 Mbit/s
4	S24 (330 MHz)	0 of 51 Mbit/s
5	S25 (338 MHz)	0 of 0 Mbit/s
6	S26 (346 MHz)	0 of 0 Mbit/s
7	S27 (354 MHz)	0 of 0 Mbit/s
8	S28 (362 MHz)	0 of 0 Mbit/s
9	S29 (370 MHz)	0 of 0 Mbit/s
10	S30 (378 MHz)	0 of 0 Mbit/s
11	S31 (386 MHz)	0 of 0 Mbit/s
12	S32 (394 MHz)	0 of 0 Mbit/s
13	S33 (402 MHz)	0 of 0 Mbit/s
14	S34 (410 MHz)	0 of 0 Mbit/s
15	S35 (418 MHz)	0 of 0 Mbit/s
16	S36 (426 MHz)	0 of 0 Mbit/s


© TRIAX A/S

Previous Step Continue

The first time the Service Tool displays the configuration window for the output in a new configuration, the fields in the window will display default values and/or be empty, and the output will be disabled.

### 5.13.1 Channel plan

Before starting the Output configuration please be sure that the channel plan is set in the Settings folder!

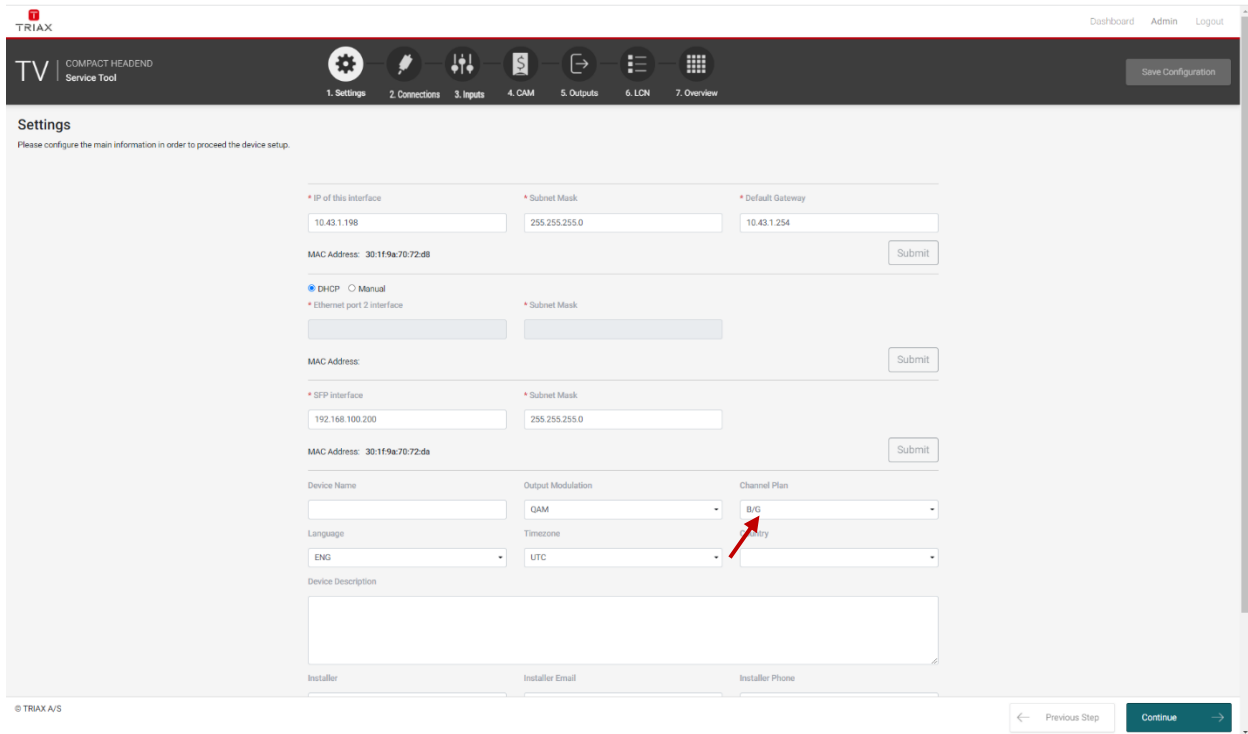

**Settings**  
Please configure the main information in order to proceed the device setup.

**IP of this interface** **Subnet Mask** **Default Gateway**

10.43.1.198 255.255.255.0 10.43.1.254

MAC Address: 30:1f9a:70:72:d8

☒ DHCP ☐ Manual

**Ethernet port 1/2 interface** **Subnet Mask**

MAC Address:

**SFP interface** **Subnet Mask**

192.168.100.200 255.255.255.0

MAC Address: 30:1f9a:70:72:da

Device Name **Output Modulation** **Channel Plan**

QAM B/G

Language **Timezone**

ENG UTC

Device Description

Installer  Installer Email  Installer Phone

© TRIAX A/S

### 5.13.2 Select service

**Note:**

Services can be assigned to an output channel in direct conversion or as a new multiplex. In the direct conversion a full input transponder is assigned to an output channel. If a new multiplex is made, single services can be chosen from independent input transponders.

**Direct channel conversion / Transparent mode:**

Select under DESTINATION for each Input the output you would like to use the direct conversion function.

**Note:**

All services below this input will be shown as assigned to the selected outputs and cannot be used for other outputs!

Please note that services allocated in direct conversion to an output are not shown in the LCN table. Only services allocated in new multiplexes are shown in the LCN list!

STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
All	Q Search					All	All
	<Tuner TC1>			31	3	Tuner TC1	Output 1
	BR Fernsehen Süd HD	AVC HDTV	10325	31	3	Tuner TC1	Output 1 ✓
	NDR FS SH HD	AVC HDTV	10330	31	3	Tuner TC1	Output 2
	PHOENIX HD	AVC HDTV	10331	31	3	Tuner TC1	Output 3
	Welt der Wunder	MPEG2 TV	13103	31	3	Tuner TC1	Output 4
	<Tuner S1>			1007	1	Tuner S1	Output 5
	ORF1 HD	\$ AVC HDTV	4911	1007	1	Tuner S1	Output 6
	ORF2W HD	\$ AVC HDTV	4912	1007	1	Tuner S1	Output 7
	ServusTV HD Osterreich	\$ AVC HDTV	4913	1007	1	Tuner S1	Output 8
	ServusTV HD Deutschland	AVC HDTV	4914	1007	1	Tuner S1	Output 9
	ORF2N HD	\$ AVC HDTV	4916	1007	1	Tuner S1	Output 10
	OE3.	RADIO	4920	1007	1	Tuner S1	Output 11

**New multiplex / Service mode:**

If you would like to make a new output multiplex you can select individual services from different inputs for each output.

**Note:**

Please ensure that in both variations the output bandwidth is not overloaded!

STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
All	Q Search					All	All
	<Tuner S1>			1055	1	Tuner S1	
	Disney Channel HD	\$ AVC HDTV	5500	1055	1	Tuner S1	
	HSE Extra HD	AVC HDTV	5501	1055	1	Tuner S1	IP Output, ...
	1-2-3.tv HD	AVC HDTV	5502	1055	1	Tuner S1	IP Output, ...
	Deluxe Music HD	\$ AVC HDTV	5503	1055	1	Tuner S1	
	QVC ZWEI HD	AVC HDTV	5504	1055	1	Tuner S1	IP Output, ...
	SPORT 1 HD	\$ AVC HDTV	5505	1055	1	Tuner S1	New IP output 239.192.117.3:50176 ✓
	Disney Channel HD Austria	\$ AVC HDTV	5510	1055	1	Tuner S1	Output 1 ✓
	Deluxe Music HD Austria	\$ AVC HDTV	5513	1055	1	Tuner S1	Output 2
	<Tuner S2>			1039	1	Tuner S2	Output 3
	tagesschau24 HD	AVC HDTV	10375	1039	1	Tuner S2	Output 4
	ONE HD	AVC HDTV	10376	1039	1	Tuner S2	Output 5
	ARD alpha HD	AVC HDTV	10377	1039	1	Tuner S2	Output 6
	SR Fernsehen HD	AVC HDTV	10378	1039	1	Tuner S2	Output 7

© TRIAX UK Ltd

### 5.13.3 QAM Modulation

#### Enable All RF Outputs

You can quickly enable or disable all RF outputs by this setting.

#### QAM output frequency:

You can configure a QAM output frequency by using the specifications of the channel plan or by entering a frequency manually.

#### Using the channel plan definitions:

Open the drop-down list with the predefined channels and select the channel you want to use.

#### Note:

The Channel is only needed for Output 1 – all others are set automatically!

RF Output		IP Output
<input checked="" type="checkbox"/> Enable All RF Outputs		
OUTPUT	CHANNEL	LOAD
1	S21 (306 MHz)	32 of 51 Mbit/s
2	S21 (306 MHz)	37 of 51 Mbit/s
3	S22 (314 MHz)	33 of 51 Mbit/s
4	S23 (322 MHz)	39 of 51 Mbit/s
5	S24 (330 MHz)	31 of 51 Mbit/s
6	S25 (338 MHz)	41 of 51 Mbit/s
7	S26 (346 MHz)	44 of 51 Mbit/s
8	S27 (354 MHz)	1 of 51 Mbit/s
9	S28 (362 MHz)	37 of 51 Mbit/s
10	S29 (370 MHz)	7 of 51 Mbit/s
11	S30 (378 MHz)	33 of 51 Mbit/s
12	S31 (386 MHz)	0 of 51 Mbit/s
13	S32 (394 MHz)	0 of 51 Mbit/s
14	S33 (402 MHz)	0 of 51 Mbit/s
15	S34 (410 MHz)	0 of 51 Mbit/s
16	S35 (418 MHz)	41 of 51 Mbit/s
	S36 (426 MHz)	

#### Enter a frequency manually:

Click into the frequency field and enter the frequency directly. Enter the desired frequency in MHz in the Frequency field.

#### Note:

The Channel is only needed for Output 1 all others are set automatically!

Open the detailed output configuration menu with the extend button.

## Constellation:

To select which QAM mode to use, open the dropdown list and select the QAM mode you want to use.

## Symbol rate:

Enter the desired symbol rate (from 3150 to 7200 kS) in the Symbol rate field.

## Level correction:

RF output level correction can be set in the first output channel for all output channels between 0 and -16 dB.

## Enable Output:


If you want to enable this channel, click the Enable Output checkbox.

## Note:


If the output is disabled, then there will be no transport stream or carrier present at this output. The services selected for this output will still be seen as configured in the system. The information about the services at this output will still exist via EIT\_other, SDT\_other and NIT\_other!

## LOAD monitor

The payload monitor is a real time monitor, which visually indicates the amount of data currently being transmitted.

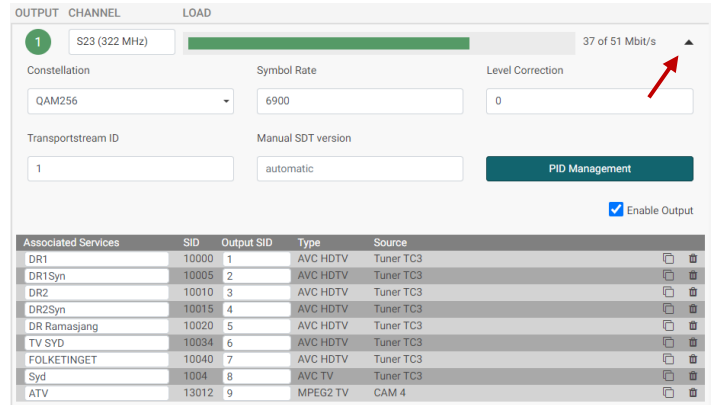

Associated Services	SID	Output SID	Type	Source
DR1	10000	1	AVC HDTV	Tuner TC3
DR1Syn	10005	2	AVC HDTV	Tuner TC3
DR2	10010	3	AVC HDTV	Tuner TC3
DR2Syn	10015	4	AVC HDTV	Tuner TC3
DR Ramasjang	10020	5	AVC HDTV	Tuner TC3
TV SYD	10034	6	AVC HDTV	Tuner TC3
FOLKETINGET	10040	7	AVC HDTV	Tuner TC3
Syd	1004	8	AVC TV	Tuner TC3
ATV	13012	9	MPEG2 TV	CAM 4

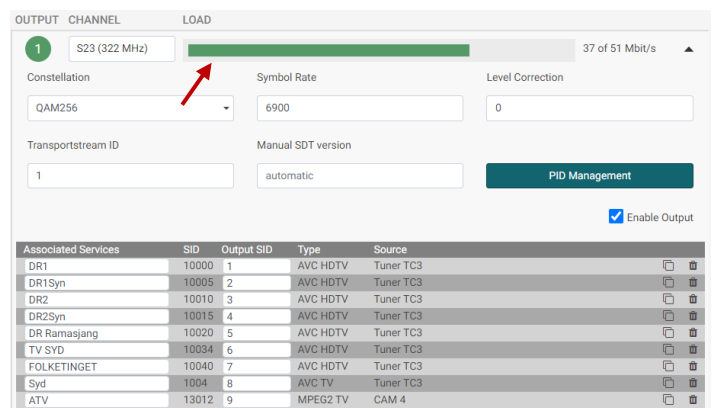

Associated Services	SID	Output SID	Type	Source
DR1	10000	1	AVC HDTV	Tuner TC3
DR1Syn	10005	2	AVC HDTV	Tuner TC3
DR2	10010	3	AVC HDTV	Tuner TC3
DR2Syn	10015	4	AVC HDTV	Tuner TC3
DR Ramasjang	10020	5	AVC HDTV	Tuner TC3
TV SYD	10034	6	AVC HDTV	Tuner TC3
FOLKETINGET	10040	7	AVC HDTV	Tuner TC3
Syd	1004	8	AVC TV	Tuner TC3
ATV	13012	9	MPEG2 TV	CAM 4

### 5.13.4 COFDM Modulation

#### CHANNEL

You can configure a COFDM output frequency by using the specifications of the channel plan or by entering a frequency manually.

#### Using the channel plan definitions:

Open the drop-down list with the predefined channels and select the channel you want to use.

*Note:*


The Channel is only needed for Output 1 – all others are set automatically!

#### Enter a frequency manually:

Click into the frequency field and enter the frequency directly. Enter the desired frequency in MHz in the Frequency field.

*Note:*


The Channel is only needed for Output 1, all others are set automatically!

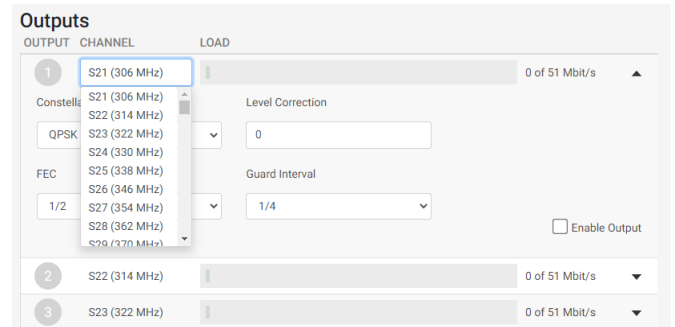

#### Constellation

To select which transmission mode to use, click the arrow to the right of the Transmission mode field to open the drop-down list with the modes you can choose from.

Select the transmission mode you want to use.

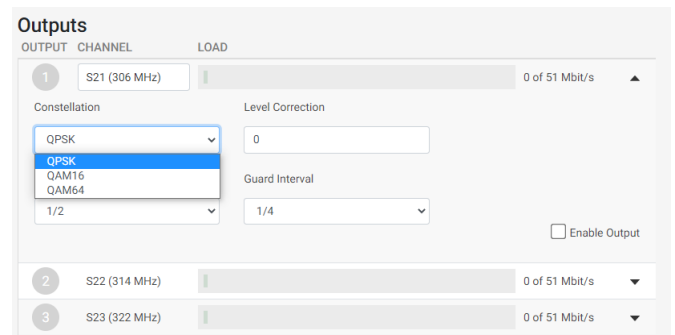


#### Level Correction:

RF output level correction can be set in the first output channel for all output channels between 0 and -16 dB.

#### FEC

To select which FEC rate to use, click the arrow to the right of the FEC field to open the drop-down list with the FEC rates you can choose from.

Select the FEC rate you want to use.

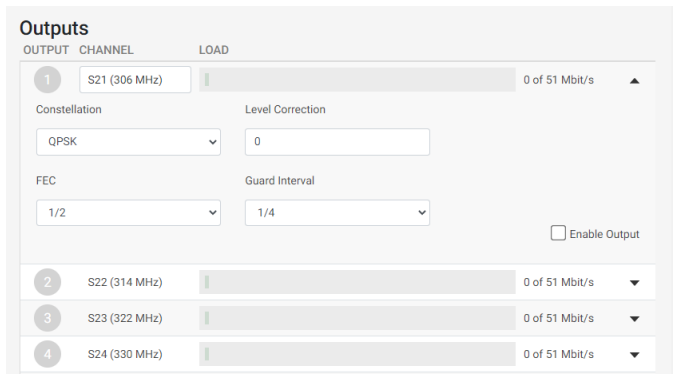

#### Guard Interval

To select which guard interval to use, click the arrow to the right of the Guard interval field to open the dropdown list with the intervals you can choose from.

Select the guard interval you want to use.

### Enable Output:

If you want to enable this channel, click the Enable Output checkbox.

### LOAD monitor

The payload monitor is a real time monitor, which visually indicates the amount of data that is currently being transmitted.

### 5.13.5 TSID and SID Management – RF Output

#### Manual SDT version

The SDT version will stay fixed to the configured value if the “Manual SDT version” is set.

The SDT version will automatically be increased by one if this configuration is not set and other configuration changes affect the SDT.

3

S23 (322 MHz)

32 of 51 Mbit/s

▼

4

S24 (330 MHz)

39 of 51 Mbit/s

▲

Constellation

Symbol Rate

Level Correction

QAM256

6900

0

Transportstream ID

Manual SDT version

103

automatic

PID Management

Enable Output

Associated Services	SID	Output SID	Type	Source	
3sat HD	11150	11150	AVC HDTV	Tuner S3	
KIKA HD	11160	11160	AVC HDTV	Tuner S3	
ZDFinfo HD	11170	11170	AVC HDTV	Tuner S3	

5

S25 (338 MHz)

31 of 51 Mbit/s

▼

#### Transport stream ID

In the field Transport stream ID you will find the actual used Transport stream ID.

If you would like to change this you can type a new value into the field.

#### Note:

If there is a conflict with another Transport stream using the same ID, the field and the ID number will have a red indication!

#### Output SID

In the field Output SID you will find the actual used Output SID.

If you would like to change this, you can type a new value into the field.

#### Note:

If there is a conflict with another Output using the same ID, the field and the ID number will have a red indication!

### 5.13.6 PID Management – RF Output

Pressing the PID Management button opens the PID management menu.

In PID Management window you will find the following information:

Service Name  
Output SID  
Stream Type  
Details like CAS ID, Audio type, etc.  
Original PID  
Selected YES/NO  
Conflicts  
FIXED PID  
Output PID

#### Filter PID's

By deselecting the filter check box you can deselect (filter) PID's.



This can be used if you would like to reduce audio or other information from the service.

#### Fixed PID

If you enter a PID in the “FIXED PID” field the PID will be changed to this setting.

#### Note:

If a PID is used twice there will be an error indication shown and the PID with the same value will be highlighted.


PID Management								
SERVICE	OUTPUT SID	STREAM TYPE	DETAILS	ORIGINAL PID	SELECTED	CONFLICT	FIXED PID	OUTPUT PID
ORF1 HD	4911	PMT		107				107
ORF1 HD	4911	ECM	CAS ID: 1608	120	<input checked="" type="checkbox"/>		122	120
ORF1 HD	4911	ECM	CAS ID: 1616	122	<input checked="" type="checkbox"/>			122
ORF1 HD	4911	ECM	CAS ID: 3477	270	<input checked="" type="checkbox"/>			270
ORF1 HD	4911	ECM	CAS ID: 3480	272	<input checked="" type="checkbox"/>			272
ORF1 HD	4911	ECM	CAS ID: 1762	320	<input checked="" type="checkbox"/>			320
ORF1 HD	4911	ECM	CAS ID: 1280	461	<input checked="" type="checkbox"/>			461
ORF1 HD	4911	ECM	CAS ID: 2445	470	<input checked="" type="checkbox"/>			470
ORF1 HD	4911	ECM	CAS ID: 2500	480	<input checked="" type="checkbox"/>			480
ORF1 HD	4911	ECM	CAS ID: 2444	490	<input checked="" type="checkbox"/>			490
ORF1 HD	4911	H264 Video (PCR)	AVC	1920	<input checked="" type="checkbox"/>			1920
ORF1 HD	4911	Private data	deu, AC3	1921	<input checked="" type="checkbox"/>			1921
ORF1 HD	4911	Private data	mis, AC3	1922	<input checked="" type="checkbox"/>			1922
ORF1 HD	4911	Teletext		1925	<input checked="" type="checkbox"/>			1925
ORF1 HD	4911	Teletext		1925	<input checked="" type="checkbox"/>			1925

### 5.13.7 Multiple services – RF Output

The TDcH & TDmH support sending out services multiple times.

This functionality can be used to send out the service with different audio languages.

This has the advantage that the services are available multiple times in the service list, so the customer can choose the service with the desired audio language by simply changing the channel. They do not have to use the audio function of the television.

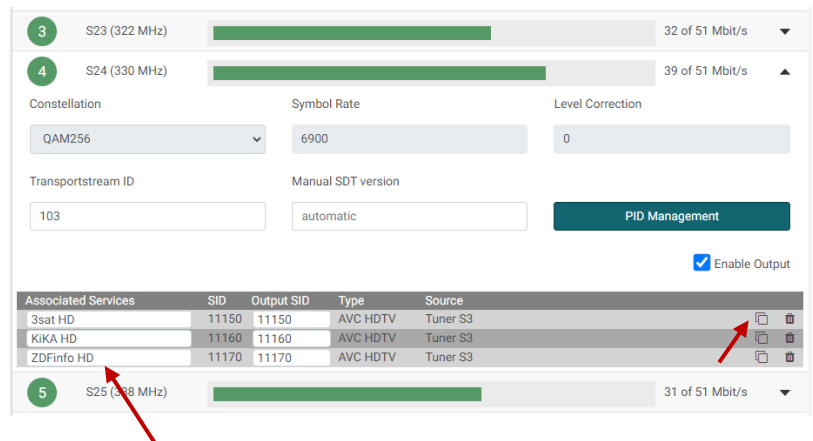

Associated Services	SID	Output SID	Type	Source
3sat HD	11150	11150	AVC HDTV	Tuner S3
KIKA HD	11160	11160	AVC HDTV	Tuner S3
ZDFinfo HD	11170	11170	AVC HDTV	Tuner S3

With this function it is also possible to make language packages in the channel plan so the services with the same languages are in one block in the channel list.

If you press the copy button the service will be added as a copy.

#### Note:

The common elements will only exist once in the stream, so this is not a one-to-one increase in the payload! Payload is only effected by the extra PMT and different elements like different audio languages.

### 5.13.8 Rename services – RF Output

The service name for any service, like a duplicated service, can be renamed. A service is renamed via the field below Associated Services.

### 5.13.9 Configure service type – RF Output

If the service is originating from a stream without SDT from an IP-input, then the service type will be unknown due to the missing SDT. The missing SDT will result in the service name being shown as “Unknown” in the *Type* field and it is possible to configure it. If you are in doubt then set the type to “MPEG 2 TV” for a TV service and “Radio” for a radio service.

## 5.14 IP Output

## 5.15 License

IP output licenses need to be purchased from TRIAX to enable the distribution of IP services through the TDcH & TDmH headend system.

Required license numbers:

Item No.:	418740	TDcH IP-out license
Item No.:	418751	TDmH IP-out 48 license

Licenses are activated using License handling in the Administration window.

## 5.16 Requirements

The TDcH & TDmH streams Multicast UPD/RTP SPTS streams out with 7 transport streams packets per IP packet.

*Note:*

The TDcH & TDmH headends system must be connected to a Gigabit network switch to receive and deliver IP services. The network switch must support IGMP version 2 / 3 and contain an adequate number of ports.

Cat 5e shielded or better network cables must be used.

## 5.17 Hardware


### Optional hardware:

A fibre-optic transceiver can be used instead of an RJ45 SFP transceiver. This is especially relevant for pre-existing optical installations, or for installations with high levels of interference and/or total cable lengths exceeding 100m. The fibre-optic transceiver must be ordered separately.

Item No.:	492086	SFP RJ45
Item No.:	492087	SFP Fiber 850nm EOLS-8512-MXX (500m)
Item No.:	492088	SFP Fiber 1310nm EOLS-1324-02XX (2km)

### 5.18 IPTV out configuration in GUI

Enter the configuration for IPTV out in the GUI by entering the *Output* tab in the panes and the *IP Output* sub-tab.

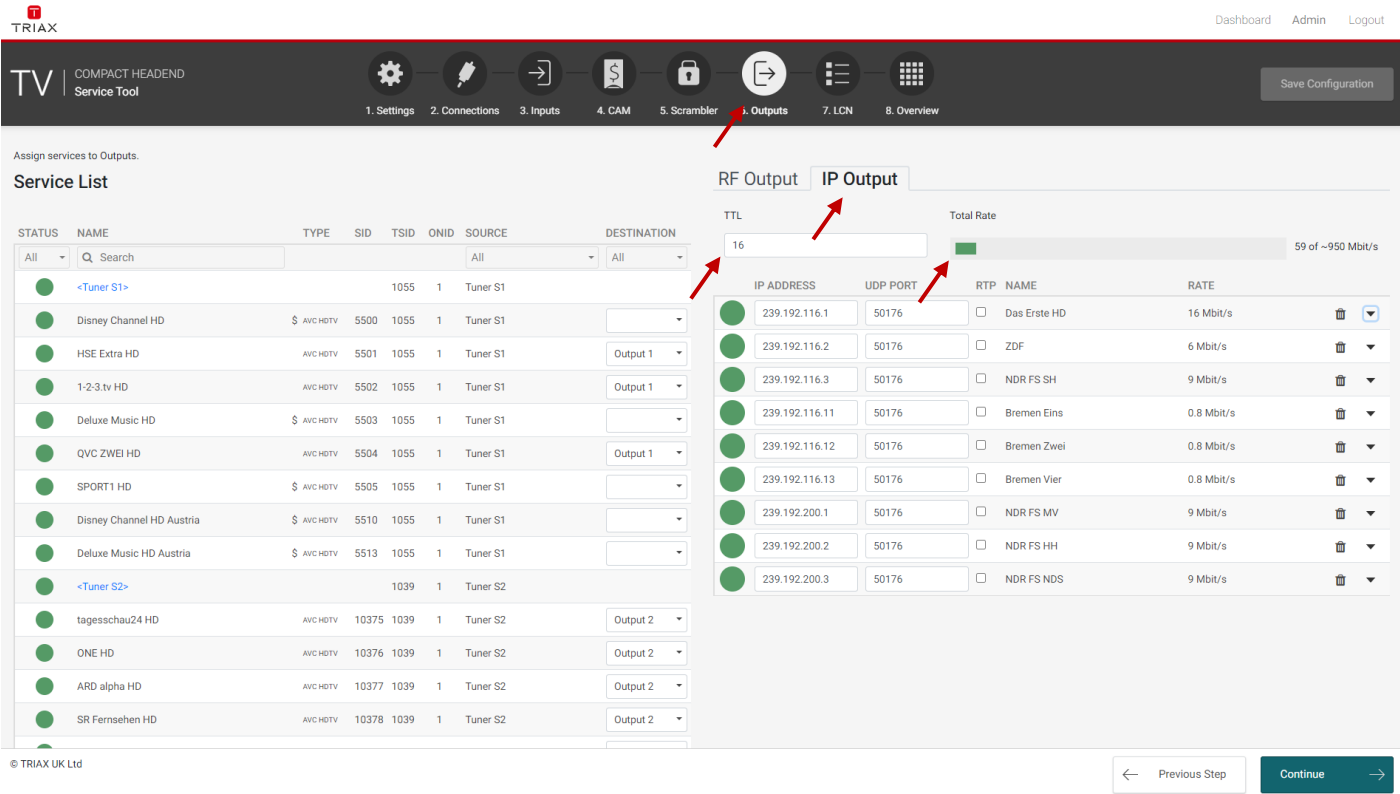

Assign services to Outputs.

**Service List**

STATUS	NAME	TYPE	SID	TSID	ONID	SOURCE	DESTINATION
All	Q Search					All	
●	<Tuner S1>			1055	1	Tuner S1	
●	Disney Channel HD	\$ AVC HDTV	5500	1055	1	Tuner S1	
●	HSE Extra HD	AVC HDTV	5501	1055	1	Tuner S1	Output 1
●	1-2-3.tv HD	AVC HDTV	5502	1055	1	Tuner S1	Output 1
●	Deluxe Music HD	\$ AVC HDTV	5503	1055	1	Tuner S1	
●	QVC ZWEI HD	AVC HDTV	5504	1055	1	Tuner S1	Output 1
●	SPORT1 HD	\$ AVC HDTV	5505	1055	1	Tuner S1	
●	Disney Channel HD Austria	\$ AVC HDTV	5510	1055	1	Tuner S1	
●	Deluxe Music HD Austria	\$ AVC HDTV	5513	1055	1	Tuner S1	
●	<Tuner S2>			1039	1	Tuner S2	
●	tagesschau24 HD	AVC HDTV	10375	1039	1	Tuner S2	Output 2
●	ONE HD	AVC HDTV	10376	1039	1	Tuner S2	Output 2
●	ARD alpha HD	AVC HDTV	10377	1039	1	Tuner S2	Output 2
●	SR Fernsehen HD	AVC HDTV	10378	1039	1	Tuner S2	Output 2

**RF Output** **IP Output**

TTL: 16

Total Rate: 59 of ~950 Mbit/s

IP ADDRESS	UDP PORT	RTP	NAME	RATE
239.192.116.1	50176	<input type="checkbox"/>	Das Erste HD	16 Mbit/s
239.192.116.2	50176	<input type="checkbox"/>	ZDF	6 Mbit/s
239.192.116.3	50176	<input type="checkbox"/>	NDR FS SH	9 Mbit/s
239.192.116.11	50176	<input type="checkbox"/>	Bremen Eins	0.8 Mbit/s
239.192.116.12	50176	<input type="checkbox"/>	Bremen Zwei	0.8 Mbit/s
239.192.116.13	50176	<input type="checkbox"/>	Bremen Vier	0.8 Mbit/s
239.192.200.1	50176	<input type="checkbox"/>	NDR FS MV	9 Mbit/s
239.192.200.2	50176	<input type="checkbox"/>	NDR FS HH	9 Mbit/s
239.192.200.3	50176	<input type="checkbox"/>	NDR FS NDS	9 Mbit/s

© TRIAX UK Ltd

Previous Step Continue

#### TTL

Time to live (TTL) or hop limit is a mechanism which limits the lifespan or lifetime of data in a computer or network. TTL may be implemented as a counter or timestamp attached to or embedded in the data. Once the prescribed event count or timespan has elapsed, data is discarded or revalidated. In computer networking, TTL prevents a data packet from circulating indefinitely. In computing applications, TTL is commonly used to improve the performance and manage the caching of data. Standard value is 16.

#### TOTAL RATE (LOAD monitor)


The payload monitor is a real time monitor, which visually indicates the amount of data that is currently being transmitted. The figure shows the total bandwidth of all IP-out services!

### Assign service to streaming at IPTV output:

Services can be assigned to an IPTV output.

Receive an IP stream by following the few steps below:

- 1) Select the *Outputs* tab in the panes.
- 2) Select the *IP Output* sub-tab.
- 3) Press the New IP output button for streaming a new IPTV out.
- 4) Specify the desired IP address and associated UDP port number.
- 5) System will automatically update the rate [Mbit/s] for the stream plus the total rate.

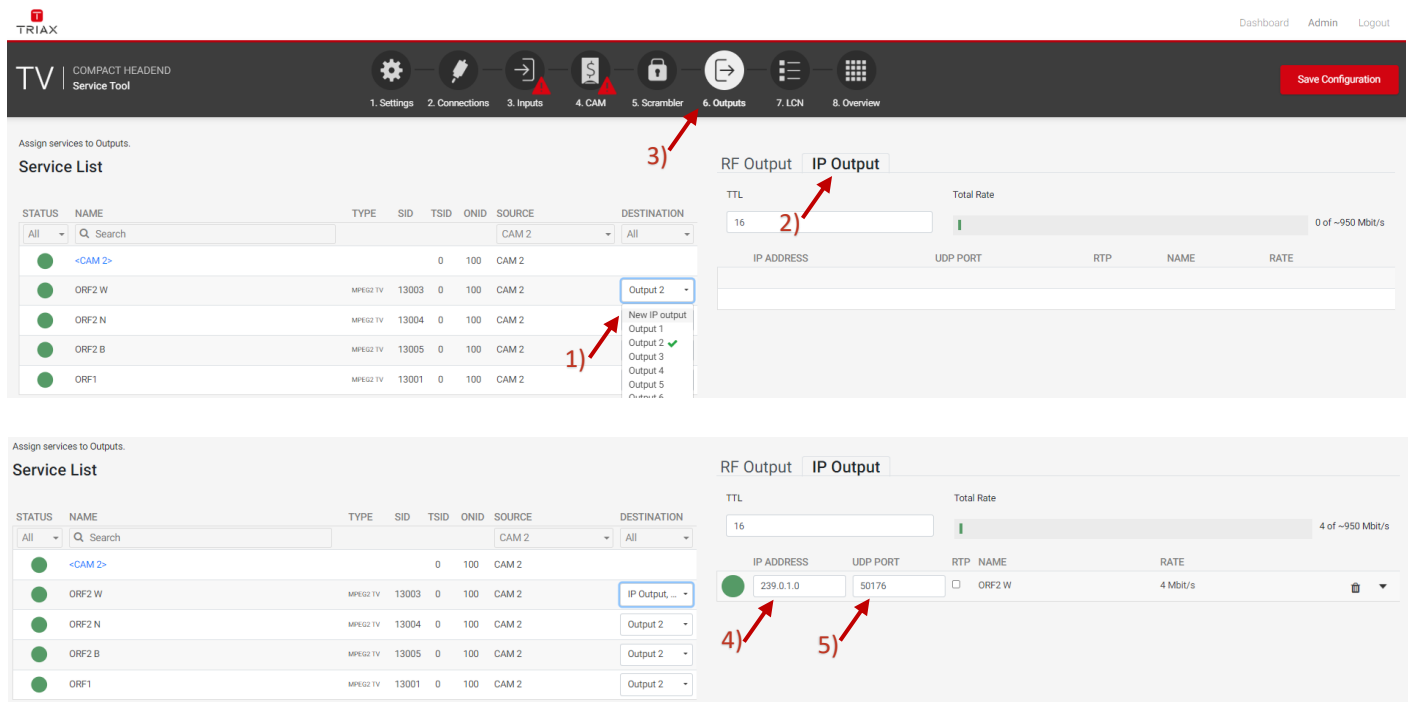

The screenshot displays the TRIAX Compact Headend Service Tool interface. The top navigation bar includes tabs for Settings, Connections, Inputs, CAM, Scrambler, Outputs, LCN, and Overview. The 'Outputs' tab is selected, and the 'IP Output' sub-tab is active. The 'Service List' table on the left shows services like <CAM 2>, ORF2 W, ORF2 N, ORF2 B, and ORF1. The 'Destination' column for these services is set to 'Output 2'. The 'New IP output' button is highlighted with a red arrow labeled '1)'. The 'IP Output' configuration panel on the right shows the 'TTL' set to 16 and the 'Total Rate' at 0 of ~950 Mbit/s. The 'IP ADDRESS' field is set to 239.0.1.0 and the 'UDP PORT' is 50176, both highlighted with red arrows labeled '4)' and '5)' respectively. The 'RTP' checkbox is checked, and the 'NAME' is 'ORF2 W' with a rate of 4 Mbit/s.

### Note:

Start the IP-out configuration by assigning the first services which should be sent out as IPTV service. Administrate the IP address. All following IPTV services will follow the IP address range by increasing the last number by 1.

### IP ADDRESS

Specifies the IP Address of an IPTV service. Enter a multicast IP address between 224.0.0.0 and 239.255.255.255 in the IP address field.


### UDP PORT

Enter the desired IP port number in the Port field within the range '1025 to '65535'.

### RTP

Select the RTP check box to enable Real-Time.

Open the detailed output configuration menu with the extend button.

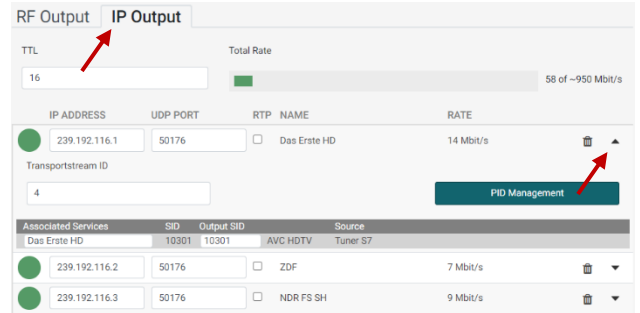

IP ADDRESS	UDP PORT	RTP NAME	RATE
239.192.116.1	50176	Das Erste HD	14 Mbit/s
239.192.116.2	50176	ZDF	7 Mbit/s
239.192.116.3	50176	NDR FS SH	9 Mbit/s

Associated Services	SID	Output SID	Source
Das Erste HD	10301	10301	AVC HDTV Tuner S7

### 5.18.1 TSID and SID Management – IP Output

#### Transport stream ID

In the field Transport stream ID you will find the actual used Transport stream ID.

If you would like to change this you can type a new value into the field.

*Note:*

If there is a conflict with another Transport stream using the same ID, the field and the ID number will have a red indication!

#### Output SID

In the field Output SID you will find the actual used Output SID.

If you would like to change this, you can type a new value into the field.

*Note:*

If there is a conflict with another Output using the same ID, the field and the ID number will have a red indication!

### 5.18.2 Rename Service – IP Output

#### Rename Service

The service name for any service can be renamed. A service is renamed via the field below “Associated Services”.

### 5.18.3 Configure service type – IP Output


If the service has originated from a stream without SDT from an IP-input, then the service type will be unknown due to the missing SDT. The missing SDT will result in the service name being shown as “Unknown” in the *Type* field and it is possible to configure it. If in doubt then set the type to “MPEG 2 TV” for a TV service and “Radio” for a radio service.

### 5.18.4 PID Management – IP Output

Pressing the PID Management button opens the PID management menu.

In the PID Management window you will find the following information:

Service Name  
Output SID  
Stream Type  
Details like CAS ID, Audio type, etc.  
Original PID  
Selected YES/NO  
Conflicts  
FIXED PID  
Output PID

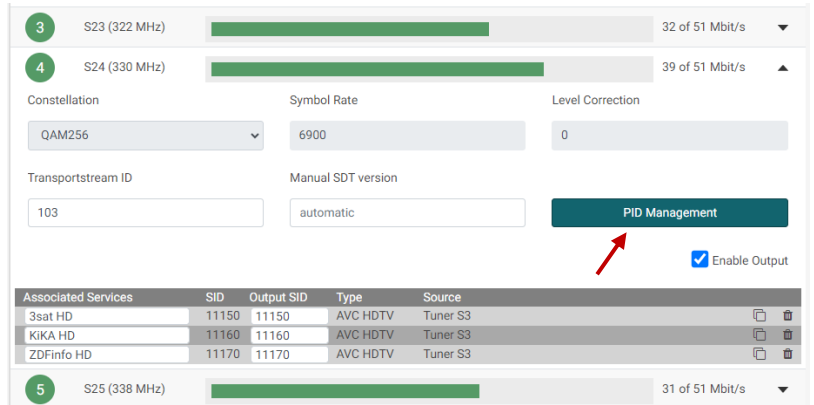

The screenshot shows the PID Management interface for a service. It includes fields for Constellation (QAM256), Symbol Rate (6900), Level Correction (0), Transportstream ID (103), and Manual SDT version (automatic). A red arrow points to the 'PID Management' button. Below these fields is a table of associated services.

Associated Services	SID	Output SID	Type	Source
3sat HD	11150	11150	AVC HDTV	Tuner S3
KIKA HD	11160	11160	AVC HDTV	Tuner S3
ZDFinfo HD	11170	11170	AVC HDTV	Tuner S3

#### Filter PID's

By deselecting the filter check box you can deselect (filter) PID's.

This can be used if you would like to reduce audio or other information from the service.

#### Fixed PID

If you enter a PID in the "FIXED PID" field the PID will be changed to this setting.

*Note:*

If a PID is used twice there will be an error indication shown and the PID with the same value will be highlighted.

### 5.18.5 Multiple services – IP Output

The TDcH & TDmH support sending out IPTV services multiple times.

This functionality can be used to send out the service with different audio languages.


This has the advantage that the services are available multiple times in the service list, so the customer can choose the service with the desired audio language by simply changing the channel. They do not have to use the audio function of the television.

With this function it is also possible to make language packages in the channel plan so the services with the same languages are in one block in the channel list.

To have a service multiple time as IPTV out select the services and generate a new IP address.

## 5.19 LCN page

At the LCN page it is possible to set the Network Settings parameters and administer the LCN (Local Channel Number) numbers.

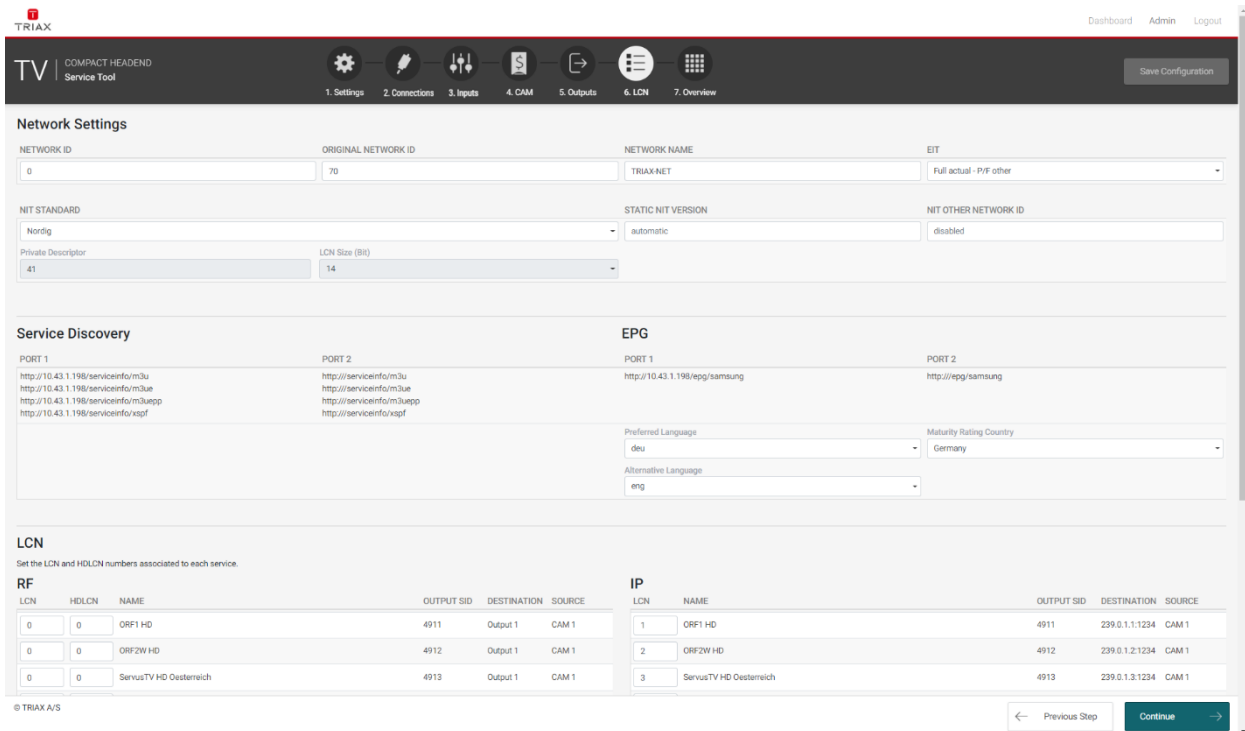

The screenshot shows the TRIAX Network Settings page. The top navigation bar includes links for Settings, Connections, Inputs, CAM, Outputs, LCN, and Overview. The main content area is divided into several sections:


- Network Settings:** Includes fields for Network ID (0), Original Network ID (70), Network Name (TRIAX-NET), EIT (Full actual - P/F other), NIT Standard (Nordig), Static NIT Version (automatic), NIT Other Network ID (disabled), Private Descriptor (41), and LCN Size (80).
- Service Discovery:** Includes fields for PORT 1 and PORT 2, and a list of services with their URLs.
- EPG:** Includes fields for Preferred Language (deu), Maturity Rating Country (Germany), and Alternative Language (eng).
- LCN:** Includes a table for LCN and HDLCN numbers associated with each service.

The LCN table has the following data:

LCN	HDLCN	NAME	OUTPUT SID	DESTINATION	SOURCE
0	0	ORF1 HD	4911	Output 1	CAM 1
0	0	ORF2W HD	4912	Output 1	CAM 1
0	0	ServusTV HD Osterreich	4913	Output 1	CAM 1

At the bottom of the page, there are buttons for "Previous Step" and "Continue".

### 5.19.1 Network Settings

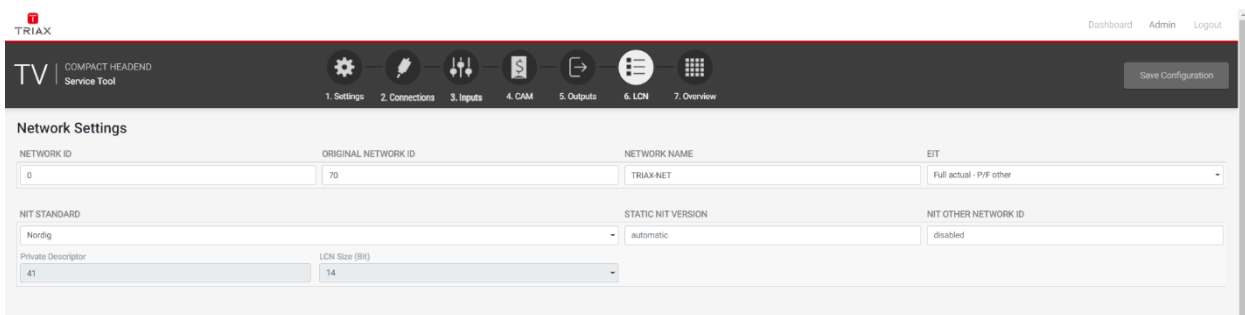

This is a duplicate of the screenshot above, showing the TRIAX Network Settings page with the same fields and data.

#### Network ID

Enter the required network ID in the Network ID field. If it is an open network, the network ID must follow the “ETSI TR 101 211” guidelines. If it is a closed network you can determine the ID yourself.

#### ORIGINAL NETWORK ID


Enter the required original network ID in the Original Network ID field.

#### NETWORK NAME

Enter a network name in the Network name field. The maximum number of characters you can enter in the field is 255.

### EIT (EPG Management)

The Event Information Table (EIT) dropdown list enables you to change the EIT settings for both DVB-T and DVB-C.

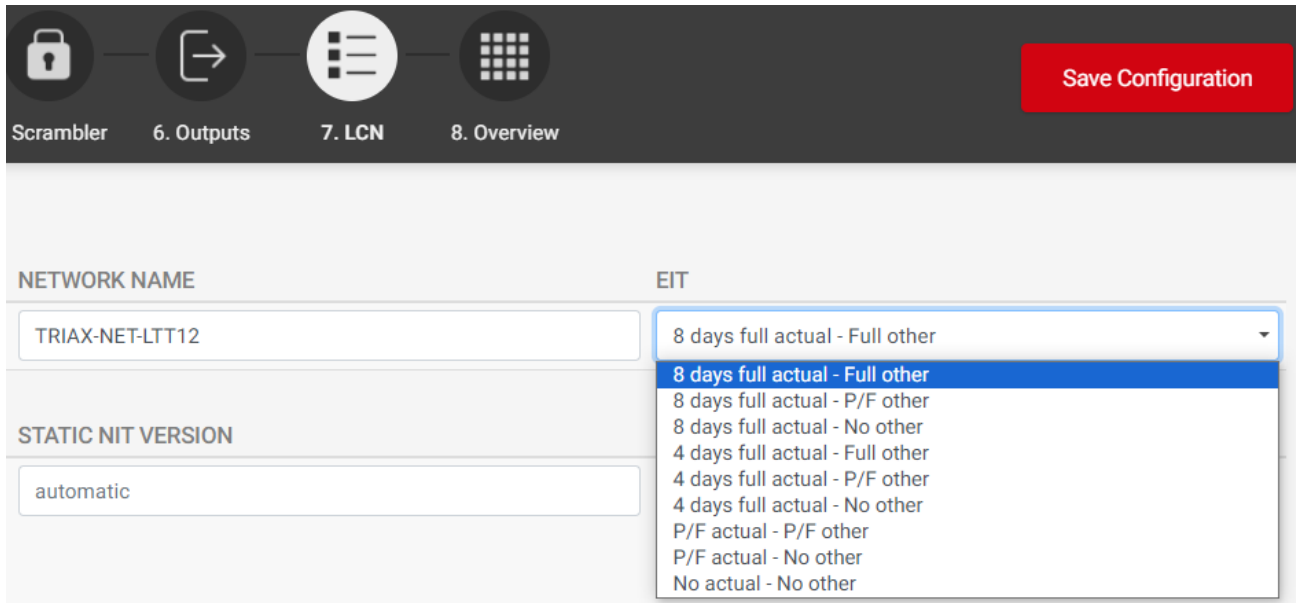

#### Note:

Please note that the TDcH & TDmH EPG management function supports 4 or 8 days EPG information per service independent of whether the EPG is set to “Full” or “P/F”. That the EPG is available at the input source is of course a general requirement.

The following settings can be set up:

- **Full Actual - Full Other (4 or 8 days)**  
All outputs will have all EIT information available, so all actual present/following, actual schedule, other present/following and other schedule EIT are sent out with all muxes.
- **Full Actual - P/F Other (4 or 8 days)**  
All outputs will have actual present/following and actual schedule EIT information, but only other present/following EIT information.
- **Full Actual - No Other (4 or 8 days)**  
All outputs will have actual present/following and actual schedule EIT information, and no other EIT information.
- **P/F Actual - P/F Other**  
All outputs will have actual present/following EIT information and other present/following EIT information only.
- **P/F Actual - No Other**  
All outputs will have actual present/following EIT information.

#### No Actual - No Other

No EIT information is output.

**NIT STANDARD**

Select which standard you want to use, DVB or NorDig. By default, DVB is selected.

**STATIC NIT VERSION ("Freeze" NIT)**

If programs in a transponder change, then the NIT is recreated. In most countries, the end user does not notice, because the receivers automatically read in the new NIT. However, in some countries (ex. France) end users are asked to start a channel search.

If it comes to the case that one or more stations have weak reception, then the NIT changes frequently and the end users are always unnecessarily prompted to start a channel search. In this case, the NIT version can be "frozen" (recommended for use in France).

Under "Static NIT version" enter a version between 1 and 31.

**Note:**

If the service list really changes, the channel search must be done manually.

**NIT OTHER NETWORK ID**

Enter the required NIT other network ID in the Network ID field.

In some countries TV's requires a Network ID in the "NIT OTHER NETWORKD ID" field to support a network search when connected to the local CATV provider. If the headend is used for such TV's it is also required to send the required NIT OTHER NETWORK ID in the EIT table.

### 5.19.2 Service Discovery

The TDcH & TDmH support different formats for external devices and end user devices to automatically get the actual service list.

It is possible to get the list of IP Out services in the following formats:

XSPF  
M3U  
Extended M3U  
Extended++ M3U

Service Discovery	
PORT 1	PORT 2
<a href="http://10.43.1.198/serviceinfo/m3u">http://10.43.1.198/serviceinfo/m3u</a>	<a href="http://serviceinfo/m3u">http://serviceinfo/m3u</a>
<a href="http://10.43.1.198/serviceinfo/m3ue">http://10.43.1.198/serviceinfo/m3ue</a>	<a href="http://serviceinfo/m3ue">http://serviceinfo/m3ue</a>
<a href="http://10.43.1.198/serviceinfo/m3uepp">http://10.43.1.198/serviceinfo/m3uepp</a>	<a href="http://serviceinfo/m3uepp">http://serviceinfo/m3uepp</a>
<a href="http://10.43.1.198/serviceinfo/xspf">http://10.43.1.198/serviceinfo/xspf</a>	<a href="http://serviceinfo/xspf">http://serviceinfo/xspf</a>

The service lists are available at Ethernet Port 1 and 2. How to get access to the data is noted in the user interface. To validate the service list, right click at the URL and select “Go to ...” and the list will pop up at another window in your browser.

#### XSPF

Sample:

```
<?xml version="1.0" encoding="UTF-8"?>
<playlist version="1" xmlns="http://xspf.org/ns/0/">
<trackList>
<track><title>DR1</title><location>udp://@239.194.0.1:50172</location>
<extension application="http://www.triax.com"><poolserviceid>4</poolserviceid></extension></track>
<track><title>Syd</title><location>udp://@239.194.0.2:50172</location>
<extension application="http://www.triax.com"><poolserviceid>6</poolserviceid></extension></track>
</trackList>
</playlist>
```

#### M3U

This service list contains

IP addresses and port numbers

Sample:

udp://239.194.0.1:50172

udp://239.194.0.2:50172

### Extended M3U

This service list is compliant to SAT>IP Protocol Specification (ver. 1.2.2) and is defined as “extended M3U channel list” In the standard under appendix A2.1

This service list contains

- IP address and port number
- Service name
- LCN

Sample:

```
#EXTM3U
#EXTINF:0,1. DR1
udp://239.194.0.1:50172
#EXTINF:0,3. Syd
udp://239.194.0.2:50172
```

### Extended++ M3U

This service list is based on the Extended M3U with further extensions.

This service list can be used for TV sets. Panasonic is one TV set vendor that supports this service list as service discovery.

This service list contains

- IP address and port number
- Service name, transport stream ID, original network ID
- LCN
- Service type (1=TV, 2=Radio)

Sample:


```
#EXTM3U
#EXTINF:0,1. DR1
udp://239.194.0.1:50172?type=1&onid=43962&tsid=0&svcid=4
#EXTINF:0,3. Syd
udp://239.194.0.2:50172?type=1&onid=43962&tsid=0&svcid=6
```

### 5.19.3 EPG

EPG for IPTV output can be pulled from the TDcH & TDmH.

The TDcH & TDmH have an integrated EPG server to support external devices with EPG data. This could be a middleware server or a TV management server or end user devices directly.


The service lists are available at Ethernet Port 1 and 2. How to get access to the data is noted in the user interface.

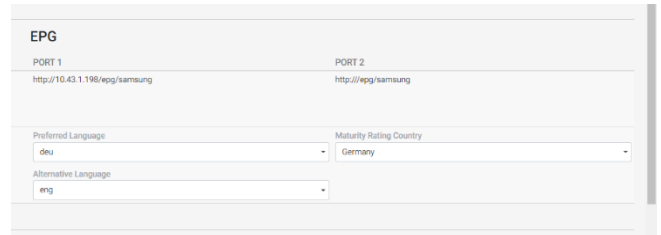

The EPG configuration interface shows two ports (PORT 1 and PORT 2) with their respective URLs. Below, there are dropdown menus for 'Preferred Language' (set to 'deu') and 'Maturity Rating Country' (set to 'Germany'). An 'Alternative Language' dropdown is also present, set to 'eng'.

### 5.19.4 LCN

Assign LCN numbers to desired services. LCN and HD-LCN numbers in the range 0 - 1023 can be set.

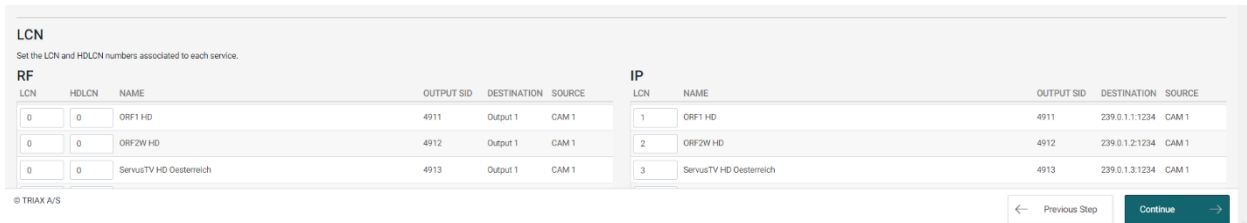


The LCN configuration interface is divided into two main sections: 'RF' (left) and 'IP' (right). Both sections have a table with columns: LCN, HDLCN, NAME, OUTPUT SID, DESTINATION, and SOURCE. The RF section shows three entries for ORF1 HD, ORF2W HD, and ServusTV HD Österreich. The IP section shows three entries for ORF1 HD, ORF2W HD, and ServusTV HD Österreich. At the bottom, there are 'Previous Step' and 'Continue' buttons.

The LCN numbers can be administered for the RF outputs (QAM and COFDM) on the left side and at the right side for the IPTV services (IP Output).

When **Continue** is pressed, the next menu pane is shown.

#### LCN auto arrange


When inserting an already existing number, the number automatically increases for that number and all higher values.

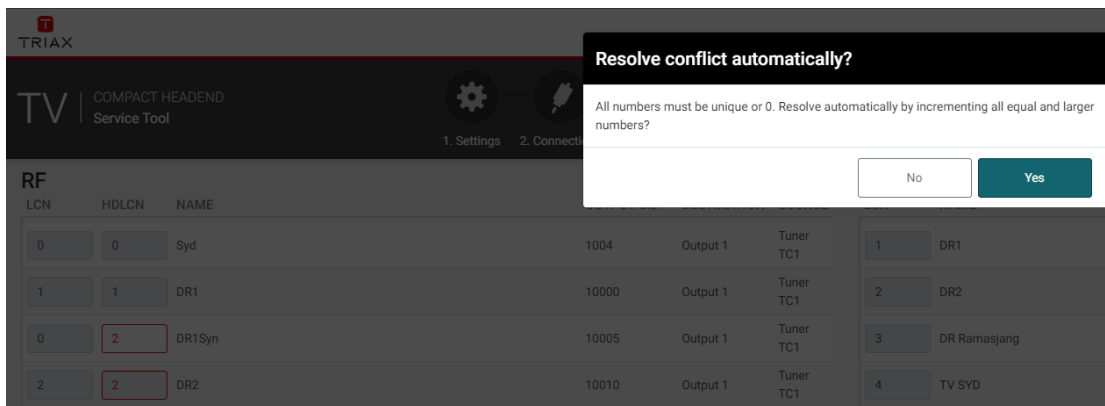

The image shows a 'Resolve conflict automatically?' dialog box with the text: 'All numbers must be unique or 0. Resolve automatically by incrementing all equal and larger numbers?'. Below the dialog is a table with columns: LCN, HDLCN, NAME, OUTPUT SID, DESTINATION, SOURCE, and TUNER. The table shows several entries, including 'Syd', 'DR1', 'DR1Syn', 'DR2', 'DR1', 'DR2', 'DR1Syn', and 'TV SYD'. The 'LCN' and 'HDLCN' columns are highlighted in red for the 'DR1Syn' and 'DR2' entries.

## 5.20 Overview

The overview page is a fast and easy overview with a “sort” and “search” function. By pressing the underlined links there is also the option to navigate direct to specific information and settings if needed. Please see mouse over description below.



Dashboard Admin Logout

TV COMPACT HEADEND Service Tool

1. Settings 2. Connections 3. Inputs 4. CAM 5. Scrambler 6. Outputs 7. LCN 8. Overview

Save Configuration

SERVICE	TYPE	SID	TSID	ONID	SOURCE	CA MODULE	SCRAMBLER	OUTPUT	OUTPUT SID	LCN	HDLCN
<input type="text" value="Q Search"/>					<input type="text" value="Q Search"/>	<input type="text" value="Q Search"/>	<input type="text" value="Q Search"/>	<input type="text" value="Q Search"/>	<input type="text" value="Q Search"/>	<input type="text" value="Q Search"/>	<input type="text" value="Q Search"/>
MTV 80s	\$ AVC TV	7825	25	70	HOR_LOW 11325H 25000	CAM 8	VSECURE	239.192.111.10:50176	7825	0	0
TV 2 HD (D)	\$ AVC HDTV	7327	71	70	HOR_LOW 10716H 25000	CAM 1	VSECURE	239.192.111.1:50176	7327	0	0
TV 2 SPORT HD	\$ AVC HDTV	7271	71	70	HOR_LOW 10716H 25000	CAM 1	VSECURE	239.192.111.2:50176	7271	0	0
TV 2 / Østjylland	\$ AVC TV	4703	63	70	HOR_LOW 10841H 25000	CAM 2	VSECURE	239.192.111.3:50176	4703	0	0
TV3 HD (D)	\$ AVC HDTV	7957	2	70	VER_LOW 11309V 25000	CAM 3	VSECURE	239.192.111.4:50176	7957	0	0
V film premiere HD	\$ AVC HDTV	4053	2	70	VER_LOW 11309V 25000	CAM 4	VSECURE	239.192.111.5:50176	4053	0	0
V film action HD	\$ AVC HDTV	7947	35	70	VER_LOW 11372V 25000	CAM 5	VSECURE	239.192.111.6:50176	7947	0	0
V film hits HD	\$ AVC HDTV	7950	35	70	VER_LOW 11372V 25000	CAM 6	VSECURE	239.192.111.7:50176	7950	0	0
V sport ultra HD	\$ AVC HDTV	7988	35	70	VER_LOW 11372V 25000	CAM 7	VSECURE	239.192.111.8:50176	7988	0	0
CNN International	\$ AVC TV	7907	25	70	HOR_LOW 11325H 25000	CAM 8	VSECURE	239.192.111.9:50176	7907	0	0
Syd	AVC TV	1004	1111	8400	DVB-T2 634 PLP-0			306.000 MHz	1004	23	23
DR1	AVC HDTV	10000	1111	8400	DVB-T2 634 PLP-0			306.000 MHz	10000	1	1
DR1Syn	AVC HDTV	10005	1111	8400	DVB-T2 634 PLP-0			306.000 MHz	10005	31	31
DR2	AVC HDTV	10010	1111	8400	DVB-T2 634 PLP-0			306.000 MHz	10010	4	4
DR2Syn	AVC HDTV	10015	1111	8400	DVB-T2 634 PLP-0			306.000 MHz	10015	32	32
DR Ramasjang	AVC HDTV	10020	1111	8400	DVB-T2 634 PLP-0			306.000 MHz	10020	5	5
TV SYD	AVC HDTV	10034	1111	8400	DVB-T2 634 PLP-0			306.000 MHz	10034	24	24
FOLKETINGET	AVC HDTV	10040	1111	8400	DVB-T2 634 PLP-0			306.000 MHz	10040	21	21
V film premiere HD	AVC HDTV	4053	2	70	VER_LOW 11309V 25000	CAM 4		322.000 MHz	4053	6	6
V film action HD	AVC HDTV	7947	35	70	VER_LOW 11372V 25000	CAM 5		322.000 MHz	7947	7	7
V film hits HD	AVC HDTV	7950	35	70	VER_LOW 11372V 25000	CAM 6		322.000 MHz	7950	8	8
V sport ultra HD	AVC HDTV	7988	35	70	VER_LOW 11372V 25000	CAM 7		330.000 MHz	7988	12	12
MTV 80s	AVC TV	7825	25	70	HOR_LOW 11325H 25000	CAM 8		330.000 MHz	7825	18	18

© TRIAX UK Ltd

Previous Step

Finish & Save

Service	Name of the TV or Radio Service
Type	Type of the Service (HD, SD, TV, Radio, ...)
SID	Service identifier of the service used at the output
TSID	Transport stream identifier used at the output
ONID	Original network identifier of the service
SOURCE	Location from where the service is received
CA MODULE	The CA module used to descramble the service
SCRAMBLER	The Scrambler used to scramble the service
OUTPUT	Output channel information of a Service
OUTPUT SID	SID at the output
LCN	Local Channel number of the Services
LCN HD	Local Channel number of the HD Services

### Alphabetic order

With a click on the Column description, for example “SERVICE”, the corresponding column will be sorted in alphabetical order. With a second click the alphabetical order is reversed.

### Search

In the Search fields it is possible to search for specific text. Start typing and the list will show only names with the characters included in the same row as in the search field.


### Mouseover

Mouseover entries can be clicked to switch to the main table of this entry.

## 5.20.1 Export to Excel

The service list for all services from the system outputs, can be accessed directly via an URL without login. The URL is [x.x.x.x/serviceinfo/overview](http://x.x.x.x/serviceinfo/overview). This will result in a semicolon “;” separated list. If the list shall be separated by comma “,” then use the URL [x.x.x.x/serviceinfo/overview?delim=comma](http://x.x.x.x/serviceinfo/overview?delim=comma). If the overview shall be download directly to a file, use the URL [x.x.x.x/serviceinfo/overviewfile](http://x.x.x.x/serviceinfo/overviewfile).

[This file can also be downloaded in the GUI via Admin/Download Service Overview. See below.](#)

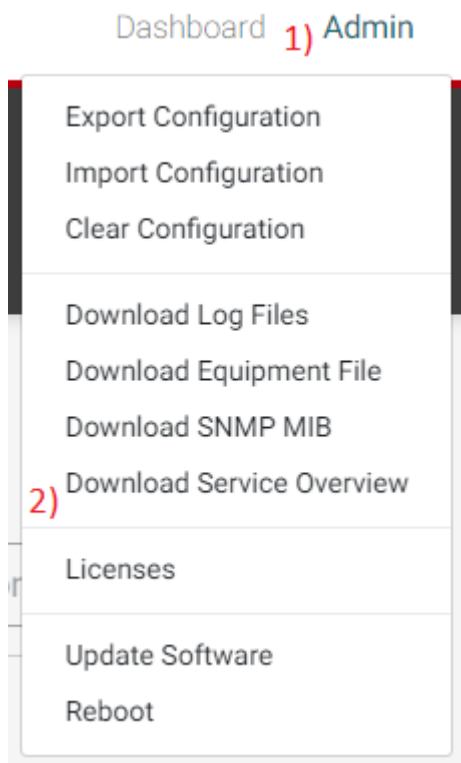

As an alternative it is easy to copy the information from the Overview page as shown below.

Step 1. Mark the information in the overview and copy the information with Ctrl+C

Overview										
SERVICE	TYPE	SID	TSID	ONID	TUNER	CA MODULE	OUTPUT	OUTPUT SID	LCN	HDLCN
Q Search					Q Search	Q Search	Q Search	Q Search	Q Search	Q Search
BR Fernsehen Süd HD	AVC HDTV	10325	31	3	DVB-C 306		306.000 MHz	10325		
NDR FS SH HD	AVC HDTV	10330	31	3	DVB-C 306		306.000 MHz	10330		
PHOENIX HD	AVC HDTV	10331	31	3	DVB-C 306		306.000 MHz	10331		
Welt der Wunder	MPEG2 TV	13103	31	3	DVB-C 306		306.000 MHz	13103		
RTLplus Austria	AVC TV	325	13	3	DVB-C 314		NaN MHz	325		
Fashion TV HD	AVC HDTV	425	13	3	DVB-C 314		NaN MHz	425		
HGTV	MPEG2 TV	426	13	3	DVB-C 314		NaN MHz	426		
TOGGO plus	MPEG2 TV	529	13	3	DVB-C 314		NaN MHz	529		
ATV	MPEG2 TV	10120	13	3	DVB-C 314		NaN MHz	10120		
ORF2 V	MPEG2 TV	10128	13	3	DVB-C 314		NaN MHz	10128		
ORF1	MPEG2 TV	13001	13	3	DVB-C 314		NaN MHz	13001		
ProSieben Austria	MPEG2 TV	20002	13	3	DVB-C 314		NaN MHz	20002		
SAT.1 A	MPEG2 TV	20005	13	3	DVB-C 314		NaN MHz	20005		
ORF1 HD	AVC HDTV	4911	1007	1	DVB-S2 11303H 22000	CAM 1	NaN MHz	4911		

Step 2. Open a new Excel Sheet and paste the information with Ctrl+V

Mappe2 - Excel


DateiStartEinfügenSeitenlayoutFormelnDatenÜberprüfenAnsichtHilfePower PivotWas möchten Sie tun?

E27

	A	B	C	D	E	F	G	H	I	J	K	L
1												
2	SERVICE		TYPE	SID	TSID	ONID	TUNER	CA MODULE	OUTPUT	OUTPUT SID	LCN	HDLCN
3												
4	BR Fernsehen Süd HD		AVC HDTV	10325	31	3	DVB-C 306		306.000 MHz	10325		
5	NDR FS SH HD		AVC HDTV	10330	31	3	DVB-C 306		306.000 MHz	10330		
6	PHOENIX HD		AVC HDTV	10331	31	3	DVB-C 306		306.000 MHz	10331		
7	Welt der Wunder		MPEG2 TV	13103	31	3	DVB-C 306		306.000 MHz	13103		
8	RTLplus Austria		AVC TV	325	13	3	DVB-C 314		NaN MHz	325		
9	Fashion TV HD		AVC HDTV	425	13	3	DVB-C 314		NaN MHz	425		
10	HGTV		MPEG2 TV	426	13	3	DVB-C 314		NaN MHz	426		
11	TOGGO plus		MPEG2 TV	529	13	3	DVB-C 314		NaN MHz	529		
12	ATV		MPEG2 TV	10120	13	3	DVB-C 314		NaN MHz	10120		
13	ORF2 V		MPEG2 TV	10128	13	3	DVB-C 314		NaN MHz	10128		
14	ORF1		MPEG2 TV	13001	13	3	DVB-C 314		NaN MHz	13001		
15												
16												

### Note:

To paste the information into Excel please use the function only Text so that no format is taken over.

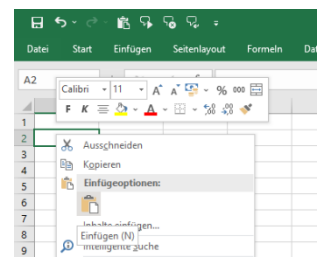

## 5.21 Direct access via URL

Following functions can be accessed directly via an URL:

URL	Function	Description
<a href="#">x.x.x.x/epg/samsung</a>	EPG in Samsung XML format	Offers EPG for all IPTV out services in Samsung XML format
<a href="#">x.x.x.x/serviceinfo/m3u</a>	List of IPTV out services in m3u format.	See section “Service Discovery”
<a href="#">x.x.x.x/serviceinfo/m3ue</a>	List of IPTV out services in m3u extended format.	See section “Service Discovery”
<a href="#">x.x.x.x/serviceinfo/m3uepp</a>	List of IPTV out services in m3u extended++ format.	See section “Service Discovery”
<a href="#">x.x.x.x/serviceinfo/overview</a>	List all services output at the system in CVS format with semicolon as separator.	See section “Export to Excel”
<a href="#">x.x.x.x/serviceinfo/overview?delim=comma</a>	List all services output at the system in CVS format with comma as separator.	See section “Export to Excel”
<a href="#">x.x.x.x/serviceinfo/overviewfile</a>	List all services output at the system as a CVS file with semicolon as separator.	See section “Export to Excel”
<a href="#">x.x.x.x/serviceinfo/overviewfile?delim=comma</a>	List all services output at the system as a CVS file with comma as separator.	See section “Export to Excel”

## 5.22 Direct file download via URL

Following files can be downloaded directly to browser “Default Download” via an URL:


URL	File	Description
<a href="#">x.x.x.x/logfile</a>	tdch_logfile.zip	Zipped log files
<a href="#">x.x.x.x/mib</a>	TRIAX-TDCH_MIB.txt	MIB file as txt file. Some SNMP managers support importing in other file formats like *.mib. If your SNMP manager doesn’t support the txt file, then rename it to e.g. *.mib.


## 6 Support


Contact your local sales representative for support information in your language, or alternatively

Go to [www.triax.com](http://www.triax.com).

for English support.

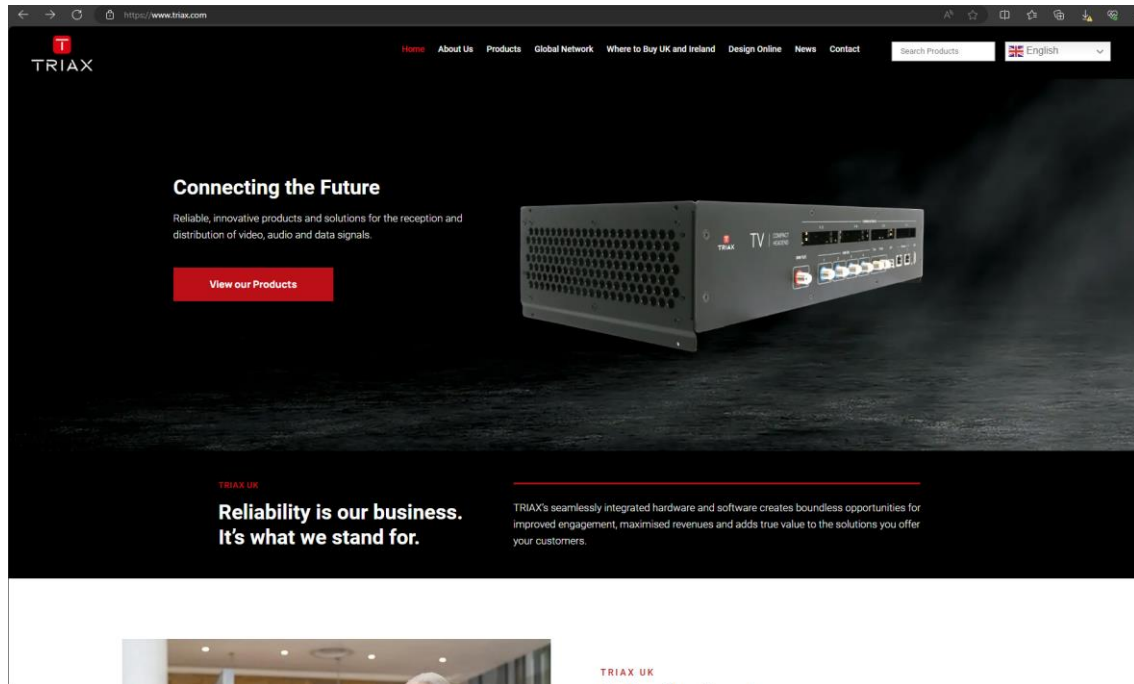

Below the *Contact* menu you will find additional help and support information.

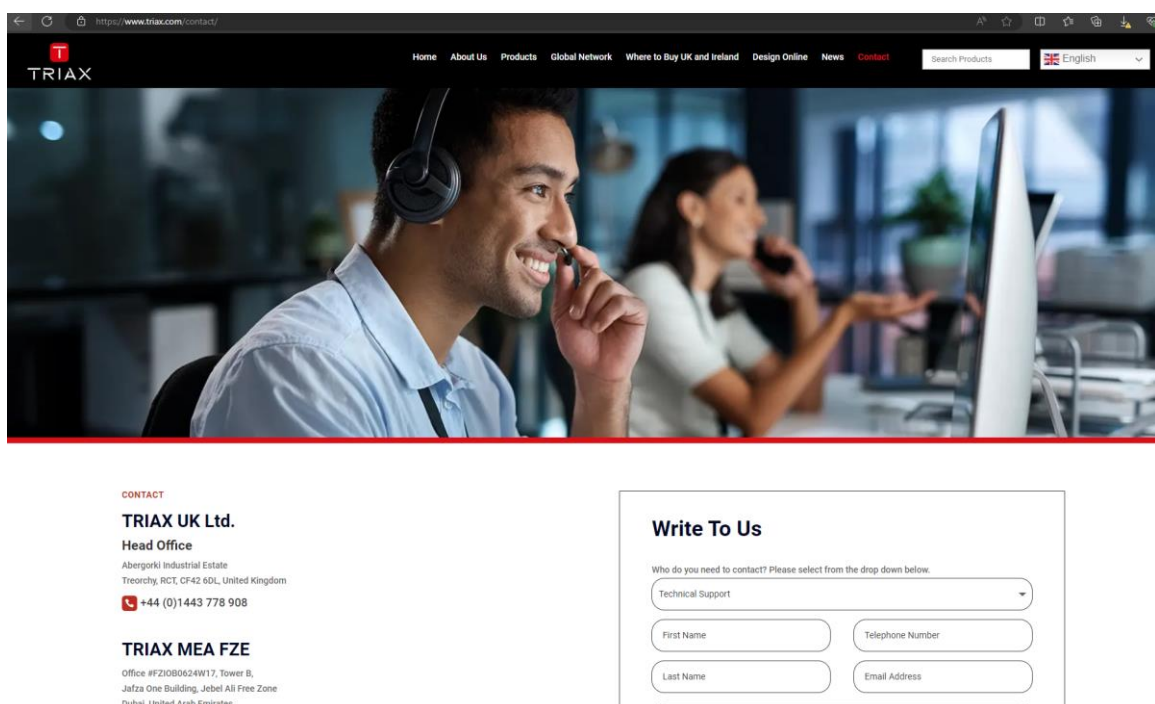

## 7 Terms and Abbreviations

Term	Explanation
TBA	To Be Added
TBD	To Be Determined
PID	Packet Identification; According to standard ISO 13818-1
SID	Service Identification; According to standard ISO 13818-1
TSID	Transport Stream Identification
NIT	Network Identification Table; According to standard ETSI EN 300 468
NID	Network Identification used in NIT; According to standard ETSI EN 300 468
ONID	Original Network Identification used in NIT; According to standard ETSI EN 300 468
STB	Set Top Box; DVB/IP receiver that is connected to a TV set
Receiver	A device that receives a signal from a headend. An example could be a TV-set or a STB.
end-user	A person that uses a TV or receiver.
Installer	A person that installs, deploys, and maintains the headend system
i/f	Interface
TS	Transport Stream; According to standard ISO 13818-1
ES	Elementary Stream; According to standard ISO 13818-1
Service	According to ETSI EN 300 468